

# AUDIO-VIDEO SURROUND RECEIVER

# KR-V7080/V8080

# SERVICE MANUAL

# KENWOOD

© 1996-3/B51-5162-00 (K/K) 3823

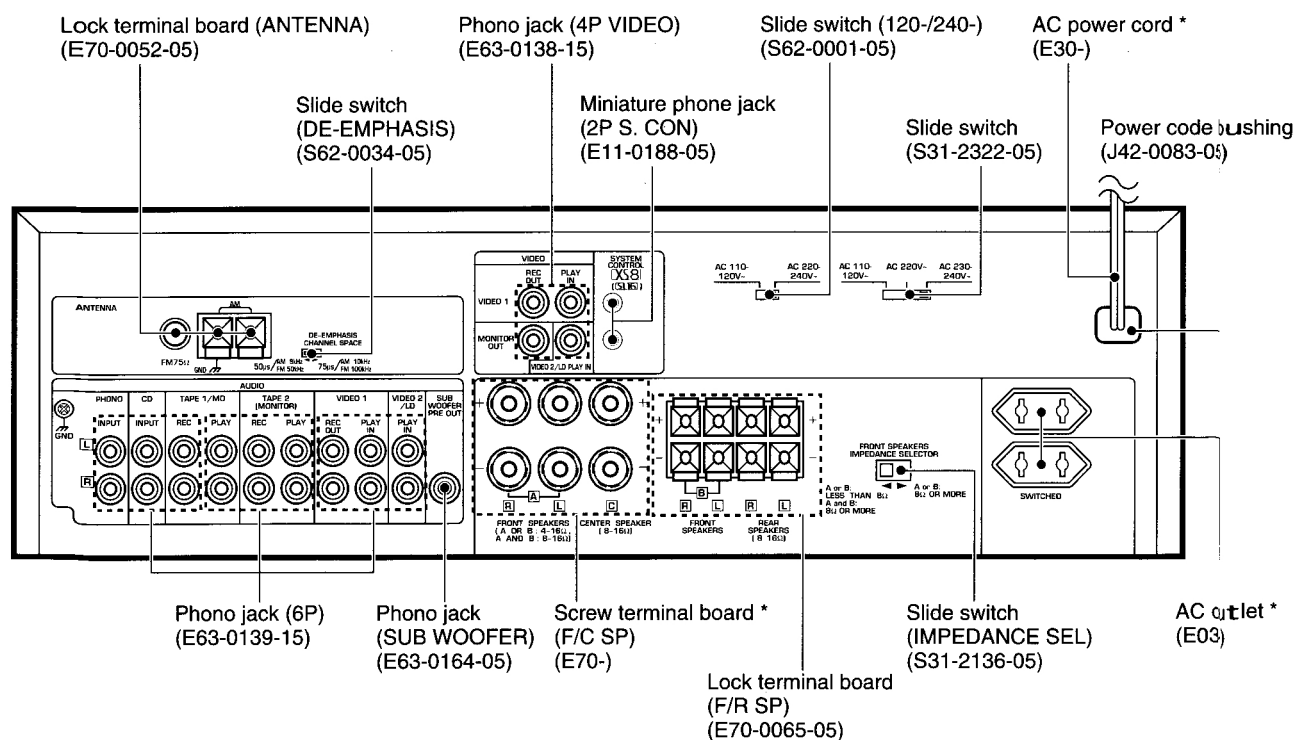
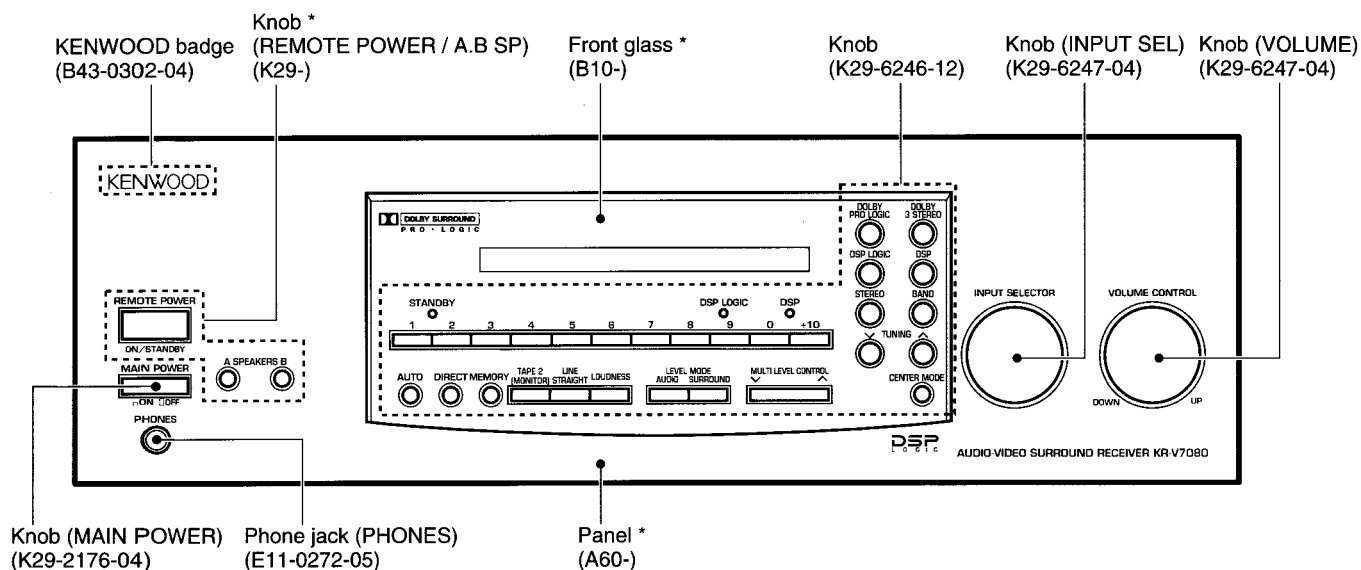


Illustration is KR-V7080.

\* Refer to parts list on page 44.

# KR-V7080/V8080


## CONTENTS / ACCESSORIES

### Contents


CONTENTS / ACCESSORIES .....	2	PC BOARD .....	18
CONTROLS .....	3	SCHEMATIC DIAGRAM .....	23
BLOCK DIAGRAM .....	5	EXPLODED VIEW (UNIT).....	43
CIRCUIT DESCRIPTION .....	6	PARTS LIST .....	44
ADJUSTMENT .....	16	SPECIFICATIONS .....	53
WIRING DIAGRAM .....	17		

### Accessories


FM indoor antenna .....(1)  
(T90-0810-05)




AM loop antenna ass'y .....(1)  
(T90-0195-05)



Loop antenna stand  
(J19-3645-05)




Remote control unit .....(1)  
(A70-1042-05) :  
RC-R0803 for K,P,Y,X,M,C  
(A70-1042-05) :  
RC-R0803 for T,E  
BATTERY COVER :  
(A09-0169-08)




Batteries (R6/AA) .....(2)

(-)




AC plug adaptor .....(1)  
(E03-0115-05) : M only



# KR-V7080/V8080

## CONTROLS

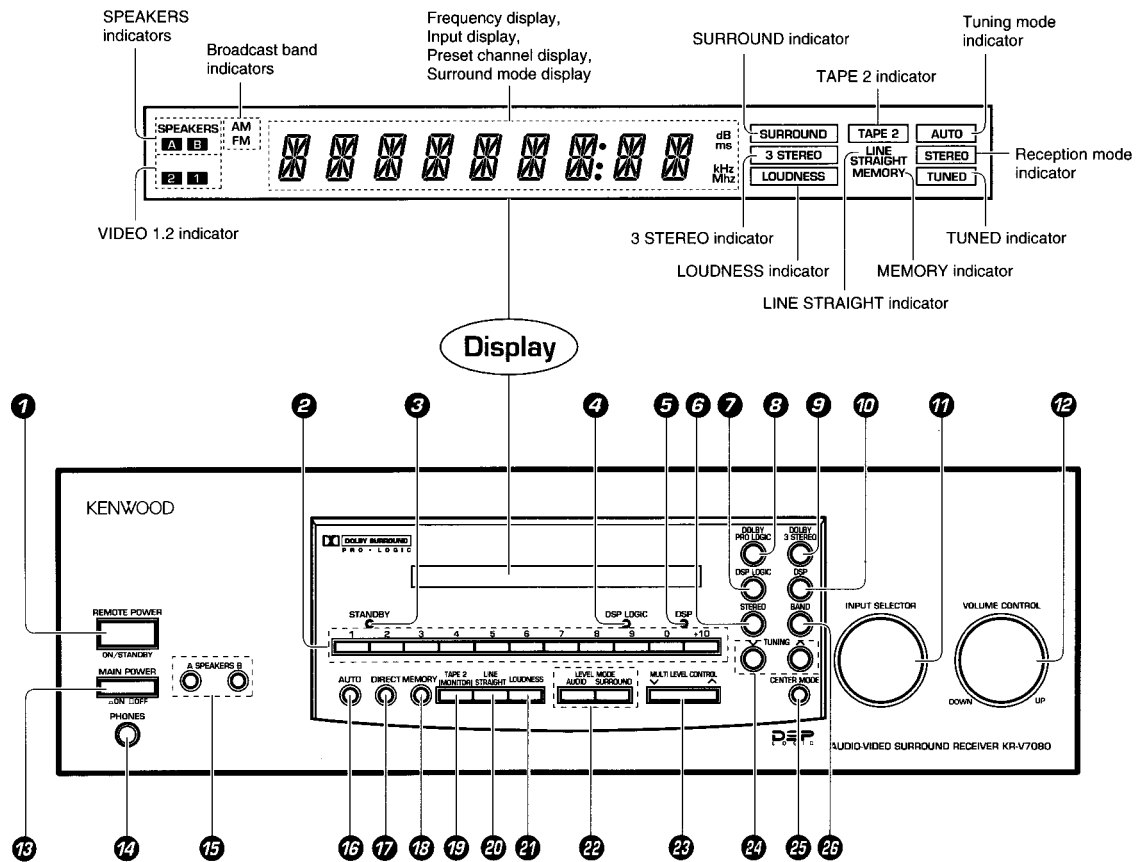

### 1 REMOTE POWER key

Press to switch over the STANDBY/ON modes when the MAIN POWER is ON.

### 2 NUMERIC KEYS

### 3 STANDBY indicator

### 4 DSP LOGIC indicator

Lights when the DSP LOGIC mode is ON.

### 5 DSP indicator

Lights when the DSP presence mode is ON.

### 6 STEREO key

Press to cancel the surround modes.

### 7 DSP LOGIC key

### 8 DOLBY PRO LOGIC key

### 9 DOLBY 3 STEREO key

### 10 DSP key

### 11 INPUT SELECTOR Knob

Turn to select the input sources.

### 12 VOLUME CONTROL Knob

### 13 MAIN POWER switch

Press to switch the main power ON/OFF.

### 14 PHONES jack

Used for headphone listening.

### 15 SPEAKERS A/B keys

Press to select the A and/or B speaker systems.

### 16 AUTO key

Press for select the auto tuning mode.

### 17 DIRECT key

Press for direct station tuning based on numerical input.

### 18 MEMORY key

Press to preset a station in the memory.

### 19 TAPE 2(MONITOR) key

Press to monitor the sound being recorded.

### 20 LINE STRAIGHT key

Press to listen to a source with high quality sound.

### 21 LOUDNESS key

Press to enhance low frequencies.

### 22 LEVEL MODE (AUDIO, SURROUND) keys

**AUDIO key :**

Press when adjusting the tone.

**SURROUND key :**

Press when adjusting the surround modes.

### 23 MULTI LEVEL CONTROL key

Press to adjust the tone or surround mode setting.

### 24 TUNING keys

Press to tune broadcast stations.

### 25 CENTER MODE key

Press to select the center mode in the DOLBY PRO LOGIC surround mode.

### 26 BAND key

Press to switch the broadcast band.

## STANDBY mode of REMOTE POWER key

When the power cord of this system is plugged in to a power outlet and the **MAIN POWER** switch is pressed to ON, the **STANDBY** indicator lights up regardless of the **REMOTE POWER** key setting. This indicates that a small amount of current is being supplied to the unit to back up the memory contents. This mode is referred to as the Standby mode. While the **STANDBY** indicator is lit, the power of the system can also be switched ON/OFF from the remote control unit.

# KR-V7080/V8080


## REMOTE CONTROL OPERATION

The remote control unit provided with unit functions in the following two modes so that it can be used to control other KENWOOD system components as well as video components from other manufacturers.

**KENWOOD component control mode** ..... This mode is used to control the KENWOOD source components including cassette decks and a CD player. (The controlled components must be connected to this unit through system control cords.)


**Video component control mode** ..... This mode allows to control the basic operations of video components from KENWOOD as well as other manufacturers.

Some of the keys act in different ways depending on the modes described above. Therefore, be sure to adjust the required mode before pressing these keys.

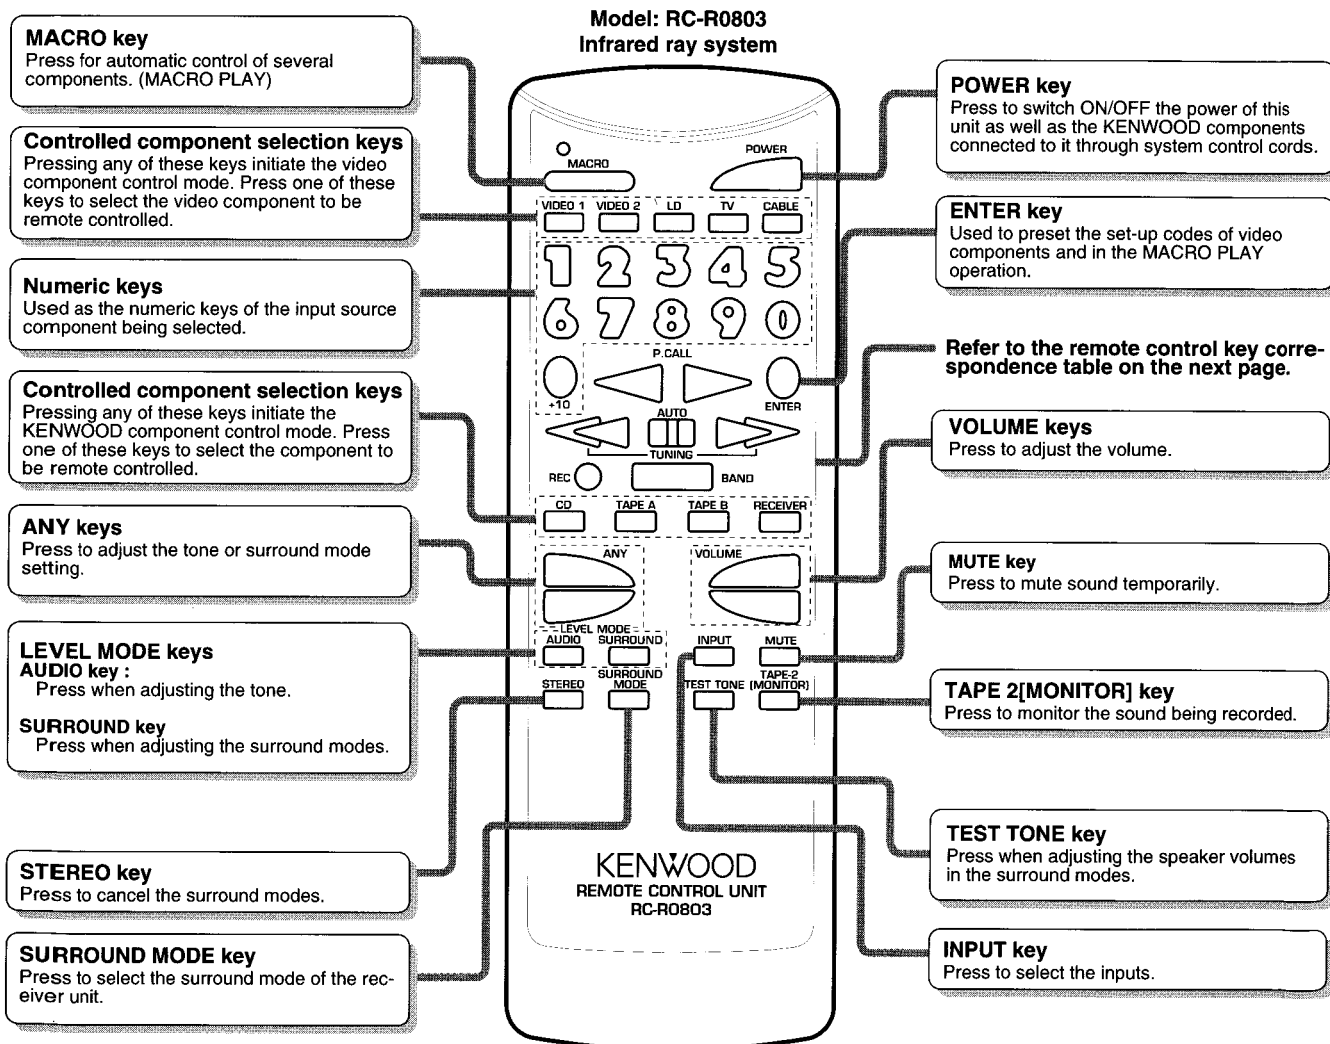


### Loading batteries


① Remove the cover.



② Insert batteries.




③ Close the cover.



• Insert two AA-size (R6 / SUM-3) batteries as indicated by the polarity marking.



## BLOCK DIAGRAM



# KR-V7080/V8080

## CIRCUIT DESCRIPTION

### 1. INITIAL STATE

#### (1) POWER OFF

#### (2) AMP-related block

• AUDIO SELECTOR	TUNER
• VIDEO SELECTOR	VIDEO 1
• SPEAKER A	ON
• SPEAKER B	OFF
• TAPE 2 MONITOR	OFF
• LINE STRAIGHT	OFF
• AUDIO ADJUST MODE	BALANCE
• BASS	0 dB
• TREBLE	0 dB
• SUB WOOFER	0 step
• BALANCE	CENTER
• VOLUME	7 step
• LOUDNESS	OFF

#### (3) SURROUND-related block

• SURROUND MODE	STEREO (SURROUND OFF)
• SURROUND ADJUST MODE	DELAY
• DELAY TIME	
DSP/DSP LOGIC	30ms
DOLBY PRO LOGIC	20ms
• CENTER LEVEL	0 dB
• REAR LEVEL	0 dB
• CENTER MODE	NORMAL
• DSP MODE	ARENA
• DSP LOGIC MODE	LARGE

#### (4) Tune-related block

• BAND	FM
• FREQUENCY	Lower-limit value of FM (87.50 MHz)
• AUTO MODE	AUTO
• P.CH DISPLAY	-- CH

#### (5) TEST PRESET FREQUENCY

Channel	BAND	K1 TYPE	BAND	K2 TYPE	BAND	E TYPE
01ch	FM	87.50MHz	FM	87.50MHz	FM	87.50MHz
02ch	FM	98.00MHz	FM	98.00MHz	FM	98.00MHz
03ch	FM	108.00MHz	FM	108.00MHz	FM	108.00MHz
04ch	AM	630kHz	AM	630kHz	AM	630kHz
05ch	AM	1000kHz	AM	1000kHz	AM	999kHz
06ch	AM	1440kHz	AM	1440kHz	AM	1440kHz
07ch	FM	87.50MHz	FM	87.50MHz	FM	87.50MHz
08ch	FM	87.50MHz	FM	87.50MHz	FM	87.50MHz
09ch	FM	87.50MHz	FM	87.50MHz	FM	87.50MHz
10ch	FM	89.10MHz	FM	89.10MHz	FM	89.10MHz
11ch	FM	90.00MHz	FM	90.00MHz	FM	90.00MHz
12ch	FM	97.50MHz	FM	97.50MHz	FM	97.50MHz
13ch	FM	98.50MHz	FM	98.50MHz	FM	98.50MHz
14ch	FM	106.00MHz	FM	106.00MHz	FM	106.00MHz
15ch	AM	530kHz	AM	530kHz	AM	531kHz
16ch	AM	990kHz	AM	990kHz	AM	990kHz
17ch	AM	1700kHz	AM	1610kHz	AM	1602kHz
18ch	FM	87.50 MHz	FM	87.50MHz	FM	87.50MHz
19ch	FM	87.50MHz	FM	87.50MHz	FM	87.50MHz
20ch	FM	87.50MHz	FM	87.50MHz	FM	87.50MHz

The initial setting is performed in a following event :

1. When backup memory data is destroyed when reset is applied to the microprocessor.
2. When the power cord is plugged in to the AC wall outlet while pressing the POWER key.

# KR-V7080/V8080

## CIRCUIT DESCRIPTION

### 2. BACKUP

This function holds the current state of the unit even if the AC power of the AV receiver is turned OFF.

#### (1) Operation outline

The backup state set command signal (CE) of a microcomputer is set low when the AC power is turned OFF. The microcomputer detects the signal and enters the stop state.

The microcomputer is reset when the AC power is turned ON. The data for backup state confirmation is checked by reset processing.

The microcomputer is initialized when the data was destroyed. If it is not destroyed, the microcomputer is started in the backup state.

- The data for backup state confirmation is written in a RAM area.
- The microcomputer is set to the STOP mode so as to save the power consumption.
- A backup state set command signal is detected by a timer interrupt of 1 msec.
- The backup guarantee period is set in a circuit.

#### (2) Backup state setting

- The data (A596H/5A69H) for backup state confirmation is written in a RAM area.
- Setting the special function port

Set the input/output port of a serial interface to the serial interface operation stop mode. Set the FIP controller to the display OFF mode.
- Setting the microcomputer's internal special function

Set all the interrupt enable flags to the disable state, respectively. Set the microcomputer to the STOP mode and stop the system clock oscillation of the microcomputer.

#### (3) Contents of backup data to be held

- POWER ON/OFF state
  - VOLUME LEVEL date
  - BALANCE LEVEL date
  - N.B.ON/OFF
  - SELECTOR SOURCE
- — — TUNER — — —
- LAST BAND
  - RECEIVING STATION FREQUENCY data
  - PRESET MEMORY data (1ch~40ch)
  - AUTO/MANUAL mode

— — — AMP — — —

- POWER STANDBY ON/OFF
- SELECTOR SOURCE
- VIDEO OUT SOURCE
- TAPE2 MONITOR ON/OFF
- SPEAKER A RELAY ON/OFF
- SPEAKER B RELAY ON/OFF
- VOLUME LEVEL VALUE
- AUDIO ADJUST MODE
- BALANCE LEVEL VALUE
- BASS LEVEL
- TREBLE LEVEL
- SUB WOOFER LEVEL
- LINE STRAIGHT ON /OFF
- LOUDNESS ON/OFF

— — — SURROUND — — —

- SURROUND MODE
- DSP MODE
- DSP LOGIC MODE
- CENTER MODE
- SURROUND ADJUST MODE
- DELAY TIME
- CENTER LEVEL
- REAR LEVEL

### 3. PROTECTION

The protection state is entered when abnormality is detected during the POWER-ON sequence.

- The power and speaker are turned OFF when the abnormal state is detected during the POWER-ON sequence.
- The STANDBY LED blinks every 500 msec.
- The fluorescent display indicator goes OFF.

# KR-V7080/V8080

## CIRCUIT DESCRIPTION

### 4. DESTINATION LIST OF TUNER

Table 4-1 Destination List of Tuner

Destination	BAND	Receive frequency range	channel space	1F	PLL reference frequency	Destination DSW(X14-)		
						DSW2 D31	DSW1 D16	DSW0 D29
K1	FM	87.5MHz~108.0MHz	100kHz	+10.7MHz	25kHz	0	0	0
	AM	530kHz~1700kHz	10kHz	+450kHz	10kHz			
K2	FM	87.5MHz~108.0MHz	100kHz	+10.7MHz	25kHz	0	0	1
	AM	530kHz~1610kHz	10kHz	+450kHz	10kHz			
E1	FM	87.5MHz~108.0MHz	50kHz	+10.7MHz	25kHz	0	1	1
	AM	531kHz~1602kHz	9kHz	+450kHz	9kHz			
E3 (RDS)	FM	87.5MHz~108.0MHz	50kHz	+10.7MHz	25kHz	1	0	1
	AM	531kHz~1602kHz	9kHz	+450kHz	9kHz			
M	KZ/E1 changes by only setting "DSW1". (DSW 1=0 : K2 Type, 1 : E1 Type)					0	X	1

**DIODE SW(DSWX)** : 0 = Without DIODE (When static, input LOW)

1 = With DIODE(When static, input HIGH)

X = TRANSISTOR SW (0 = OFF 1=ON)

#### ※ ATTENTION

A SUB WOOFER output signal is output irrespective of SP selector switch (ASP and BSP) ON/OFF setting

The RDS PTY AF search always corresponds to a span search of 100kHz. Therefore, a span search of 50 kHz cannot be performed.

### 5. TEST MODE

#### 5-1. TEST MODE OF MAIN UNIT

##### (1) Setting the test mode

The main unit is put into the test mode when the AC power is turned ON while pressing the "TUNING DOWN" key. The following state is obtained when the test mode of the main unit set.

- The power is turned ON automatically.
- All the fluorescent display indicators and LEDs light.  
(The all-illuminated state is cleared by pressing any main unit key. )
- The backup state except when the power is turned ON and OFF is initialized.

##### (2) Canceling the test mode

Turn OFF the AC power.

##### (3) Tuner functions

- Preset channel call function
  - 1) Calls channels 1 to 9 (keys 1 to 9) and channel 10 (key 0) when the 10 key is not operated.
  - 2) Calls channels 11 to 19 (keys 1 to 9) and channel 20 (key 0) when the +10 key is operated once.
  - 3) Calls channels 21 to 29 (keys 1 to 9) and channel 30 (key 0) when the +10 key is operated two times and calls channels 31 to 39 (keys 1 to 9) and channel 40 (key 0) when the +10 key is operated three times.

- 4) Shifts to the operation obtained when the +10 key is not operated if it is operated four times.

- S level hexadecimal data display function  
With the selector on TUNER, when the "DOLBY PRO LOGIC" key on the main unit is operated, the frequency display ceases and the S level is displayed in hexadecimal while the key is pressed.

When "3 STEREO" is operated, the display is switched to restore the normal display.

- Mute signal output  
No Selector MUTE(MUTE 1) control regulation is done whatever.
- With the selector on TUNER, when the "SP A" key on the main unit is operated, the SP A display is erased and ATT is on. If the "SP A" on the main unit is operated again after that, SP A is displayed and ATT is switched OFF. The SP A operation and ATT operation work together and are combined with switching the ATT display ON and OFF.

※ Under the ATT ON/OFF relationship, ATT can not be entered in an AF search in test mode.

The ATT operation is done from ATT OFF.

If SP A was turned OFF with the selector on something other than TUNER, it will come on when TUNER is selected.

# KR-V7080/V8080

## CIRCUIT DESCRIPTION

### (4) AMP function

The original function of each key is executed when the SELECTOR mode is set to TUNER. The test mode operation is not performed in this case.

- One touch max, mid, min setting for Audio Level and Surround Level

The variation of Audio Level and Surround Level can be operated by turning the Multi-Level UP or DOWN and, if the selector is on something other than TUNER, max, mid, min settings can be made with the number keys.

- 1) Max is number key "2"
- 2) Mid is number key "3"
- 3) Min is number key "1"
- 4) The Mid setting is as follows:

Master VOL. DELAY is the initial value

Balance is centered

BASS, TREBLE, SUB-WOOFER, CENTER and REAR are 0 dB or 0 step

Effect is 1 step

### (5) EFFECT is 0 step for Min and 2 step for Max.

- One touch settings for Audio Level and Surround Level items

The variation of Audio Level and Surround Level items can be set with respective keys and, if the selector is on something other than TUNER, direct settings can be made with the number keys.

- 1) Balance is number key "4"
- 2) Bass is number key "5"
- 3) Treble is number key "6"
- 4) Sub-Woofer is number key "7"
- 5) Rear Level is number key "8"
- 6) Center Level is number key "9"
- 7) Delay Time is number key "0"
- 8) Effect Level is number key "+10"

- TEST TONE operation

Uses the "DIRECT" key instead of the "TEST TONE" key.

- MUTE signal output

Sets the analog muting to OFF at all times. No control is performed in this case. Sets the analog muting to ON in the same way as during normal operation when the front volume is set to the minimum value( $-\infty$  dB).

- Impedance 4/8 selection

No impedance 4/8 display appears in the normal state. Therefore, the SPEAKERS lamp of the fluorescent display indicator is turned ON and OFF in the test mode.

The SPEAKERS lamp is turned ON when the impedance is 4.

The SPEAKERS lamp is turned OFF when the impedance is 8.

- MUTE Operation

Mute operation is toggled ON and OFF by pressing the "AUTO/MANUAL" key.

## 5-2. SERIAL TEST MODE

### (1) Setting the serial test mode

The unit is put into the serial test mode when a serial code "TEST ON" is input during the POWER-ON sequence.

In the 8-bit serial test mode, serial code 71H is input.

In the 16-bit serial test mode, serial code C27FH is input.

- In the serial test mode, all remote control keys and ordinary serial codes are disabled. Only the panel keys perform the same operation as usually.

### (2) Canceling the serial test mode

- The serial test mode is canceled to return to the ordinary mode by inputting a "TEST OFF" code. After the ordinary mode was returned, the serial mode is returned to the state before the test mode is entered.  
The backup operation is not initialized.
- The serial test mode is also canceled when the AC power is turned OFF.

### (3) Cautions

- The serial test code is prescribed as a 16-bit code only.
- The operations below are inhibited in the serial test mode.  
Manual tuning UP/DOWN operation  
UP/DOWN selection in PTY selection mode  
AF search in ATT ON state  
The operations mentioned above cannot be guaranteed when they are performed in the serial test mode.
- An identical code is output when the serial test mode code is input.
- A TUNED ON/TUNED OFF code is only output.

### (4) The serial test mode codes for ATT ON/OFF operate in the same way as for test mode with the main unit keys.

(SP A also goes ON/OFF as ATT goes on/off.)

- Under the ATT ON/OFF relationship, ATT can not be entered in an AF search in test mode.

The ATT operation is done from ATT OFF.

If SP A was turned OFF with the selector on something other than TUNER, it will come on when TUNER is selected.

# KR-V7080/V8080

## CIRCUIT DESCRIPTION

### (5) SERIAL TEST CODE LIST (C2XXH)

TYPE FUNC	AMP								TUNER							
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	POWER OFF	CD DIRECT OFF	SP B OFF	DUAL SOUND LEVEL1	NB OFF				POWER OFF	0	MEMORY (ENTER)					
1	POWER ON	CD DIRECT ON	SP B ON	DUAL SOUND LEVEL2	OMNI SP ON	FRONT SP ON			POWER ON	1	MAIN					
2	PHONO	CD REC OFF	HIT MASTER OFF	DUAL SOUND LEVEL3	MUTING (-30dB) OFF	FRONT SP OFF			MUTE OFF	2	SUB					
3	CD	CD REC ON	HIT MASTER ON	DUAL SOUND INPUT CD	MUTING (-30dB) ON	C/S SP ON			MUTE ON	3	BOTH					
4	TUNER	SOURCE DIRECT OFF	MOTOR VOL UP	DUAL SOUND INPUT TUNER	NB LEVEL1	C/S SP OFF			AUTO STEREO	4	AF					
5	TAPE (TAPE A)	SOURCE DIRECT ON	MOTOR VOL DOWN	DUAL SOUND INPUT TAPE	NB LEVEL2	C/S MUTE ON			MONO	5	PTY					
6	TAPE2 (TAPE B)	LINE STRAIGHT OFF	MOTOR VOL STOP	DUAL SOUND INPUT MD/DAT	NB LEVEL3	VIDEO5			TUNED OFF	6	DISPLAY					
7	AUX	SINE STRAIGHT ON	DBS/TV	DUAL SOUND INPUT VIDEO	BALANCE Lch MAX	MENU			TUNED ON	7						
8	DAT	LOUDNESS OFF	TAPE2 MONITOR OFF	DUAL SOUND INPUT AV/AUX	BALANCE Lch/Rch CENTER	tone CONTROL OFF			ACTIVE RECEPTION OFF	8						
9	VIDEO1 (VIDEO)	LOUDNESS ON	TAPE2 MONITOR ON	BGM OFF	BALANCE Rch MAX	tone CONTROL ON		FL ALL OFF OFF	ACTIVE RECEPTION ON	9						FL ALL OFF OFF
A	VIDEO2	SUB SONIC OFF	VIDEO MUTE ON	BGM ON	L.A.C. MAIN MAX	BASS MIN		FL ALL OFF ON	RF DIRECT	+10						FL ALL OFF ON
B	VIDEO3	SUB SONIC ON	LAC VOL UP	FAN OFF	L.A.C. MAINSUB CENTER	BASS MID		ALL ON OFF	ATT ON	BAND FM						ALL ON OFF
C	VIDEO4 (VDP)	SUPER WOOFER OFF	LAC VOL DOWN	FAN ON	L.A.C. SUB MIN	BASS MIX		ALL ON ON	ATT OFF	BAND AMMW						ALL ON ON
D	MUTE ON (MAIN)	SUPER WOOFER ON	LAC VOL STOP	FAN SPEED LOW	FAN STOP LOW	TREBLE MIN		AMP INITIAL	IF NORMAL	BAND TV/LW						TUNER SERIAL TEST OFF
E	SEL MUTE ON	SPEAKER A OFF (FRONT)	DUAL SOUND OFF	FAN SPEED HIGH	FAN STOP HIGH	TREBLE MID		AMP SERIAL TEST OFF	IF NARROW	DOWN						TUNER SERIAL TEST OFF
F	MUTE ALL OFF	SPEAKER A ON (FRONT)	DUAL SOUND ON	NB ON		TREBLE MAX		AMP SERIAL TEST ON	DIRECT	UP						TUNER SERIAL TEST ON

□ : Sending code    ■ : Receiving code

### (C3XXH)

TYPE FUNC	SURROUND								GE							
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	POWER OFF	REAR MUTE ON	ASFC MAX	ACOUSTIC BGM	PRESENCE GAME	ECHO 2	SUB WOOFER LEVEL MIN		POWER OFF	EQ JAZZ						
1	POWER ON	MUTE ALL OFF	SEAT POS MIN	CINEMA SCREEN OFF	PRESENCE KARAOKE	PRESENCE HIT MASTER	SUB WOOFER LEVEL MID		POWER ON	EQ FUSION						
2	STEREO BYPASS/OFF	CENTER LEVEL MIN	SEAT POS MID	CINEMA SCREEN 1	F.2ch	THX	SUB WOOFER LEVEL MAX		MUTE OFF	EQ MOVIE						
3	DOLBY SURROUND NORMAL/WID	CENTER LEVEL MID	SEAT POS MAX	CINEMA SCREEN 2	DOLBY SURROUND (PHANTOM)	MONO			MUTE ON							
4	DOLBY 3 STEREO	CENTER LEVEL MAX	WALL MIN	CINEMA SCREEN 3	DEPTH OFF	INPUT LEVEL MIN			EQ OFF							
5	DSP	REAR R LEVEL MIN	WALL MID	CH MODE 2ch	DEPTH ON	INPUT LEVEL MID			EQ ON							
6	DSP LOGIC	REAR R LEVEL MID	WALL MAX	CH MODE 3ch	DEPTH MODE VOCAL	INPUT LEVEL MAX			M1 (ALL CEN)							
7	S 4ch	REAR R LEVEL MAX	ROOM SIZE MIN	CH MODE 4ch	DEPTH MODE INSTRUMENT	FRONT L LEVEL MIN			M2 (ALL MAX)							
8	F 4ch	DELAY TIME MIN	ROOM SIZE MID	CH MODE 5ch	DEPTH LEVEL MIN	FRONT L LEVEL MID			M3 (ALL MIN)							
9	CENTER MODE NORMAL	DELAY TIME MID	ROOM SIZE MAX	DSP THROUGH	DEPTH LEVEL MID	FRONT L LEVEL MAX		FL ALL OFF OFF	EEPROM TEST							FL ALL OFF OFF
A	CENTER MODE WIDE	DELAY TIME MAX	STEREO (KARAOKE)	DSP ARENA	DEPTH LEVEL MAX	FRONT R LEVEL MIN		FL ALL OFF ON	EEPROM TEST OK							FL ALL OFF ON
B	CENTER MODE PHANTOM	(PRESENCE) EFFECT LEVEL MIN	MULTI (KARAOKE)	DSP JAZZ CLUB	SUB(OMNI) MUTE ON	FRONT R LEVEL MID		ALL ON OFF	EEPROM TEST NG							ALL ON OFF
C	TEST TONE OFF	(PRESENCE) EFFECT LEVEL MID	HIFI MULTI (KARAOKE)	DSP STADIUM	DSP LOGIC LARGE	FRONT R LEVEL MAX		ALL ON ON	LINE ON							ALL ON ON
D	TEST TONE ON	(PRESENCE) EFFECT LEVEL MAX	NORMAL (KARAOKE)	PRESENCE DISCO THEQUE	DSP LOGIC SMALL	REAR L LEVEL MIN		SURROUND INITIAL	TAPE ON							GE INITIAL
E	FRONT MUTE ON	ASFC MIN	ACOUSTIC NON DIRE1	PRESENCE CHURCH	ECHO OFF	REAR L LEVEL MID		SURROUND SERIAL TEST OFF	EQ POP							GE SERIAL TEST OFF
F	CENTER MUTE ON	ASFC MID	ACOUSTIC NON DIRE2	PRESENCE MOVIE	ECHO 1	REAR L LEVEL MAX		SURROUND SERIAL TEST ON	EQ ROCK							GE SERIAL TEST ON

□ : Sending code    ■ : Receiving code

# KR-V7080/V8080

## CIRCUIT DESCRIPTION

(C4XXH)

H L	VOLUME LEVEL															
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	VOLUME 0	VOLUME 16	VOLUME 32	VOLUME 48	VOLUME 64											
1	VOLUME 1	VOLUME 17	VOLUME 33	VOLUME 49	VOLUME 65											
2	VOLUME 2	VOLUME 18	VOLUME 34	VOLUME 50	VOLUME 66											
3	VOLUME 3	VOLUME 19	VOLUME 35	VOLUME 51	VOLUME 67											
4	VOLUME 4	VOLUME 20	VOLUME 36	VOLUME 52	VOLUME 68											
5	VOLUME 5	VOLUME 21	VOLUME 37	VOLUME 53	VOLUME 69											
6	VOLUME 6	VOLUME 22	VOLUME 38	VOLUME 54	VOLUME 70											
7	VOLUME 7	VOLUME 23	VOLUME 39	VOLUME 55	VOLUME 71											
8	VOLUME 8	VOLUME 24	VOLUME 40	VOLUME 56	VOLUME 72											
9	VOLUME 9	VOLUME 25	VOLUME 41	VOLUME 57	VOLUME 73											
A	VOLUME 10	VOLUME 26	VOLUME 42	VOLUME 58	VOLUME 74											
B	VOLUME 11	VOLUME 27	VOLUME 43	VOLUME 59	VOLUME 75											
C	VOLUME 12	VOLUME 28	VOLUME 44	VOLUME 60	VOLUME 76											
D	VOLUME 13	VOLUME 29	VOLUME 45	VOLUME 61	VOLUME 77											
E	VOLUME 14	VOLUME 30	VOLUME 46	VOLUME 62	VOLUME 78											
F	VOLUME 15	VOLUME 31	VOLUME 47	VOLUME 63												

 : Sending code     : Receiving code

# KR-V7080/V8080


## CIRCUIT DESCRIPTION

### 6. Microprocessor : $\mu$ PD78044AGF160 (X14 : IC1) $\mu$ PD78045AGF027

#### Block diagram

$\mu$ PD78044AGF160 [K, P, M, X, Y, type]

$\mu$ PD78045AGF027 [E, T type]

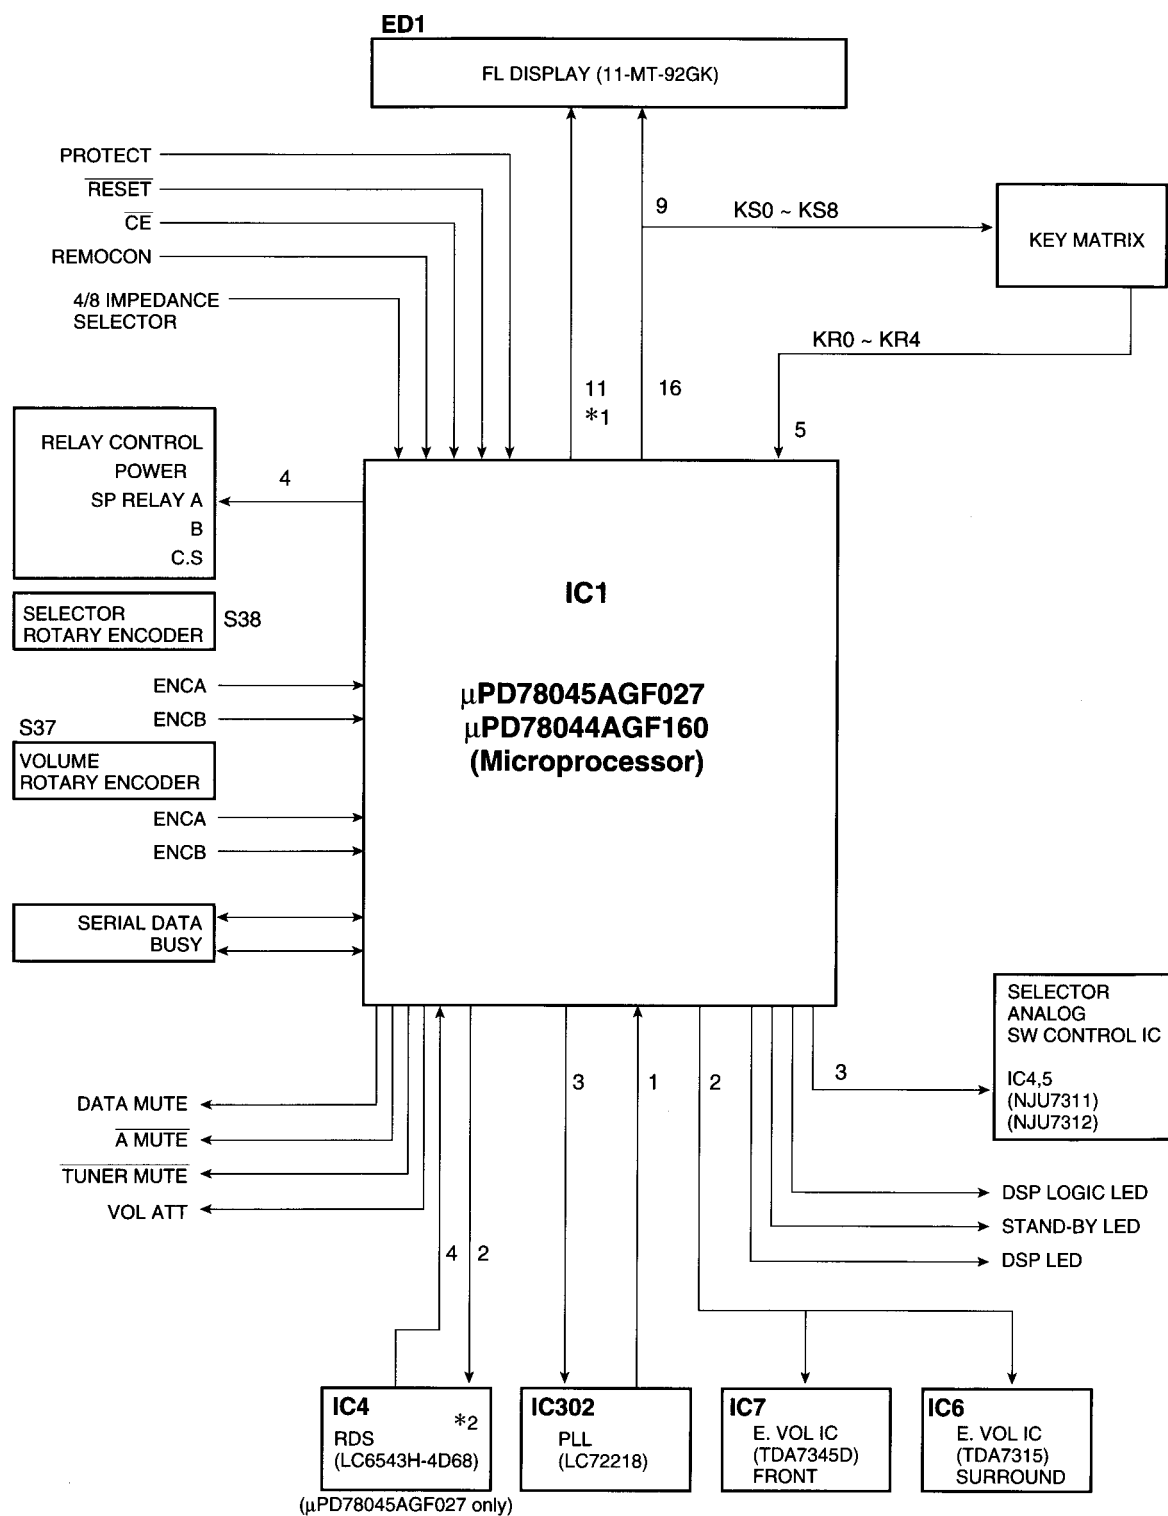

\*1 GRID to FL

\*2 E3 Type (RDS feature installed) used RDS cynic microprocessor (LC6543H-4D68).



# KR-V7080/V8080

## CIRCUIT DESCRIPTION

### 6-1. PIN FUNCTION

Pin NO.	Pin name	Port I/O	Name	Description	Active
1	P94/FIP6	O	5G	FL grid 5	_____
2	P93/FIP5	O	6G	FL grid 6	_____
3	P92/FIP4	O	7G	FL grid 7	_____
4	P91/FIP3	O	8G	FL grid 8	_____
5	P90/FIP2	O	9G	FL grid 9	_____
6	P81/FIP1	O	10G	FL grid 10	_____
7	P80/FIP0	O	11G	FL grid 11	_____
8	Vcc	—	VDD	Micro processor power supply	_____
9	P27/SCK0	I/O	PROTECT/CLK	IN : Protection detection OUT : Control IC clock	H : ON
10	P26/S00/SBI	—	DATA	OUT : PLL IC/Selector IC/Surround IC control data	_____
11	P25/S10/SB0	O	SUR ST.	Surround IC strobe	H : NORMAL L : TRANSFER
12	P24/BUSY	O	SEL ST.	Selector IC strobe	H : NORMAL L : TRANSFER
13	P23/STB	O	POWER RELAY	Power relay control	H : ON
14	P22/SCK1	O	SP B RELAY	Speaker B relay control	H : ON L : OFF
15	P21/S01	O	SP A RELAY	Speaker A relay control	H : ON L : OFF
16	P20/SI1	O	SP CS RELAY	Surround speaker relay control	H : ON L : OFF
17	RESET	I	RESET	Microprocessor reset	L : RESET ON
18	P74	I	4/8 SELECT	IN : Speaker impedance selector	H : 4Ω L : 8Ω
19	P73	I	CE	AC OFF(MAIN POWER) detection Signal	L : AC OFF
20	AVSS	—	AVSS	A/D power SUPPLY (GND)	_____
21	P73/P17/AN17	O	A MUTE	Volume IC address/data CE Analog mute signal	L : ON
22	P16/AN16	O	TUNER MUTE	Tuner mute control	L : MUTE ON
23	P15/AN15	I	STEREO	Stereo signal detection	L : STEREO ON
24	P14/AN14	I	SD	Synchronized signal detection	_____
25	P13/AN13	I	DO	IF count data (PLL DO)	_____
26	P12/AN12	O	CE(PLL)	PLL Chip enable control	_____
※27	P11/AN11	O	ATT (RDS)	Attenuate control	H : ON
※28	P10/AN10	I	S.LEVEL (RDS)	Signal level	H : ON
29	A Vcc	—	VDD	A/D power supply	_____
30	A Vref	—	+5V	A/D reference voltage	_____
31	P04/XT1	I	VOLUME ENCB	Volume encoder input B	_____
32	XT2	—	NC		_____
33	Vss	—	Vss	Microprocessor power supply	_____
34	X1	—	OSC	4.19MHz oscillator	_____
35	X2	—	OSC	4.19MHz oscillator	_____
36	P37	I	VOLUME ENCA	Volume encoder in put A	_____
37	P36/BUZ	O	SDA	Electric volume IC control data	_____
38	P35/PCL	O	SCL	Electric volume IC control clock	_____
39	P34/T12	I	SELECTOR ENCB	Selector encoder input B	_____
40	P33/T11	I	SELECTOR ENCA	Selector encoder input A	_____
41	P32/T02	I/O	S.DATA	8/16 bit system data	_____
42	P31/T01	I/O	S.BUSY	8/16 bit system busy	H : BUSY L : READY
※43	P30/T00	O	RES (RDS)	RDS IC reset signal	L : RESET ON
※44	P03/INTP3/C10	I	CLK (RDS)	RDS clock	_____

※E/T type only, other types unused.

# KR-V7080/V8080

## CIRCUIT DESCRIPTION

Pin NO.	Pin name	Port I/O	Name	Description	Active
※45	P02/INTP2	I	DATA(RDS)	RDS data	_____
※46	P01/INTP1	I	START(RDS)	RDS data start signal	L : START
47	P00/INTP0/TI	I	REM	Remote control input	_____
48	IC	—	Vss		_____
49	P72	O	STANDBY LED	Standby LED	L : LED ON
50	P71	O	DSP LOGIC LED	DSP LOGIC LED	L : LED ON
51	P70	O	DSP LED	DSP LED	L : LED ON
52	VDD	—	VDD	Microprocessor power supply (+5V)	_____
53	P127/FIP33	O	VOL ATT	Volume(-12.5dB) attenuate signal	H : ATT ON L : ATT OFF
54	P126/FIP32	O	DATA MUTE	Data mute control	H : ON
55	P125/FIP31	I	KR4	Key return 4	_____
56	P124/FIP30	I	KR3	Key return 3	_____
57	P123/FIP29	I	KR2	Key return 2	_____
58	P122/FIP28	I	KR1	Key return 1	_____
59	P121/FIP27	I	KR0	Key return 0	_____
60	P120/FIP26	O	P16KS8	FL Segment 16/key scan 8	_____
61	P117/FIP25	O	P15/KS7	FL Segment 15/key scan 7	_____
62	P116/FIP24	O	P14/KS6	FL Segment 14/key scan 6	_____
63	P115/FIP23	O	P13/KS5	FL Segment 13/key scan 5	_____
64	P114/FIP22	O	P12/KS4	FL Segment 12/key scan 4	_____
65	P113/FIP21	O	P11/KS3	FL Segment 11/key scan 3	_____
66	P112/FIP20	O	P10/KS2	FL Segment 10/key scan 2	_____
67	P111/FIP19	O	P9/KS1	FL Segment 09/key scan 1	_____
68	P110/FIP18	O	P8/KS0	FL Segment 08/key scan 0	_____
69	P107/FIP17	O	P1	FL Segment 1	_____
70	P106/FIP16	O	P2	FL Segment 2	_____
71	V load	—	V load	FL drive power supply (-30V)	_____
72	P105/FIP15	O	P3	FL Segment 3	_____
73	P104/FIP14	O	P4	FL Segment 4	_____
74	P103/FIP13	O	P5	FL Segment 5	_____
75	P102/FIP12	O	P6	FL Segment 6	_____
76	P101/FIP11	O	P7	FL Segment 7	_____
77	P100/FIP10	O	G1	FL grid 1	_____
78	P97/FIP9	O	G2	FL grid 2	_____
79	P96/FIP8	O	G3	FL grid 3	_____
80	P95/FIP7	O	G4	FL grid 4	_____

※The RDS PTY AF search always corresponds to a span search of 100kHz. Therefore, a span search of 50 kHz cannot be performed.

# KR-V7080/V8080

## CIRCUIT DESCRIPTION

### 7. KEY MATRIX

[( ) :  $\mu$ -com IC port]

Table 7-1 Key Matrix List

KRTN KSCN	KR0 (59)	KR1 (58)	KR2 (57)	KR3 (56)	KR4 (55)
KS0 (68)	—	*1 RDS PTY	*1 RDS AF	*1 RDS DISPLAY	—
KS1 (67)	6 (10KEY)	5 (10KEY)	—	LOUDNESS	TAPE 2
KS2 (66)	7 (10KEY)	4 (10KEY)	—	MEMORY	LINE STRAIGHT
KS3 (65)	8 (10KEY)	3 (10KEY)	+10	DIRECT	AUDIO LEVEL MODE
KS4 (64)	9 (10KEY)	2 (10KEY)	REMOTE POWER	AUTO	SURROUND LEVEL MODE
KS5 (63)	0 (10KEY)	1 (10KEY)	SPEAKER A	SPEAKER B	MULTI DOWN
KS6 (62)	PRO LOGIC	DSP LOGIC	STEREO	TUNING DOWN	MULTI UP
KS7 (61)	3 STEREO	DSP	BAND	TUNING UP	CENTER MODE
KS8 (60)	* 3 DSW0	* 3 DSW1	* 3 DSW2	* 2 DSW3	—

\* 1 The destination is E3 type only. For another destination, there is no key. (RDS function)

\* 2 Used for operation selector of 8- or 16- bit serial data.

\* 3 Used for discrimination of the destination. (Refer to the Destination List of Tuner in Table 5-1.)

### 8. XS8/XL16 Function

Implements an additional operation by the system in order to shift a system operated by XS8 to SL16.

#### 8-1. Addition of a selector source

Adding a system operation adds selector sources MD and LD and controls MD and LD system operation.

##### (1) Selector source switching

MD and LD are switched as TAPE1 and VIDEO2 background modes separately from the normal selector functions.

- Switch the selector source by holding down the AUTO panel key for at least two seconds.

TAPE1 -> MD

VIDEO2 -> LD

(If another key is entered while the key is being entered, the key input is set to off and the key is made ineffective.)

When a MD or LD is used, the MD is connected to the RCA Pin of TAPE1 and the LD to the RCA Pin/Video Input of VIDEO2.

- The operation of the system controls only the currently selected source and has no control whatsoever over the operation of the side which is not selected.

For example, while MD is selected, even if the "Deck B Play" serial code is received, MD will remain selected without switching from MD to TAPE1.

##### (2) Settings during microprocessor backup or initialization

- During microprocessor initialization the selector is set to TAPE1 and VIDEO2. The current selector mode (TAPE1/MD and VIDEO2/LD) is maintained except when the backup is disrupted.

##### (3) Other items be noted

- This selector switching function has been developed in accordance with new serial codes. Therefore, if XS8 is used, since there is no code for MD and LD, the selector

source function will not work if the 8/16-bit serial mode is 8-bit. It works only in 16-bit mode.

Also, if serial mode has been switched from 16-bit to 8-bit when MD and LD are being selected, it will force a switch to TAPE1 and VIDEO2.

#### 8-2. Changeover preference order

- Pressing KEY, then turn on power.



- Backup data of ①.



- Diode matrix changeover.

#### 8-3. XS8 / SL16 Selection

- KS8 and KR3 are used for the operation selection of 8- or 16- bit serial data. The 8- and 16- bit serial data are selected only during reset initialization.

Table 8-1 8-/16- bit Selection

Serial cord	DSW	DSW3
8- bit serial		0
16- bit serial		1

### 9. System operation of SL16

Easy operation one way amplifier and receiver. Other source devices are compatible with one-way and two-way easy operation. Operation is 16-bit.

Operation is two way and compatible with operating mode display. Also, adding MD and LD to input selector makes it compatible with easy operation. Apart from TUNER, source devices are operating mode display compatible and input selector MD and LD compatible. Since it is not possible for the amplifier and receiver to be always compatible with operating mode displays, they are only input selector MD and LD compatible and SL16 compatible.

# KR-V7080/V8080

## ADJUSTMENT

FM SECTION      SELECTION : FM  
KR-V7080 (E,T TYPE)

NO.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	TUNER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
1	DISCRIMINATOR	(A) 98.0kHz 1kHz, $\pm 40$ kHz dev. (E,T type) 60 dB $\mu$ (ANT input)	Connect a DC voltmeter between TP3 and TP4 (X14-) (B/6)	MONO 98.0MHz	L 303 (X14-) (B/6)	0V	(a)
2	DISTORTION (STEREO)	(C) 98.0MHz 1kHz, $\pm 40$ kHz dev. Pilot: $\pm 6$ kHz dev. 60dB $\mu$ (ANT input)	(B)	AUTO 98.0MHz	A301 (X14-) (B/6)	Minimum distortion.	(a)

KR-V7080 (OTHER TYPE) / KR-V8080


NO.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	TUNER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
1	DISTORTION (STEREO)	(C) 98.0MHz 1kHz, $\pm 67.5$ kHz dev. Pilot: $\pm 7.5$ kHz dev. 60dB $\mu$ (ANT input)	(B)	AUTO 98.0MHz	A301 (X14-) (B/6)	Minimum distortion.	(a)

### AUDIO SECTION


NO.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	TUNER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
POWER: ON      SPEAKER: B      SELECTOR: PHONO							
1	IDLE CURRENT		(E) Connect a DC voltmeter across CP1(L) CP2(R) CP3(CENTER) CP4(REAR) (X09-) (A/4)	Volume: 0	VR1(L) VR2(R) VR3(CENTER) VR4(REAR) (X09-) (A/4)	20mV	(b)

(a)

(b)

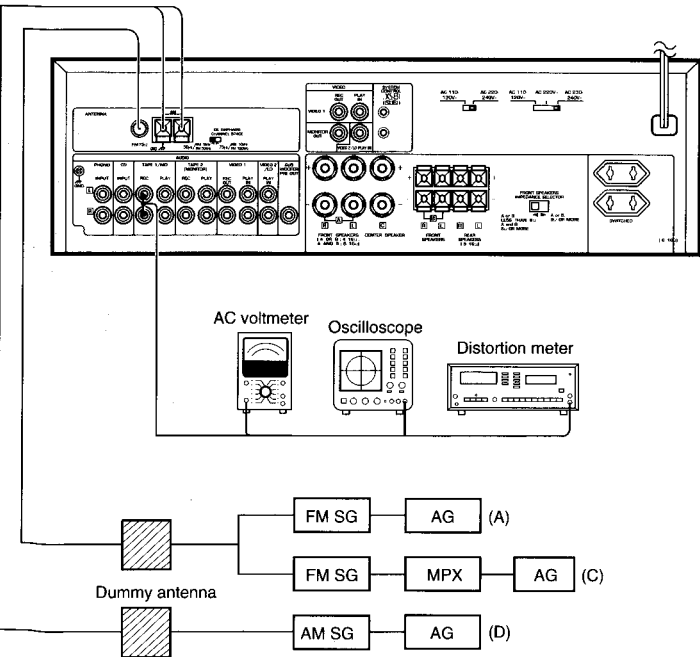


### System connections

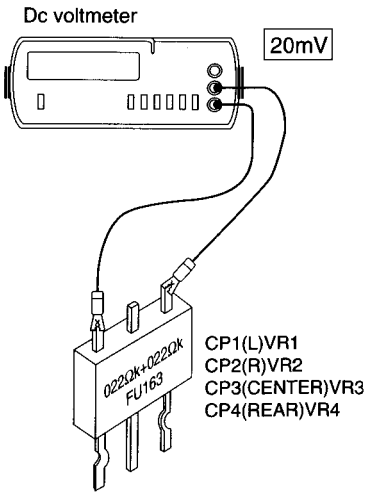

# KR-V7080/V8080


## WIRING DIAGRAM

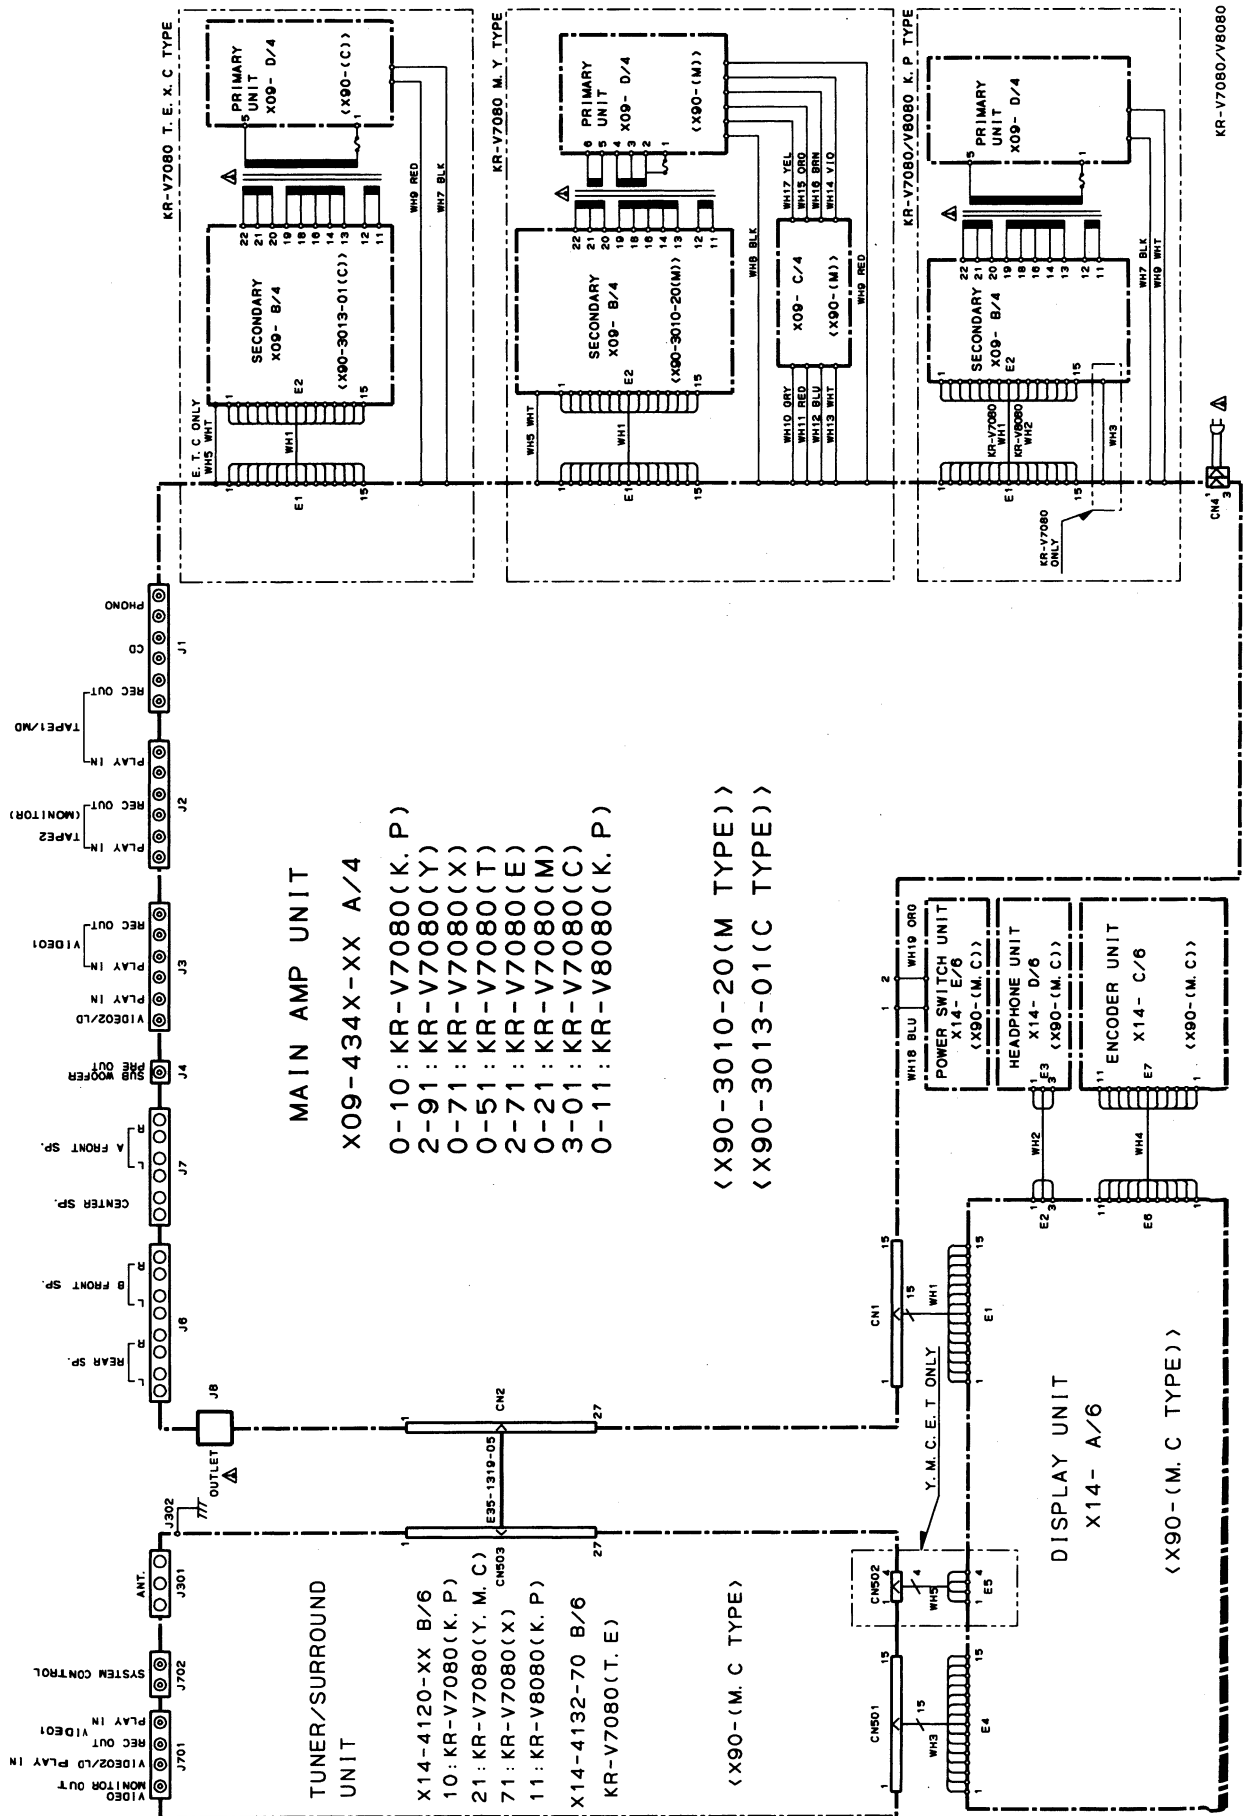

# PC BOARD (Component side view)

## DISPLAY unit (X14-41xx-xx)

20-10 : KR-V7080 K,P  
 20-21 : KR-V7080 Y,M,C  
 20-71 : KR-V7080 X  
 32-70 : KR-V7080 T,E  
 20-11 : KR-V8080 K,P

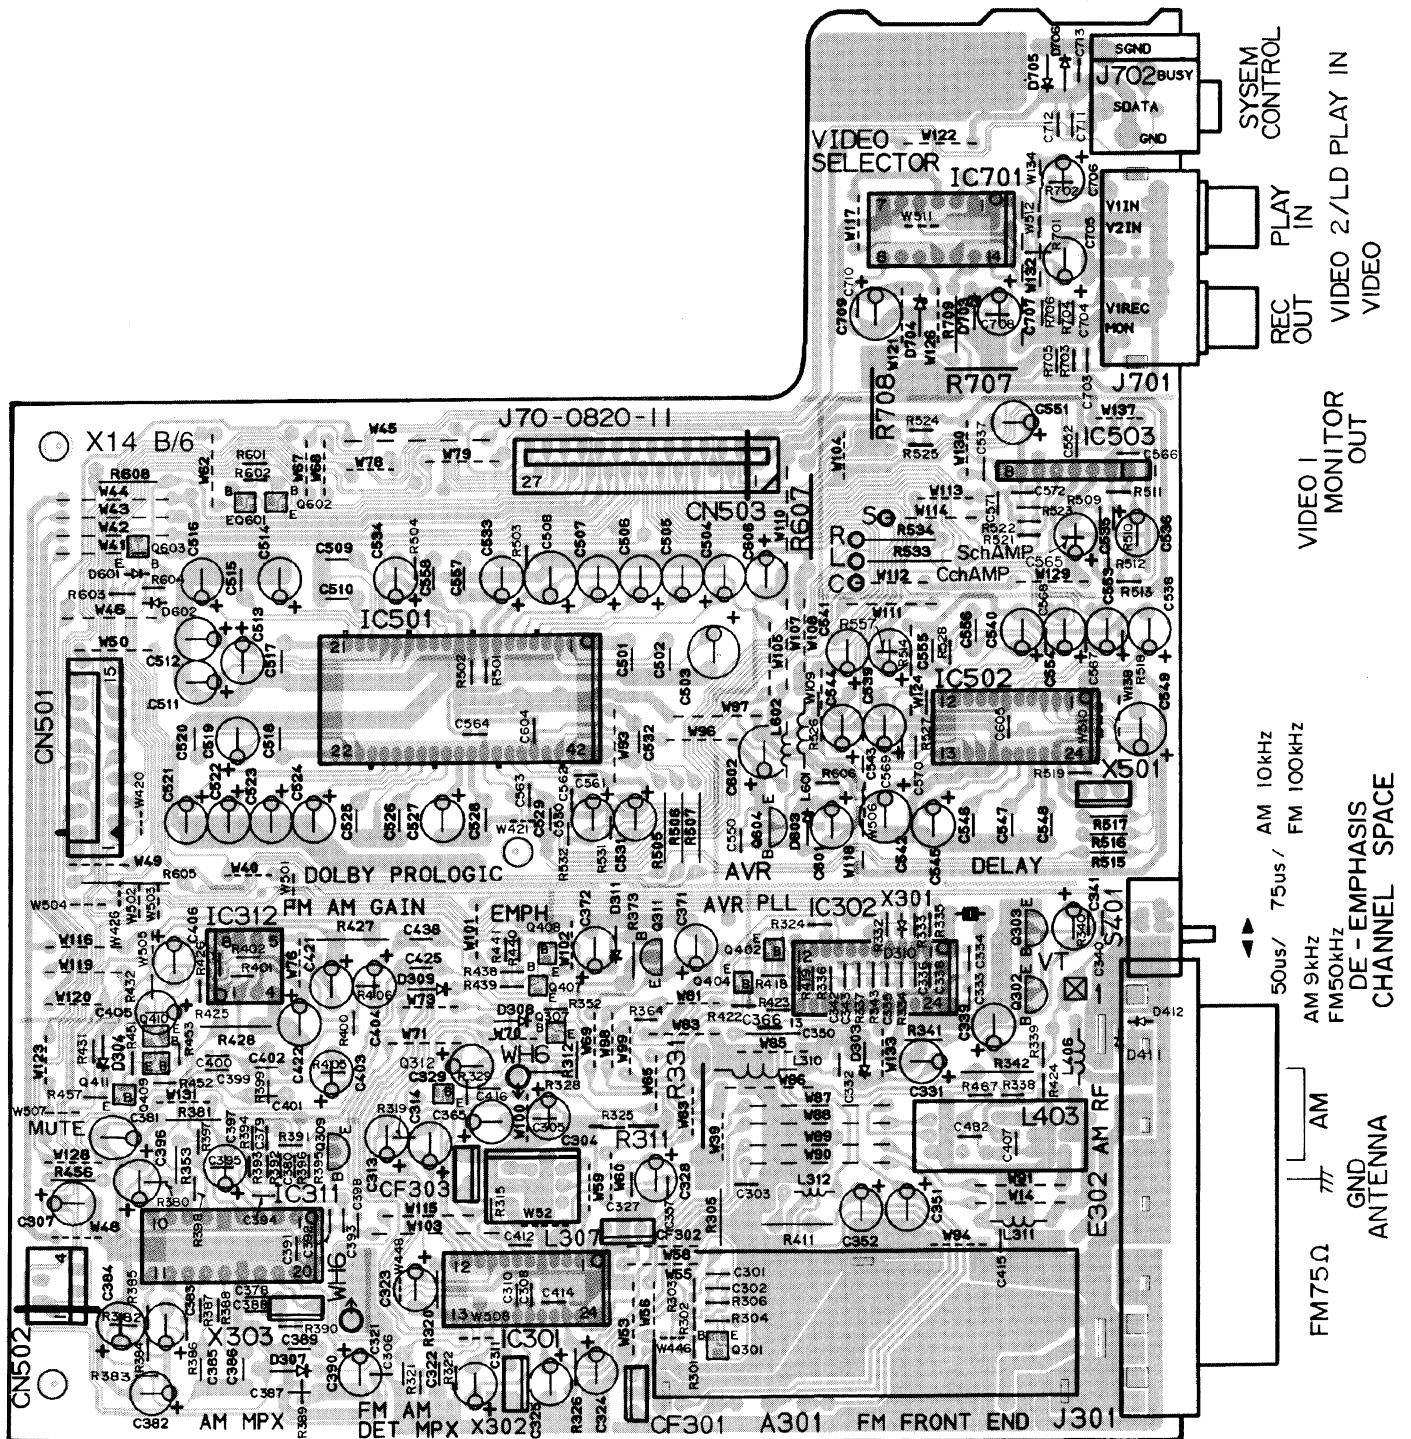




# PC BOARD (Component side view)

DISPLAY unit (X14-41xx-xx)

20-10 : KR-V7080 K,P  
32-70 : KR-V7080 T,E

20-21 : KR-V7080 Y,M,C  
20-11 : KR-V8080 K,P

20-71 : KR-V7080 X

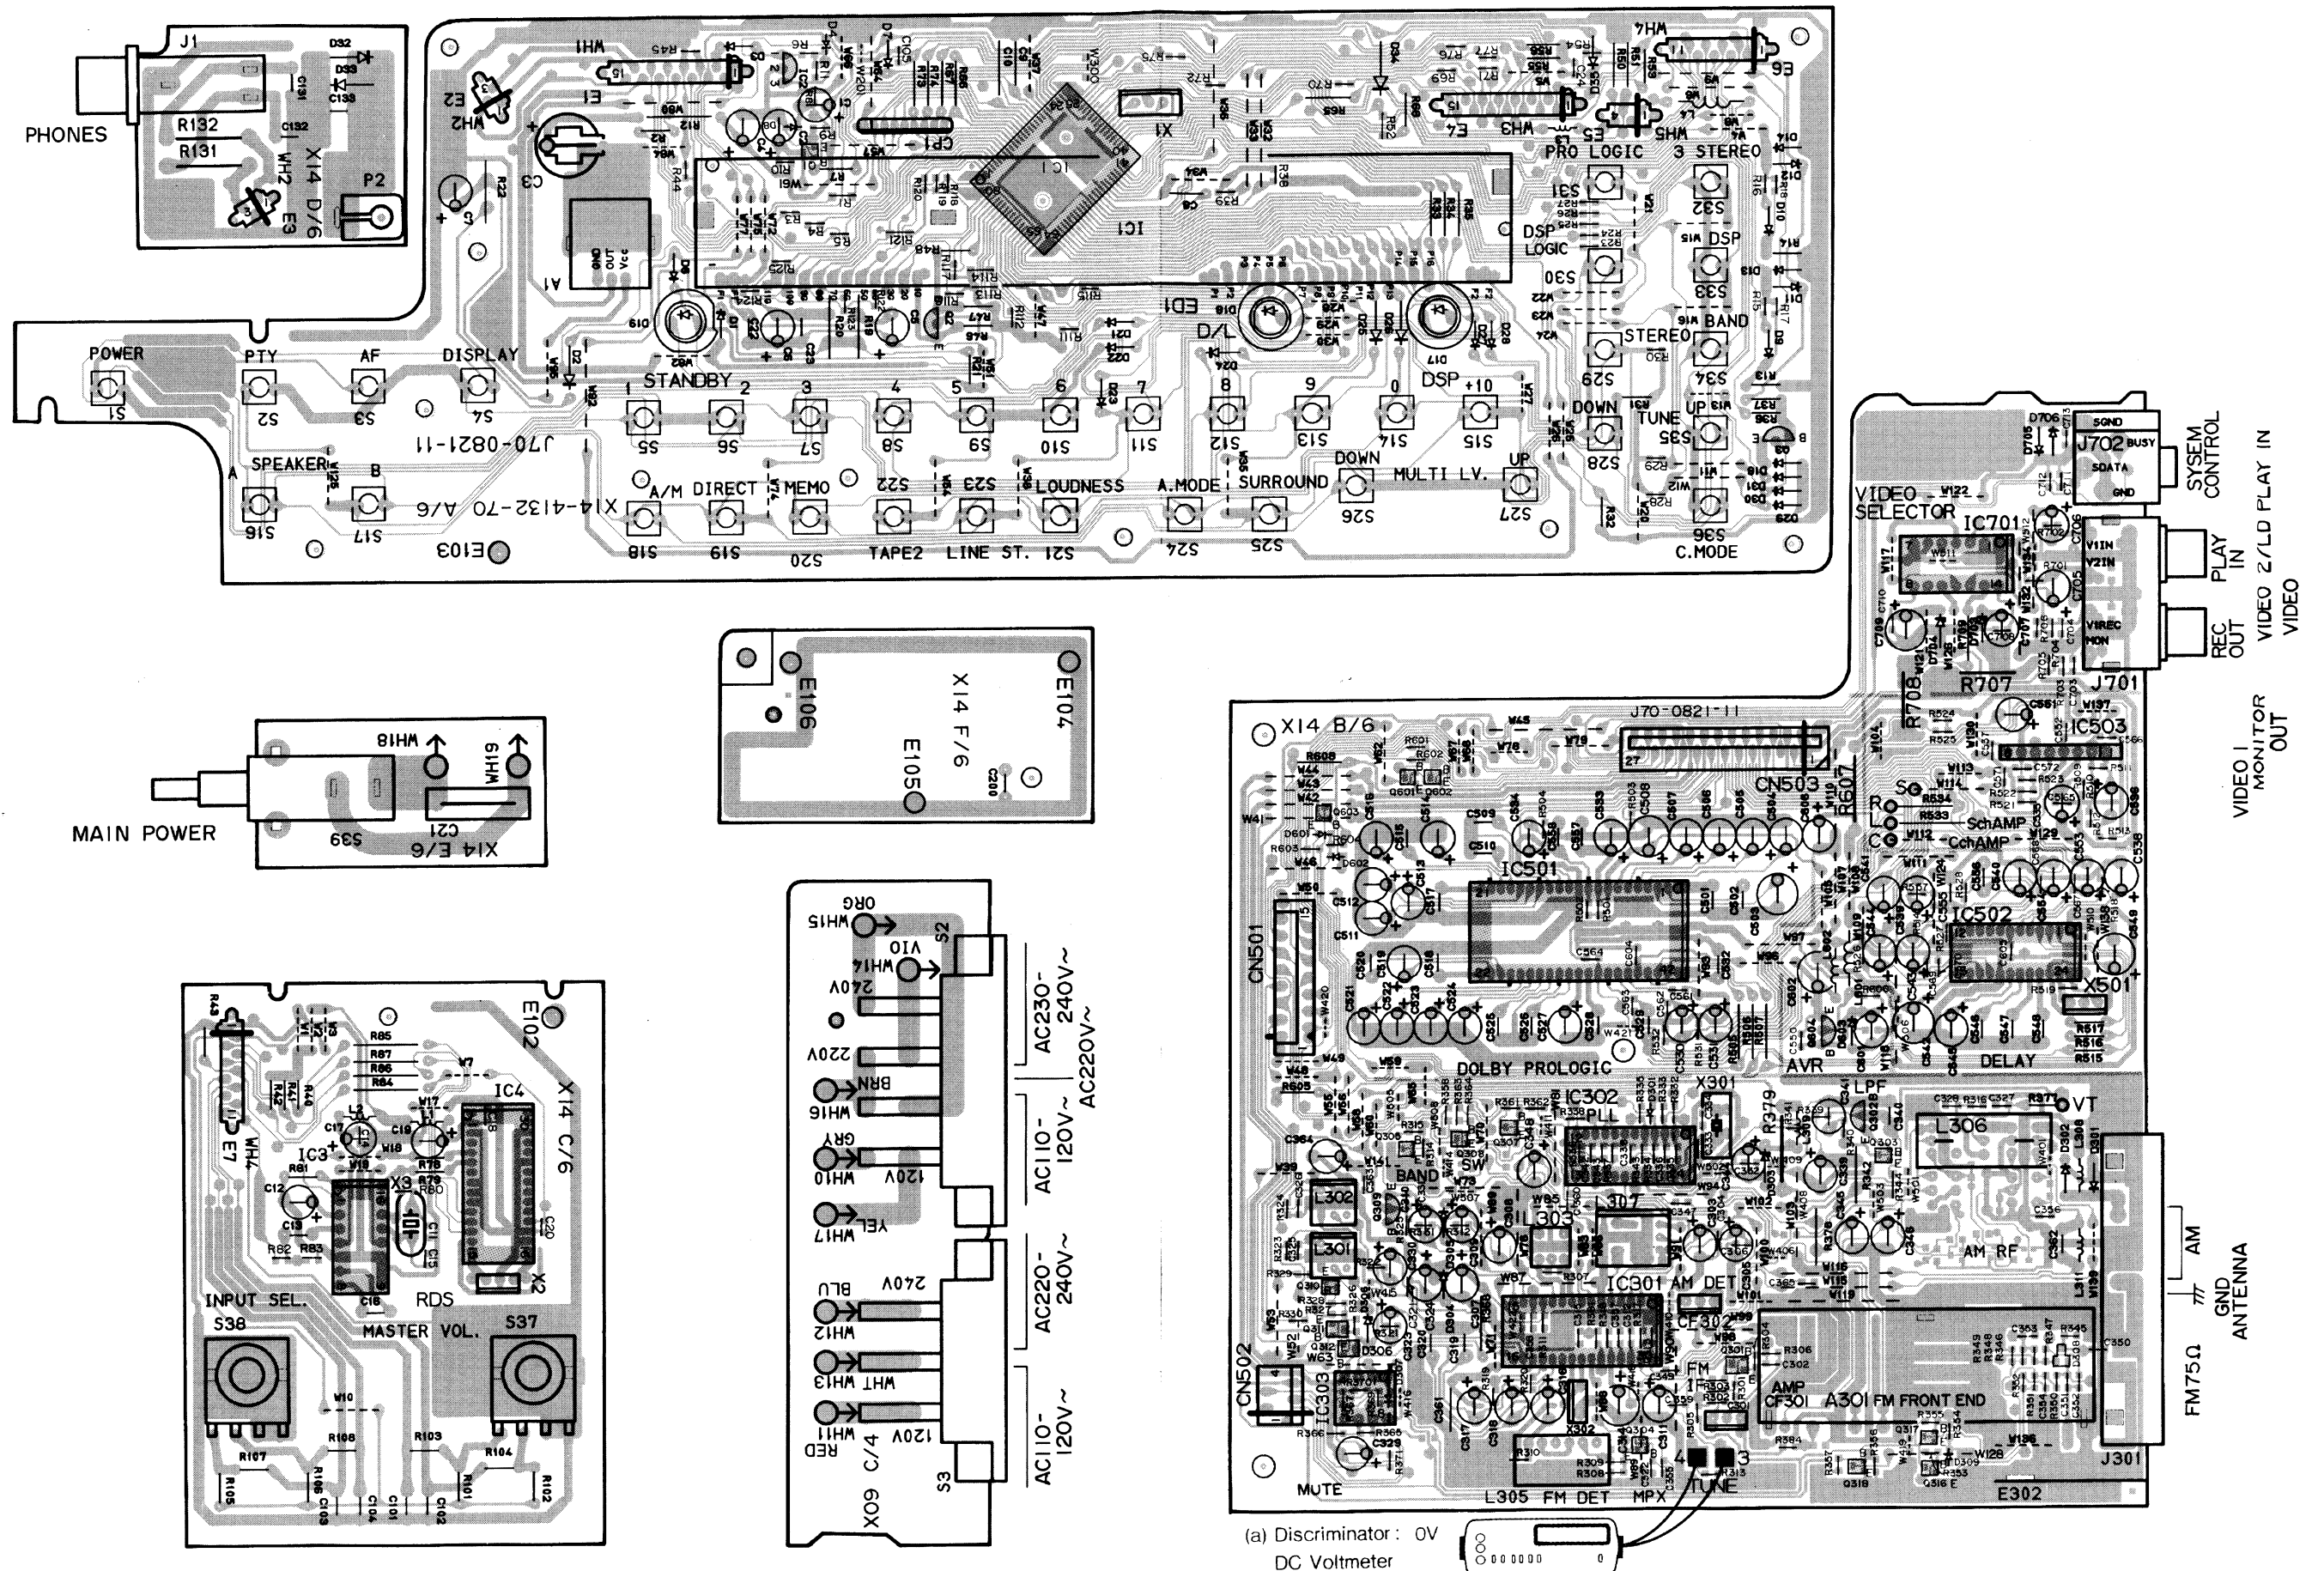

(a) Discriminator : 0V  
DC Voltmeter




# PC BOARD (Component side view)

AUDIO unit (X09-434x-xx) 0-10 : KR-V7080 K,P  
2-71 : KR-V7080 E

0-21 : KR-V7080 M  
2-91 : KR-V7080 Y

0-51 : KR-V7080 T  
3-01 : KR-V7080 C


0-71 : KR-V7080 X  
0-11 : KR-V8080 K,P

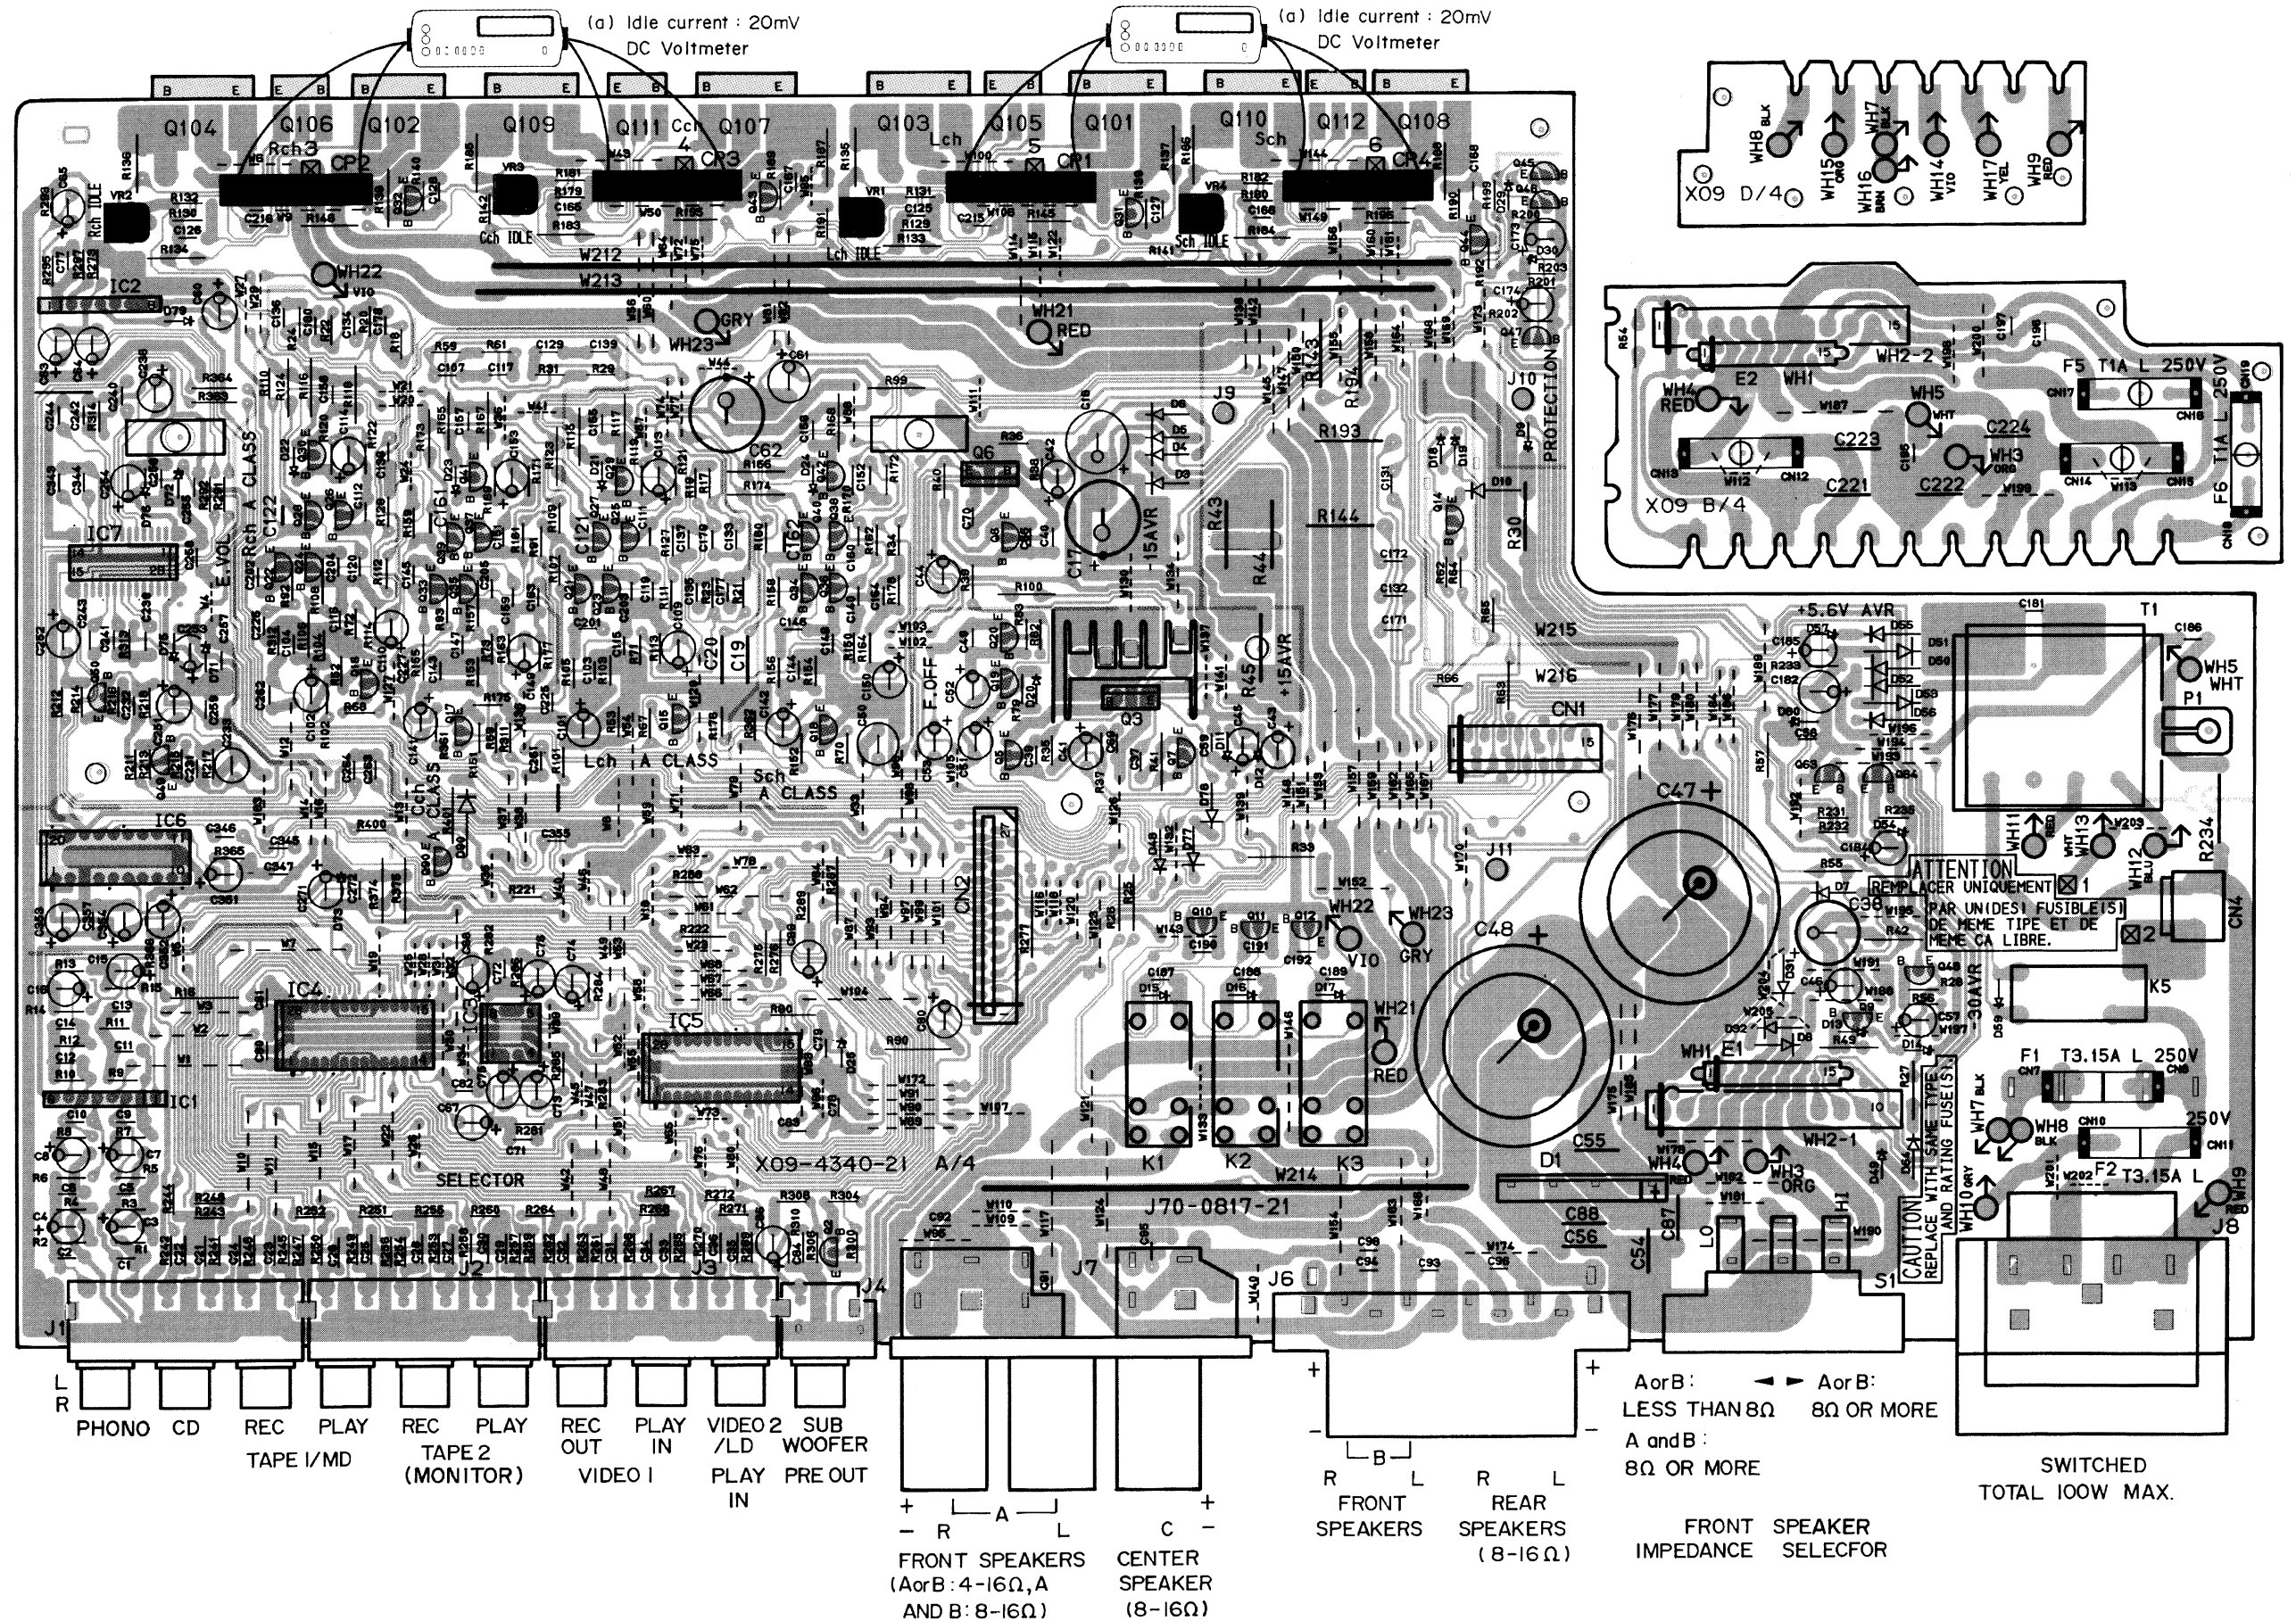













**CAUTION:** For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). **A** indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter as the AM/FM signal generator is specified to the conditions as shown in the list below. The measurement value may vary depending on the measuring instruments used or on the product. The value shown in ( ) is actual reading measured in the AM mode.

MODE	CARRIER	MODULATION		ANT INPUT
		FREQUENCY	DEVIATION	
FM	98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
AM	1000(999)kHz	400Hz	MONO 30% MOD	60dB










2SA1123  
2SA1534A  
2SA992  
2SC1845  
2SC2003  
2SC2631

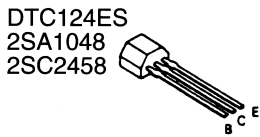





IC301 : LA1831A-KEN  
IC302 : LC7218  
IC312 : NJM4565D

Q301 : 2SC 2714(R, O)  
Q302 : 2SC 1845(F, E)  
Q303 : 2SC 2458(Y, GR) or  
2SC 3311A(Q, R)  
Q307, 407, 408 : 2SC4081(R, S) or  
2SC 4116(Y, GR)  
Q311 : 2SC3940A(R, S) or  
2SD863(E, F)  
Q402, 404, 411 : 2SA 1576A(R, S) or  
2SA 1586(Y, GR)  
Q409, 410 : 2SD 1757K

D303 : RD5. 1ES(B2) or  
HZS5. 1N(B2)  
D304 : RD3. 3ES(B2) or  
HZS3. 3N(B2)  
D307, 308 : 1SS133 or  
HSS104  
D310, 411, 412 : MA111  
D311 : RD8. 2ES(B2) or  
HZS8. 2N(B2)





MODEL NAME	DESTINATION		UNIT NO	C321, C322,	R438~R441, C425, C438 Q407, Q408, S401, W101, W503
	COUNTRY	ABB.			
KR-V7080	U. S. A. CANADA	K P	20-10	0.024	NO
	AUSTRALIA	X	20-71	0.016	
	PX	Y	20-21		
	GENERAL MARKET CHINA	M C			
KR-V8080	U. S. A. CANADA	K P	20-11	0.024	NO



— SIGNAL LINE  
— GND LINE  
— +B LINE  
— -B LINE

X14-4132-70 (E.T. TYPE) (TUNER UNIT) KR-V7080 ONLY

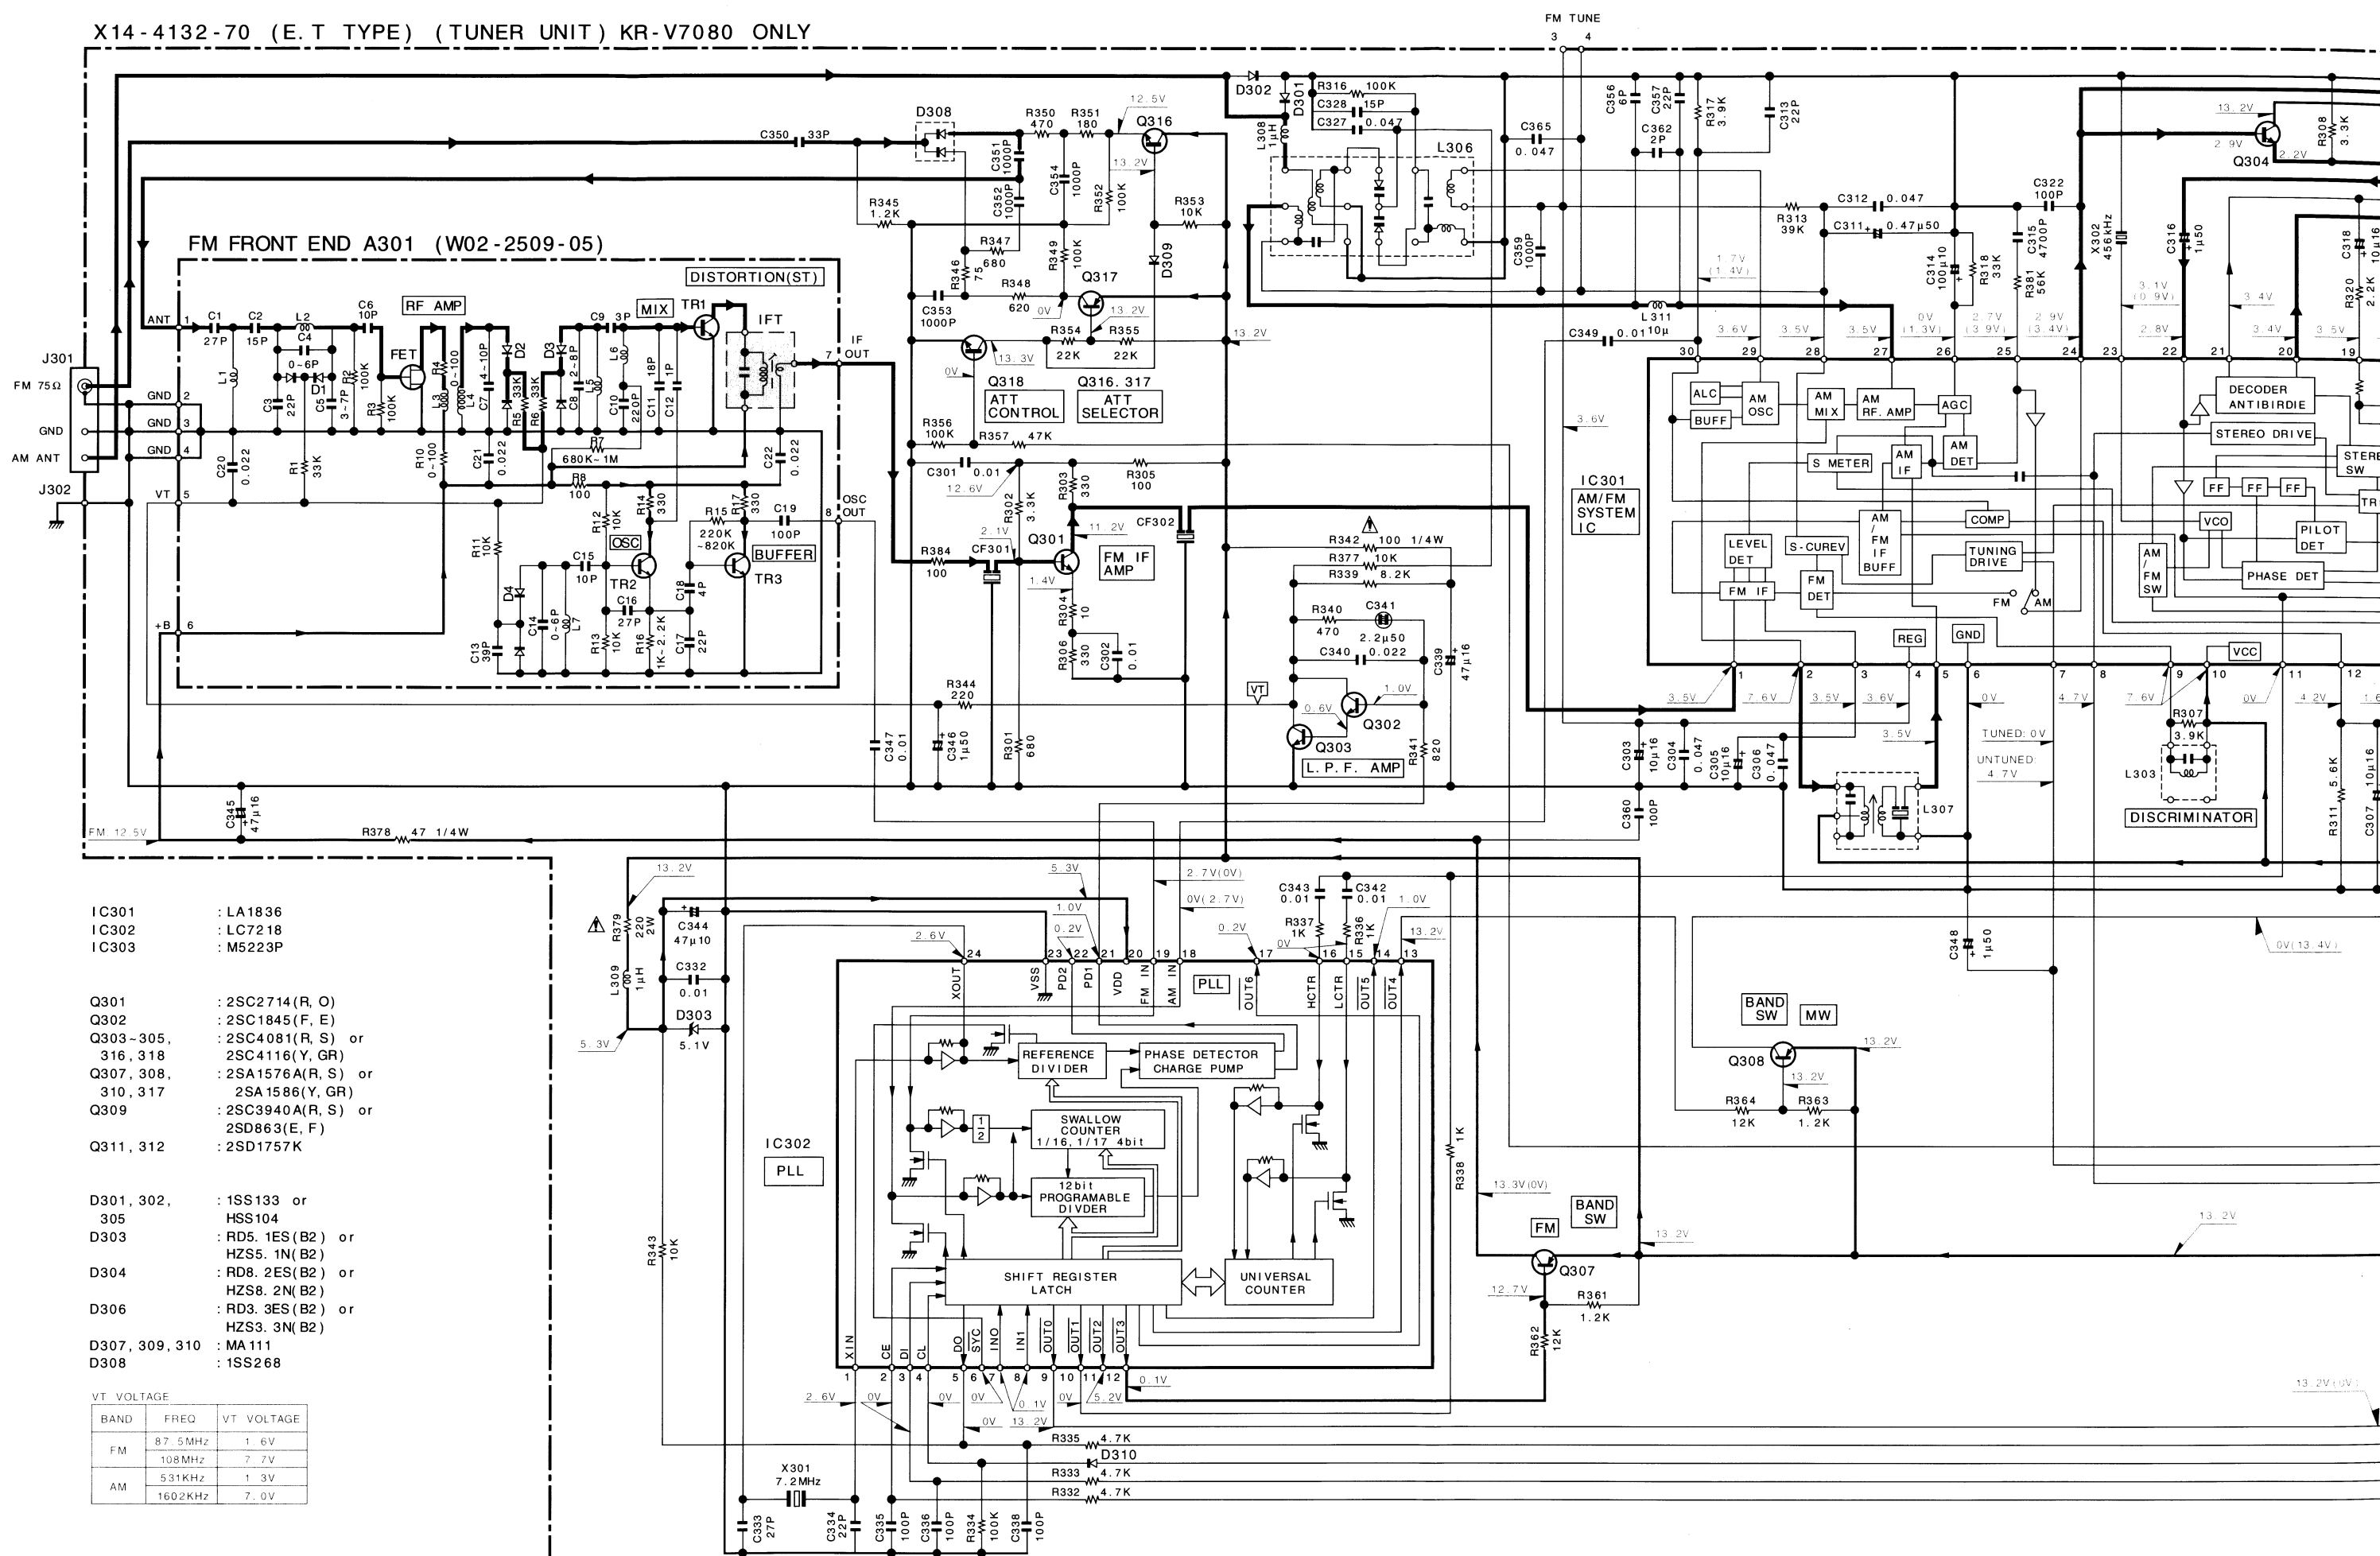


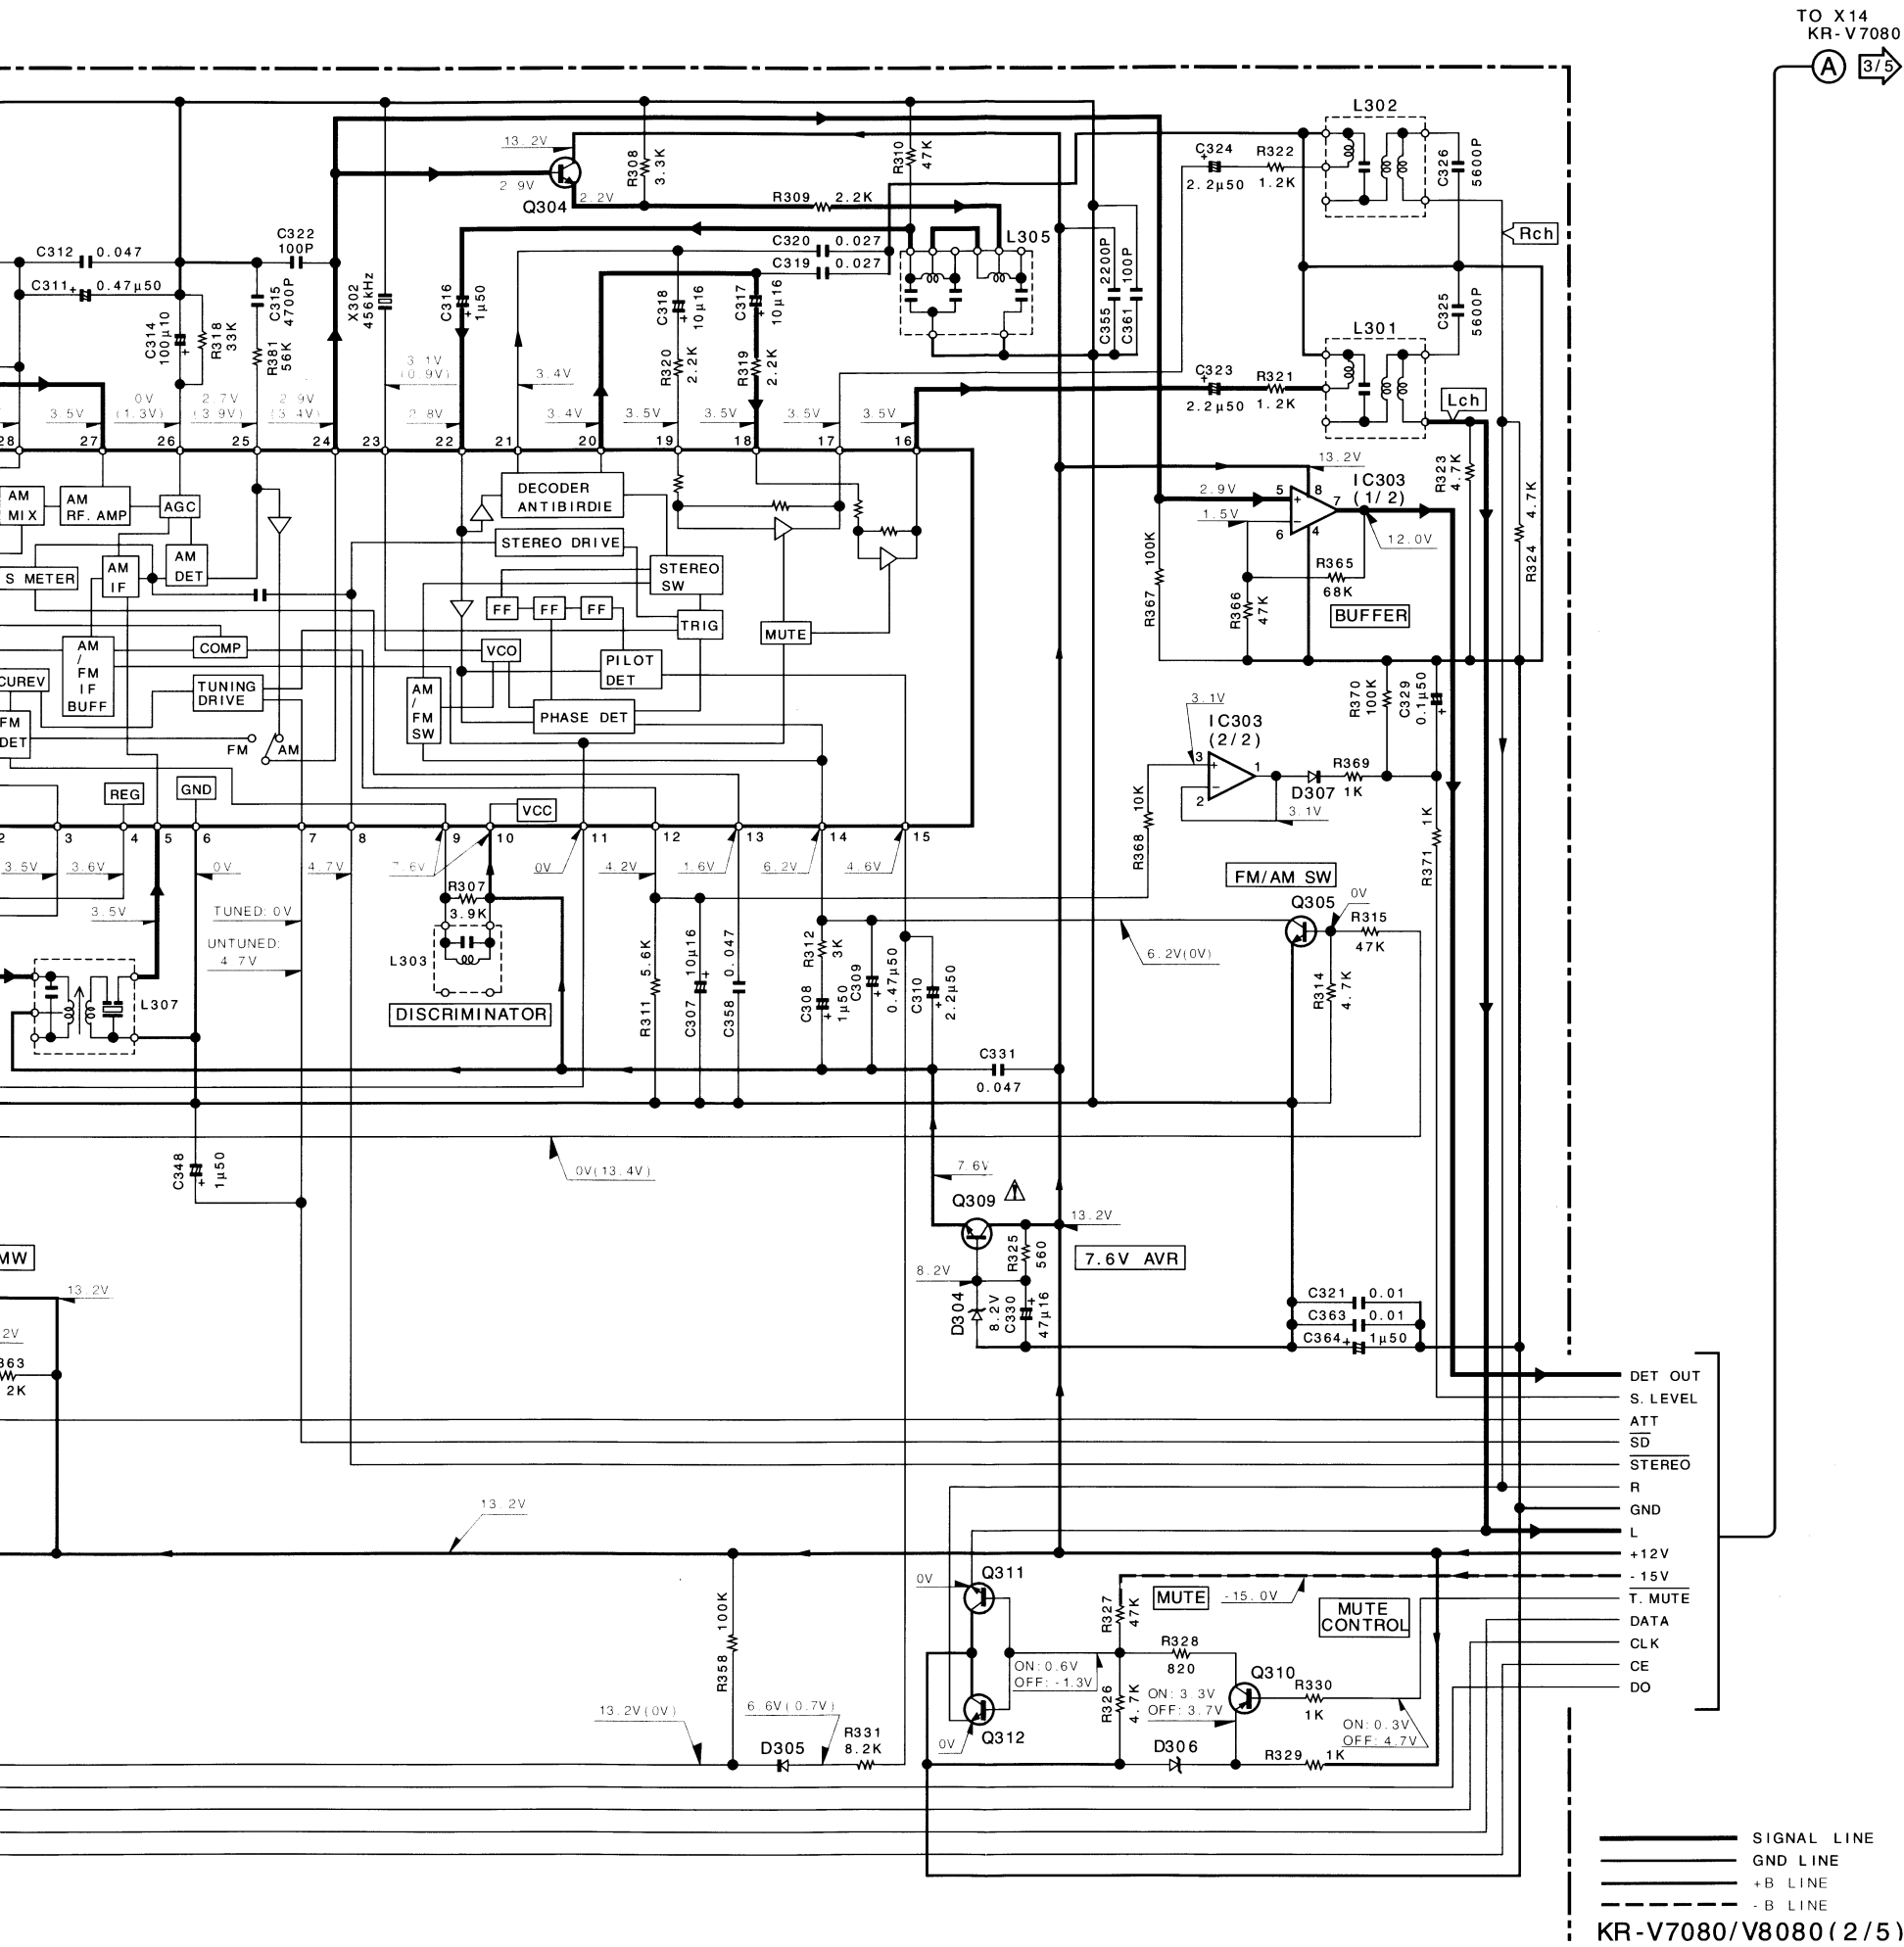


**CAUTION:** For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).  $\Delta$  indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter as the AM/FM signal generator is specified to the conditions as shown in the list below. The measurement value may vary depending on the measuring instruments used or on the product. The value shown in ( ) is actual reading measured in the AM mode.

MODE	CARRIER	MODULATION		ANT INPUT
		FREQUENCY	DEVIATION	
FM	98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
AM	1000(999)kHz	400Hz	MONO 30% MOD	60dB

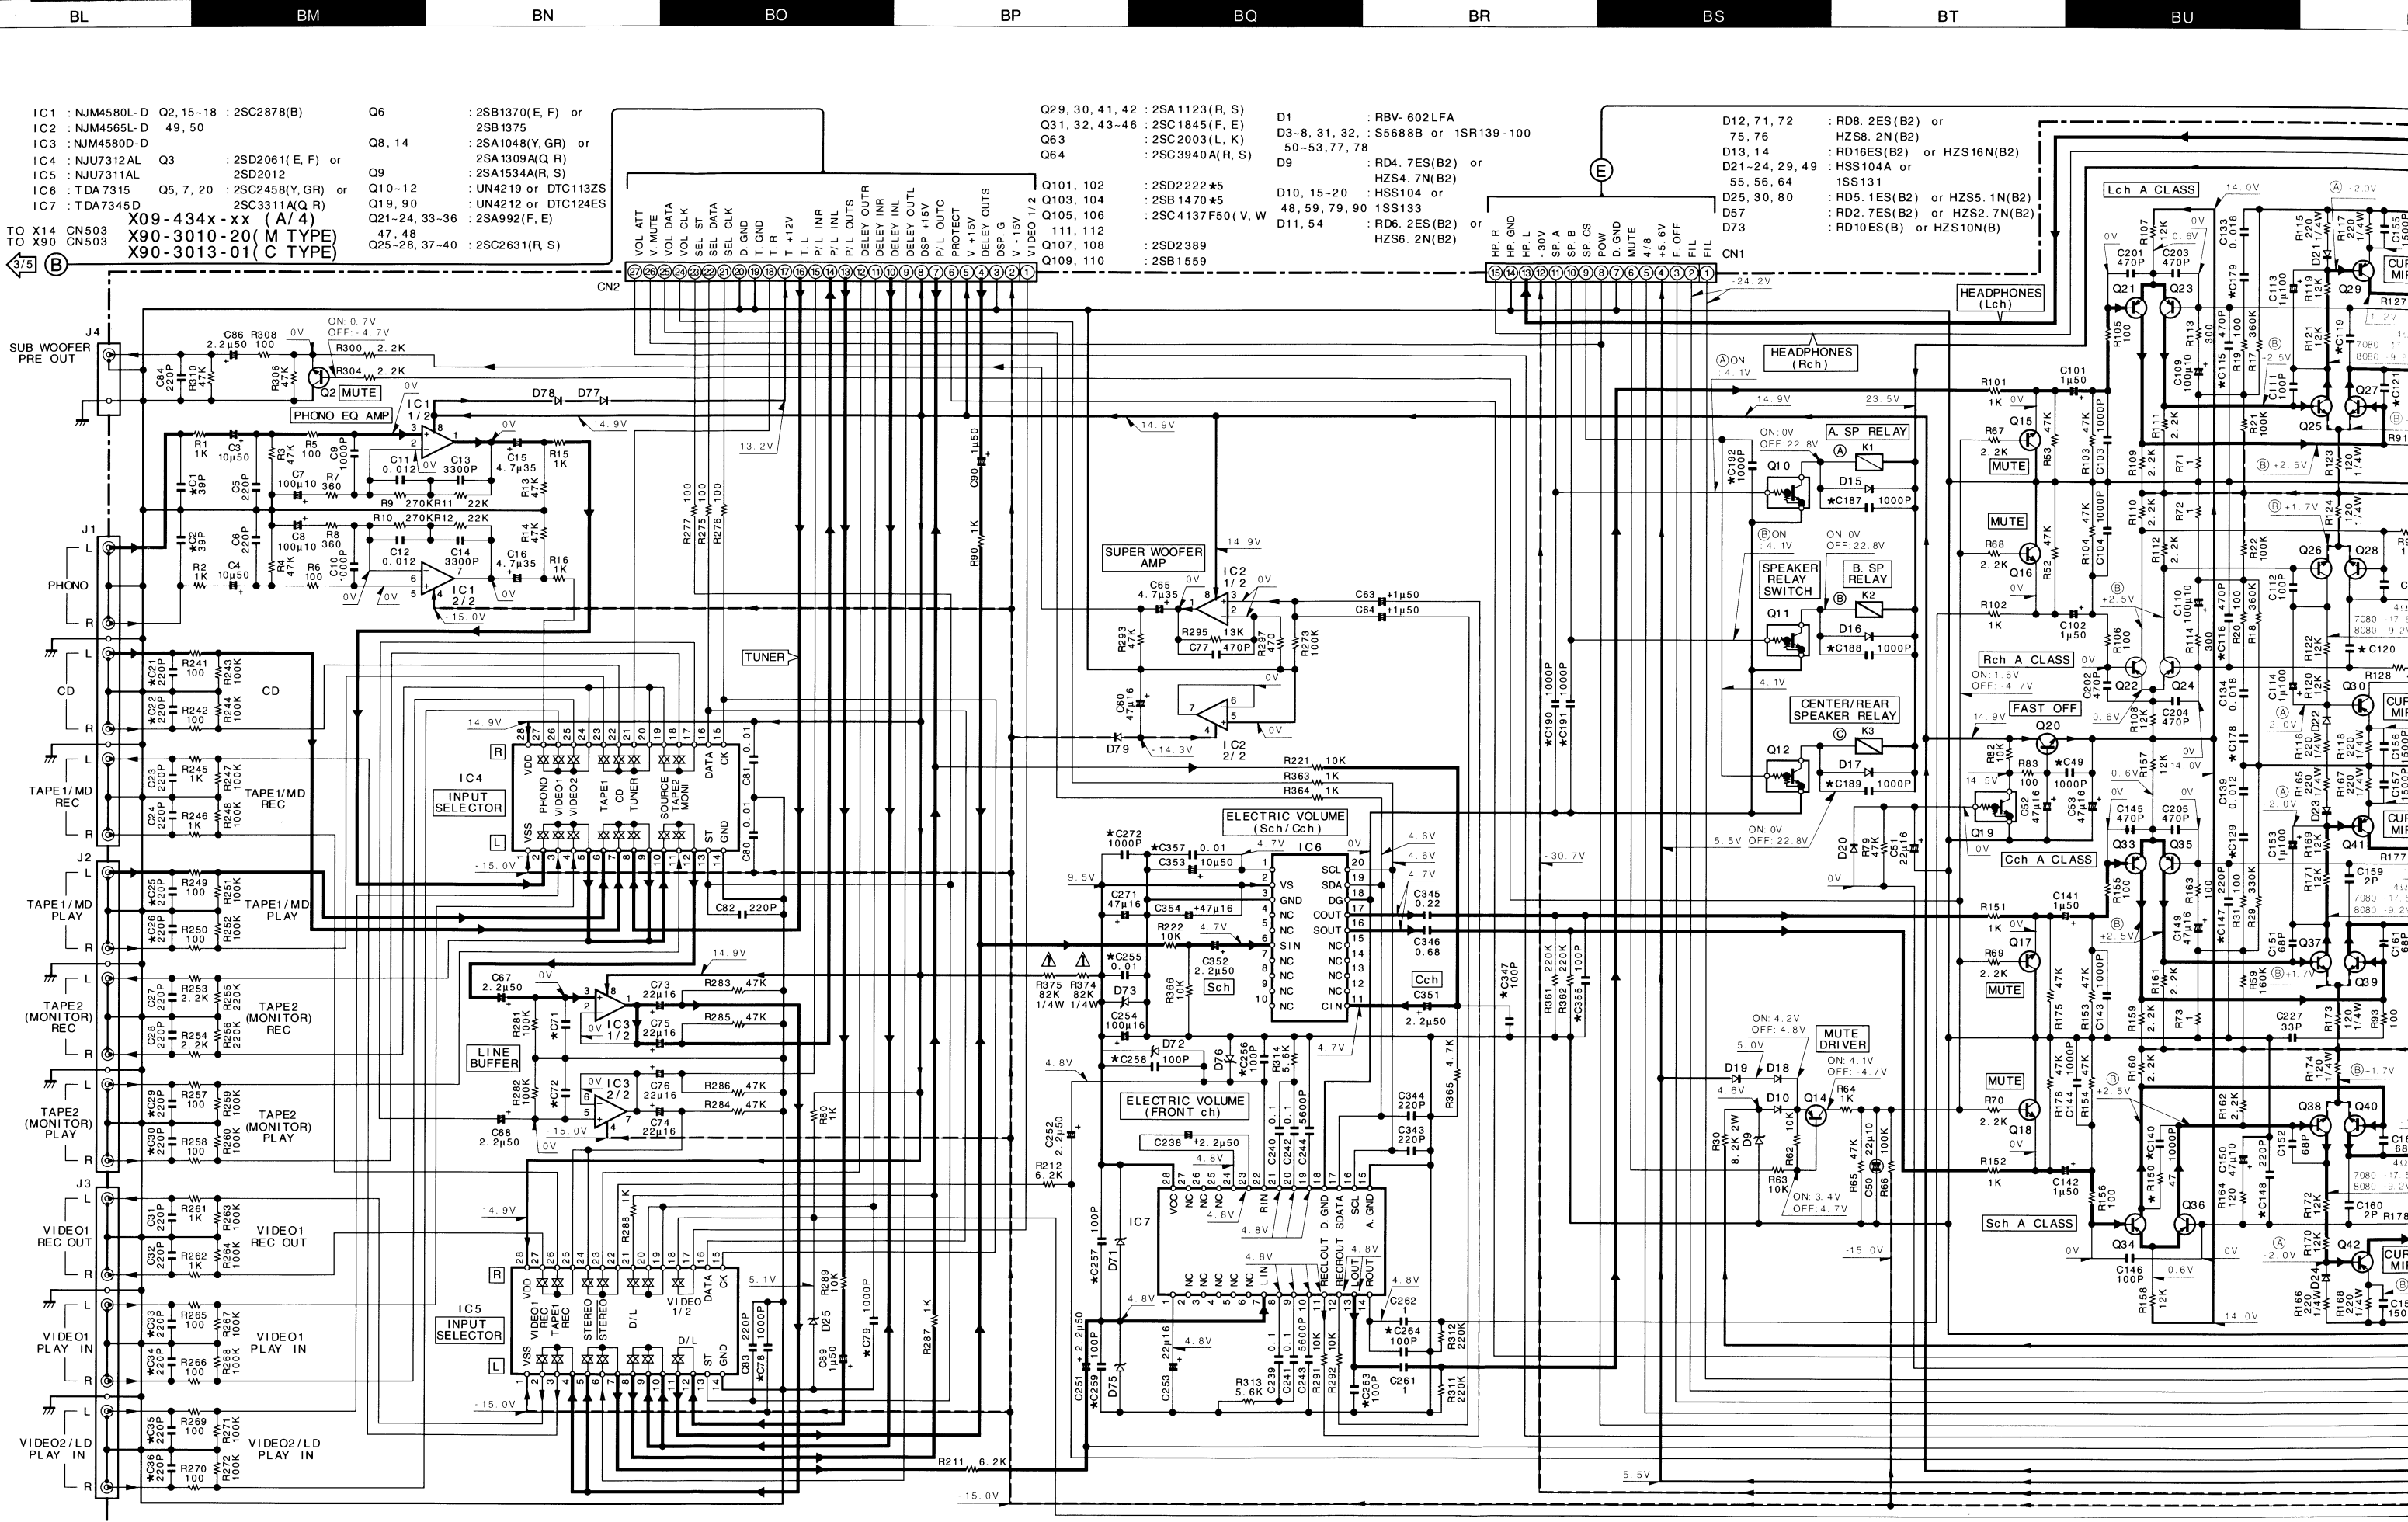

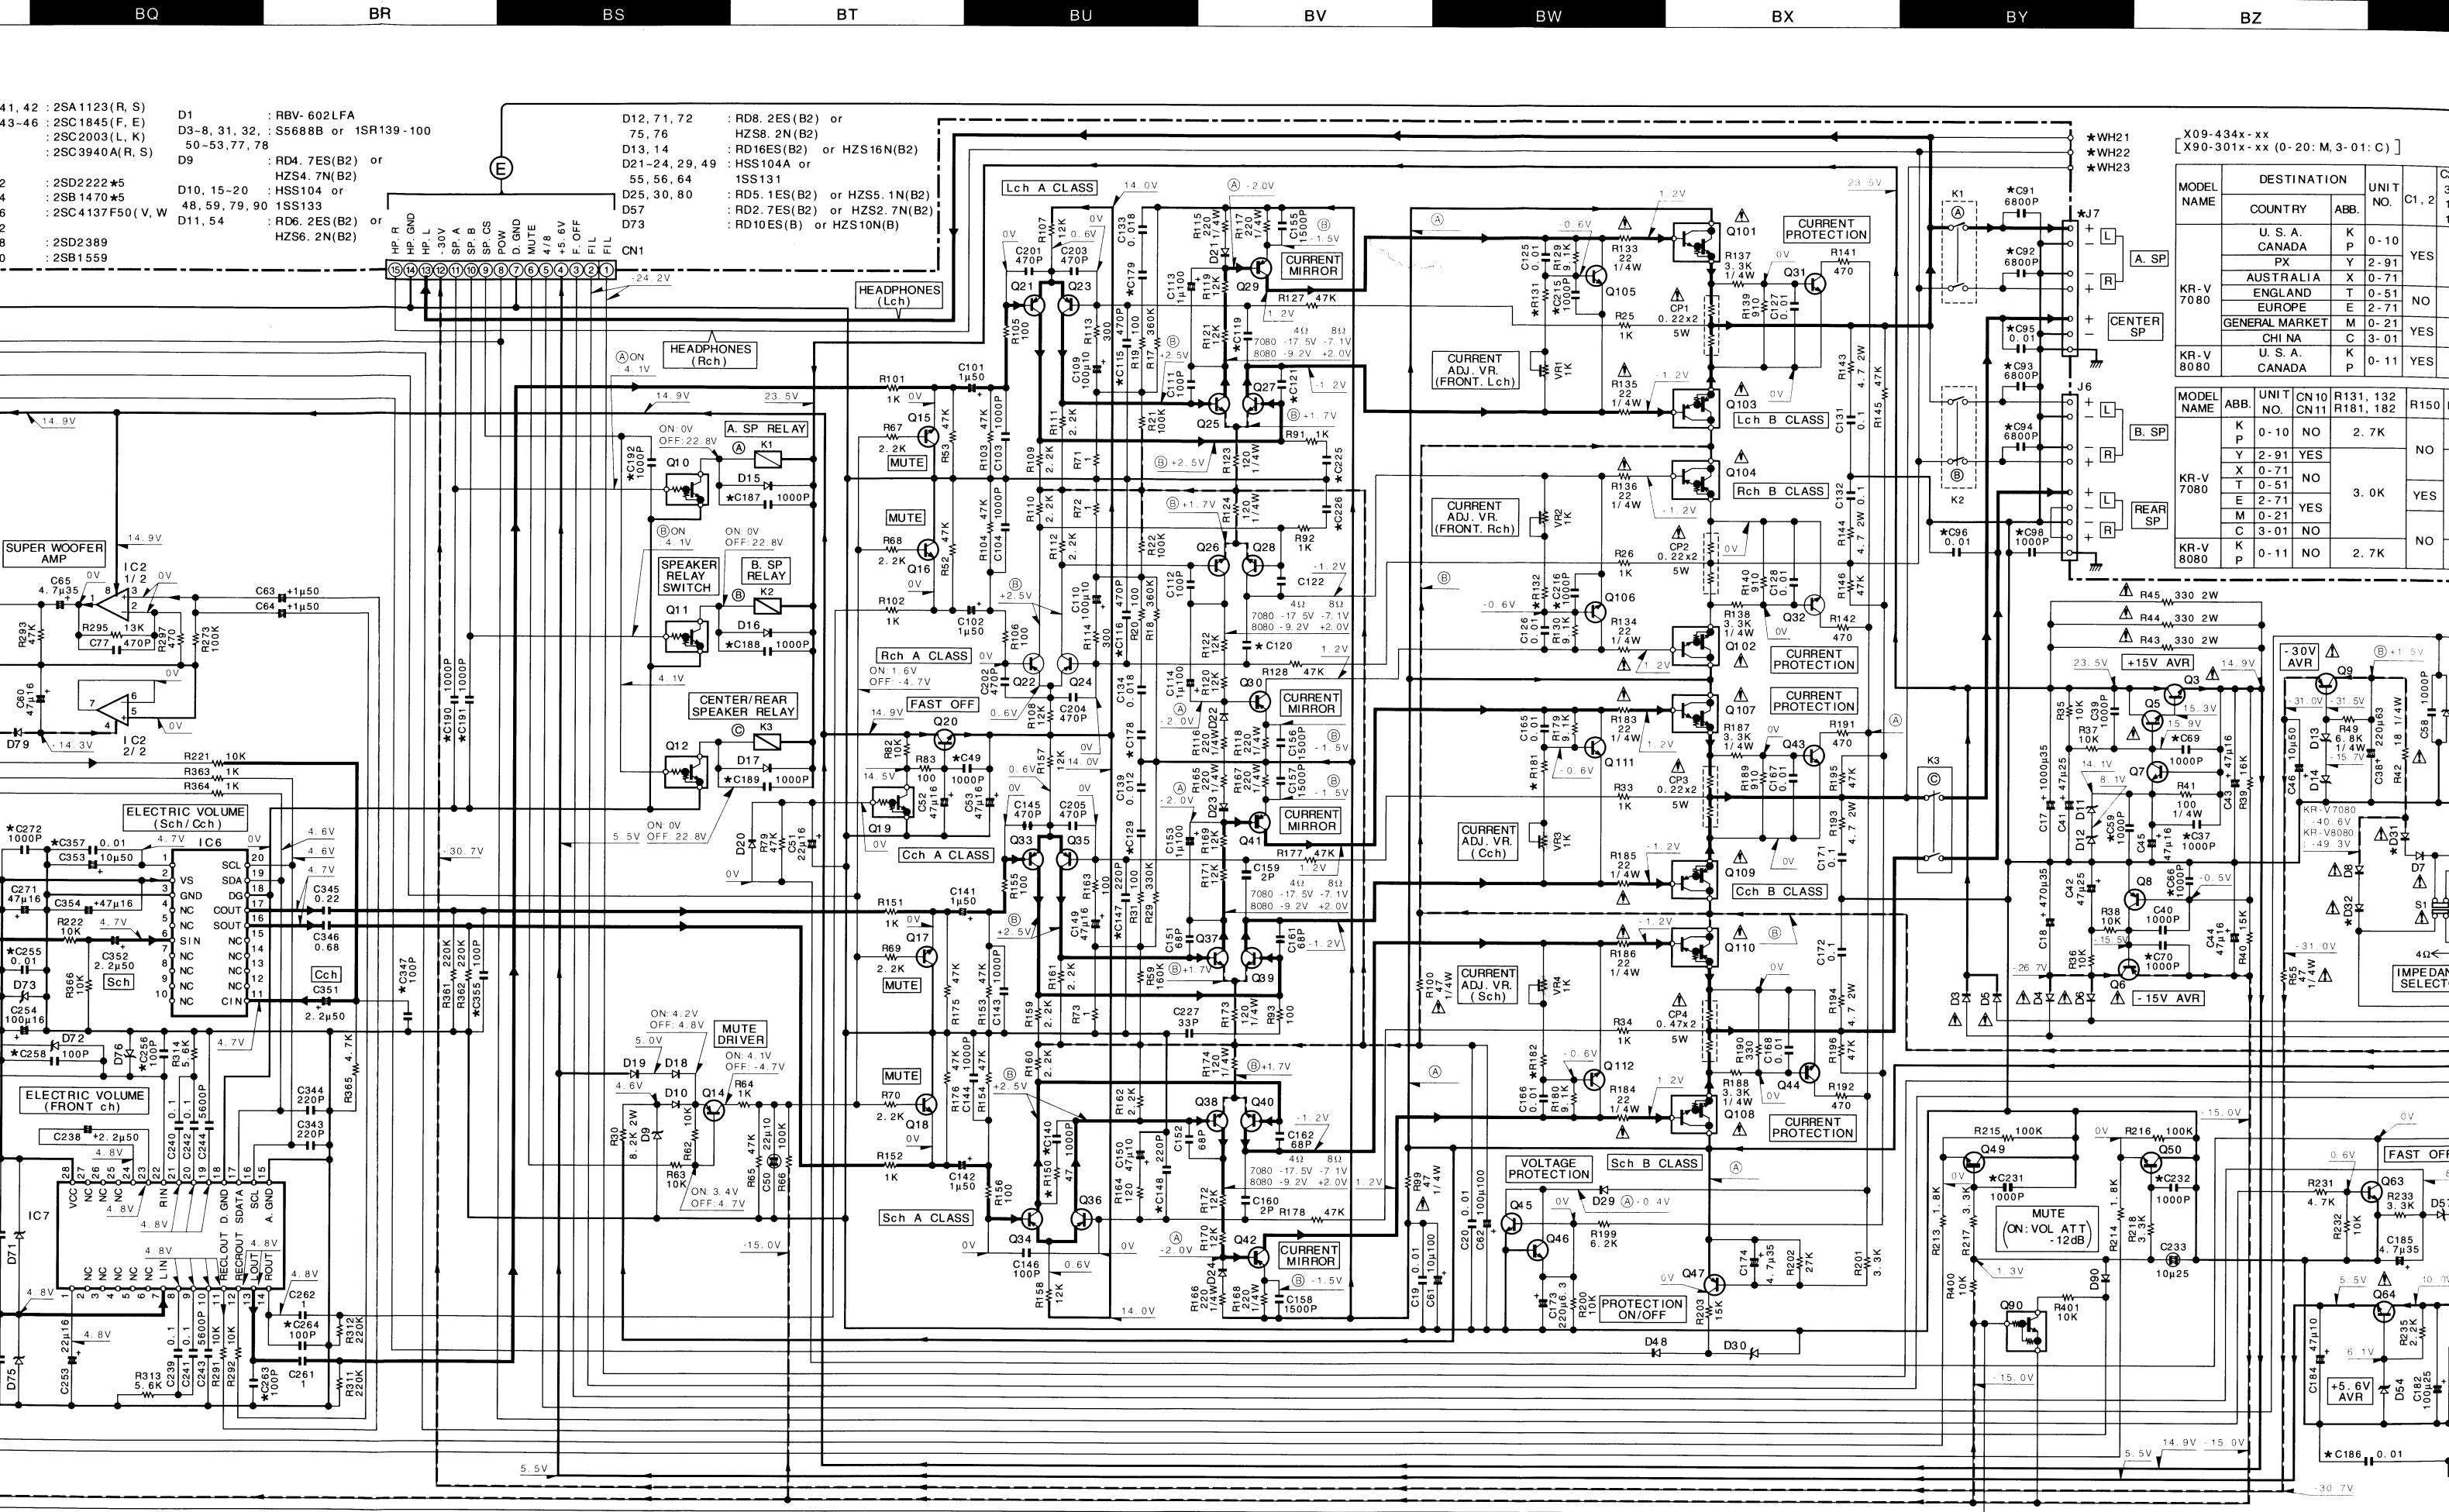









SI 16

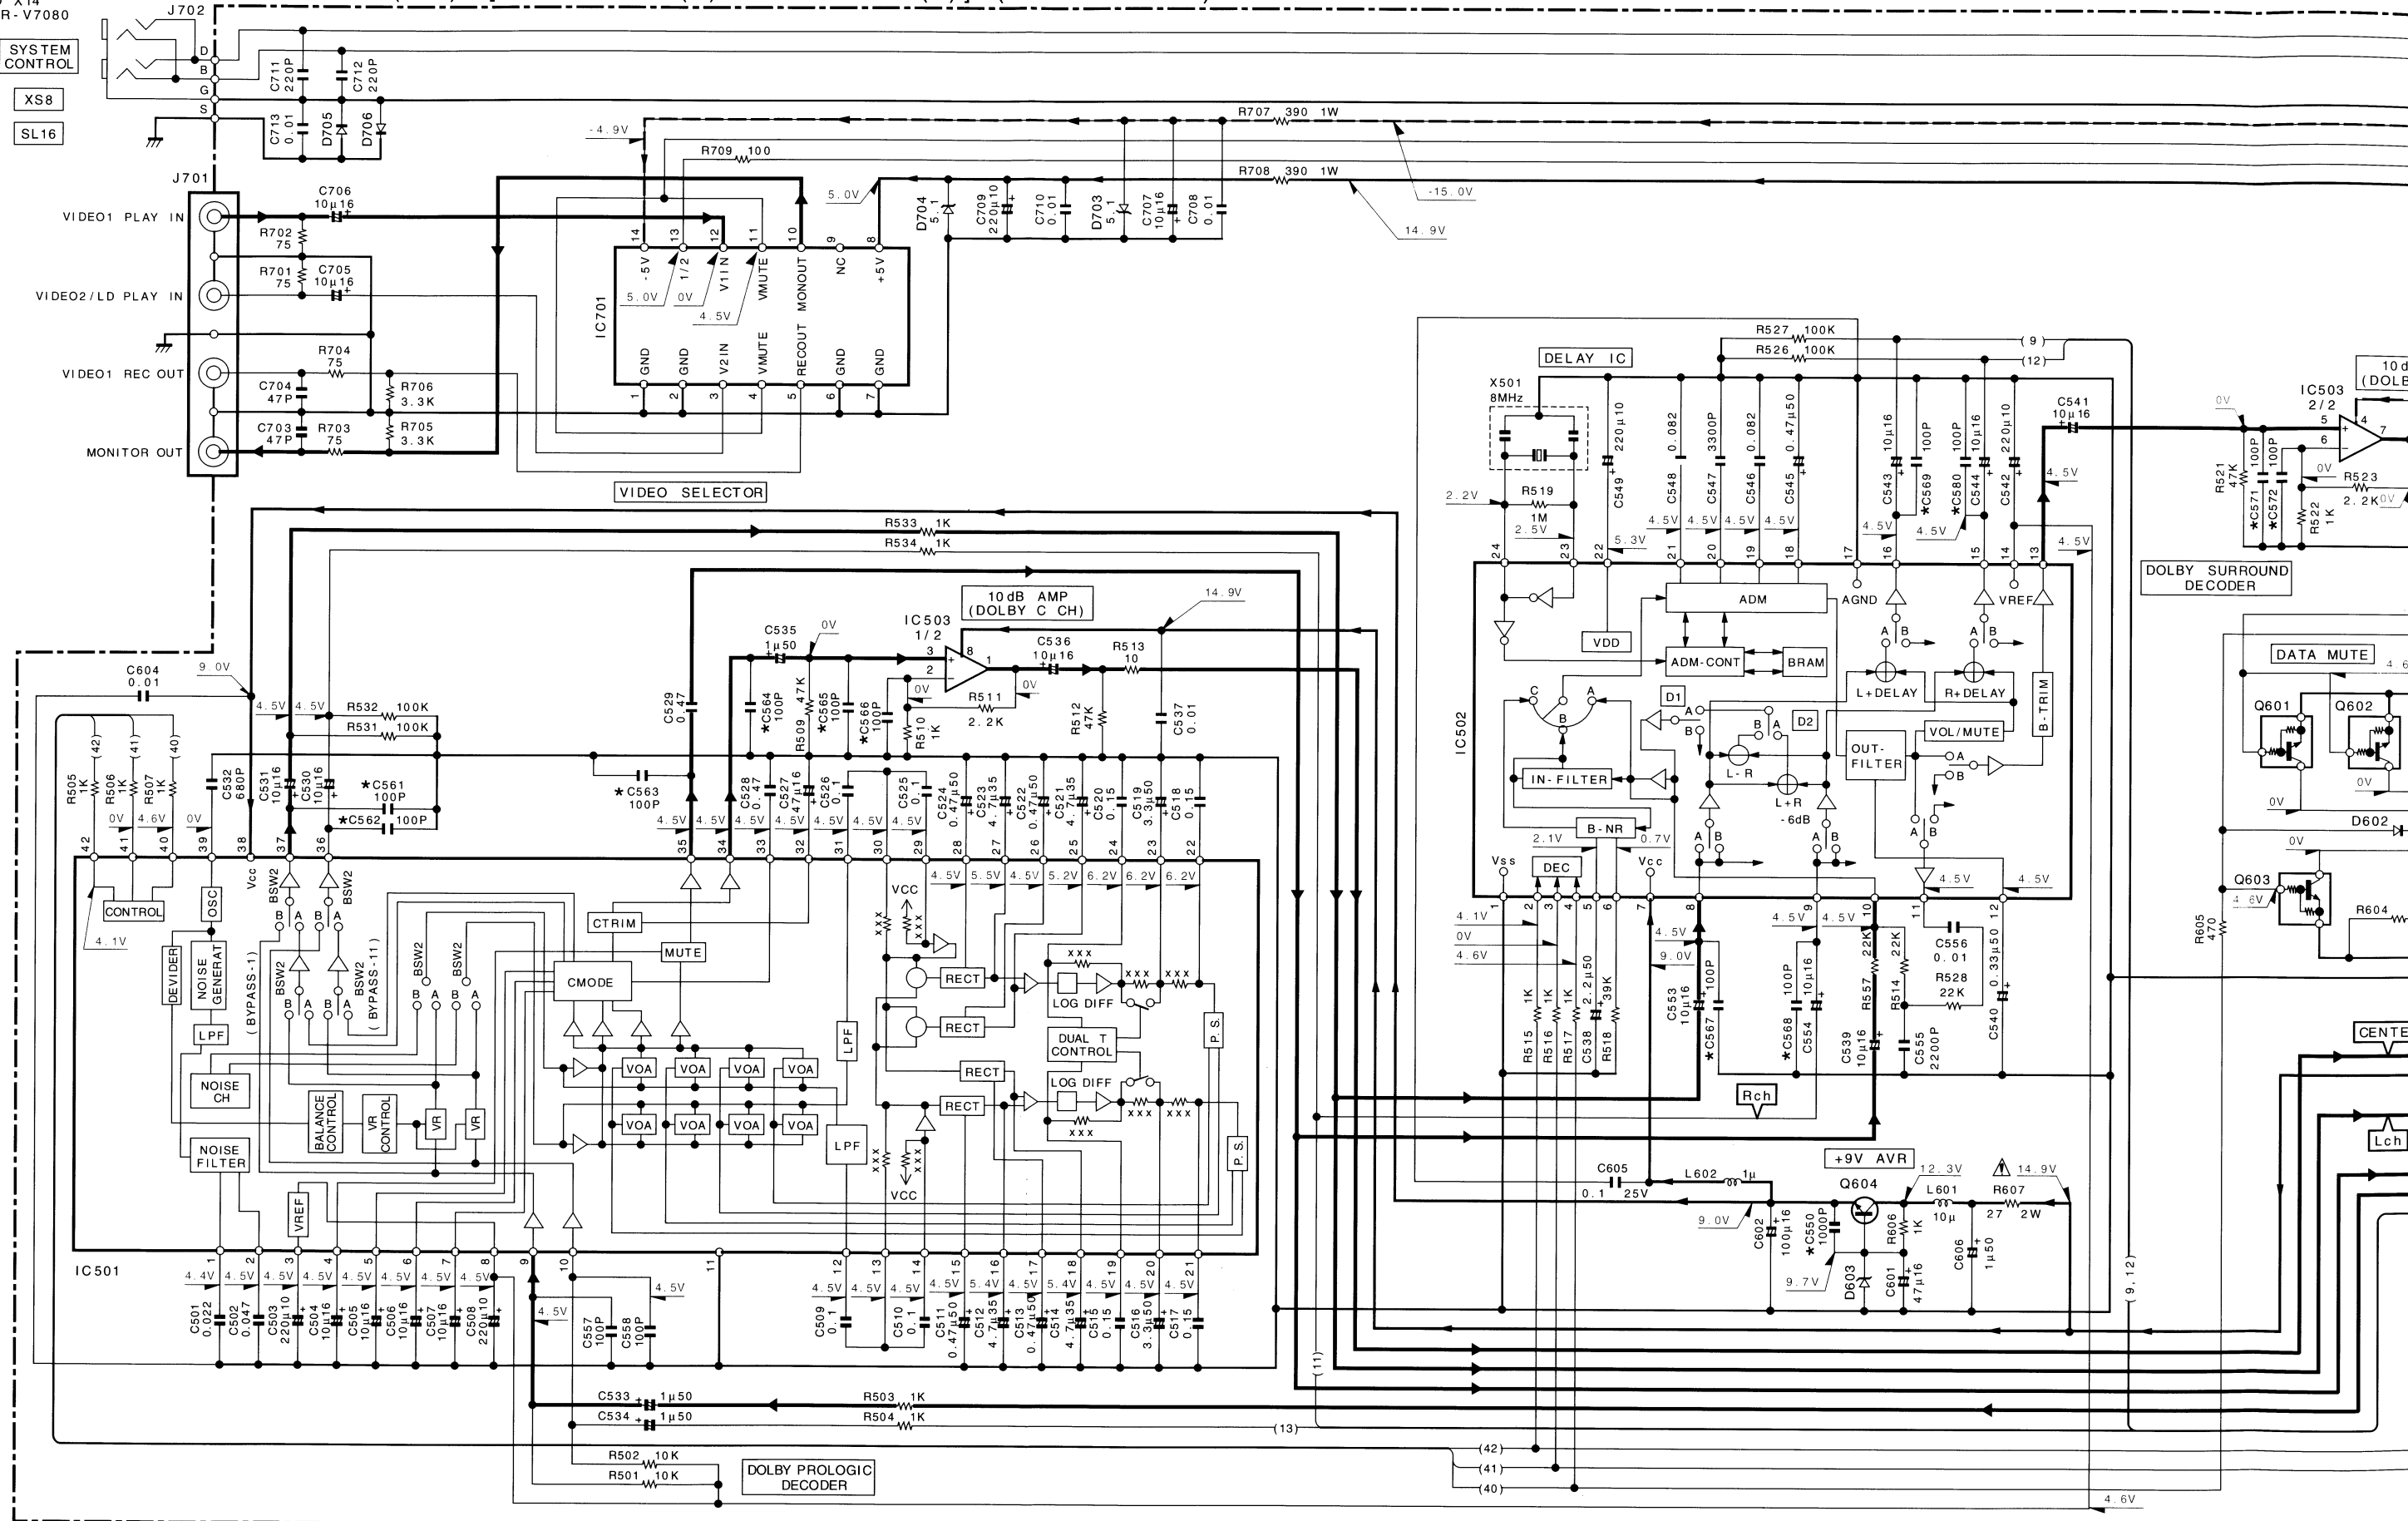

ND UNIT)


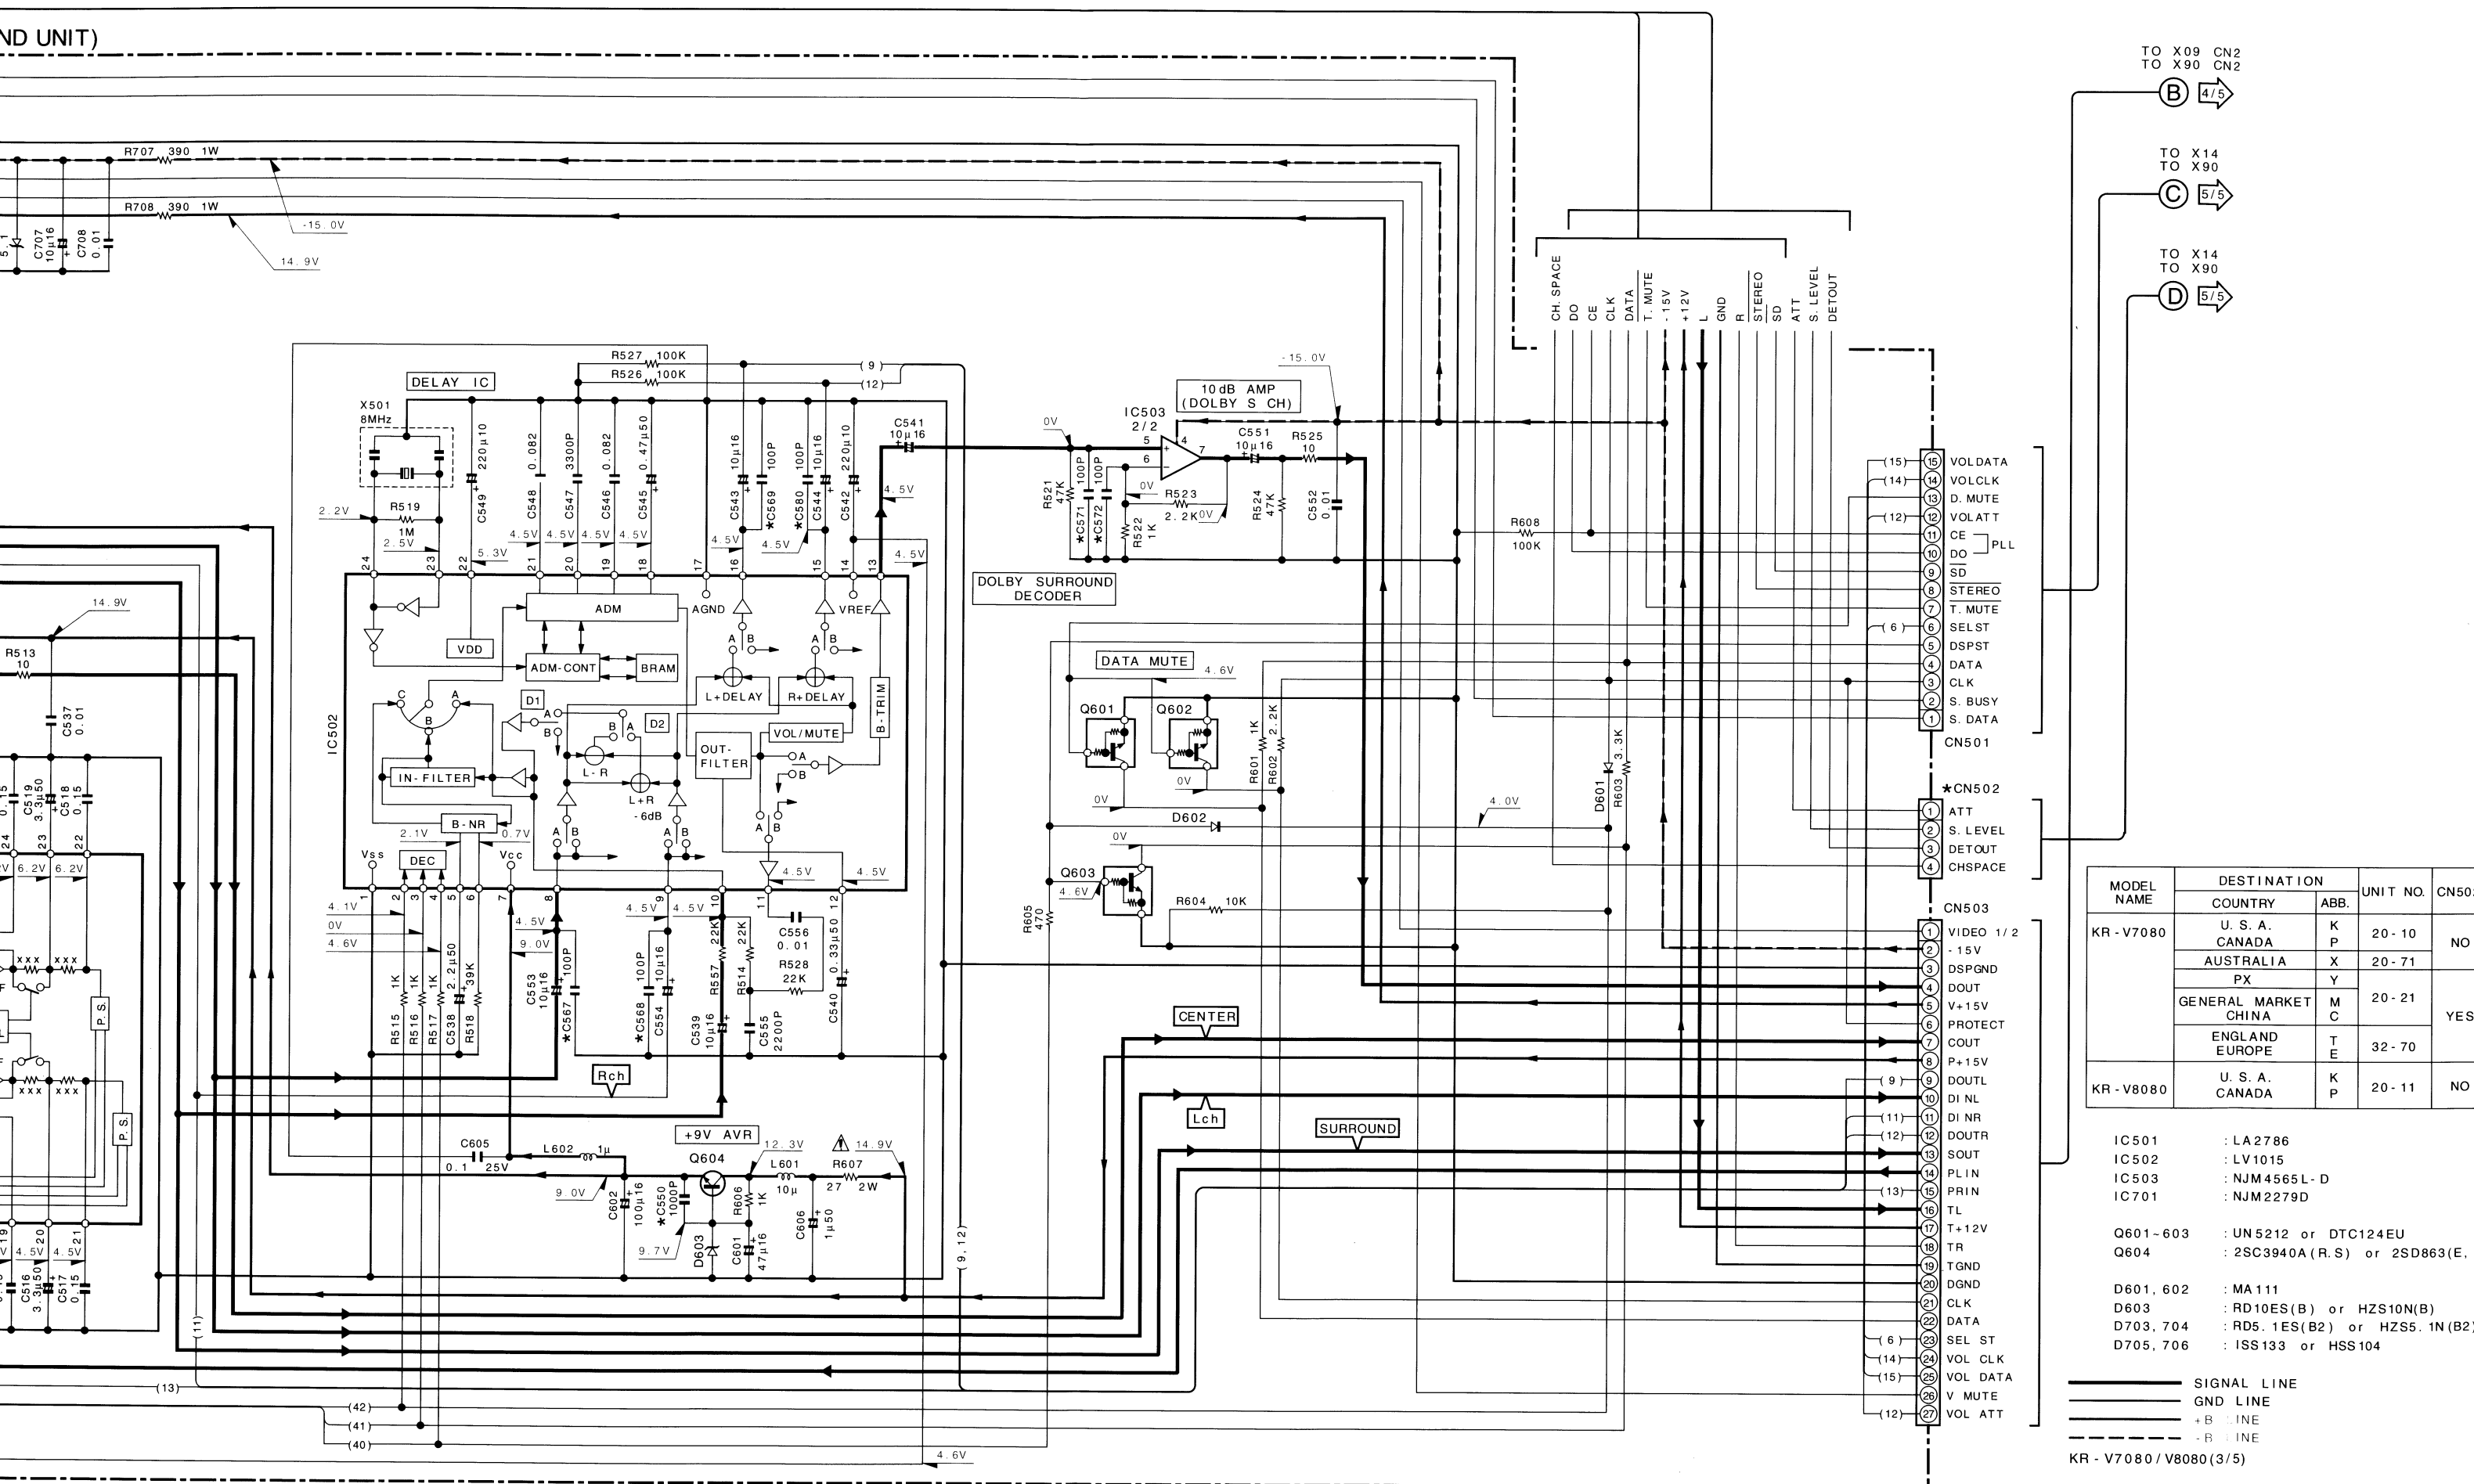


MODEL NAME	DESTINATION		UNIT NO.	CN50
	COUNTRY	ABB.		
KR - V7080	U. S. A.	K	20 - 10	NO
	CANADA	P	20 - 71	
	AUSTRALIA	X	20 - 21	YES
	PX	Y	32 - 70	
KR - V8080	GENERAL MARKET	M	20 - 11	NO
	CHINA	C		
	ENGLAND	T		
	EUROPE	E		

IC 501	: LA 2786
IC 502	: LV1015
IC 503	: NJM4565 L - D
IC 701	: NJM2279D
Q601 - 603	: UN5212 or DTC124EU
Q604	: 2SC3940A (R.S) or 2SD863 (E.
D601, 602	: MA111
D603	: RD10ES (B) or HZS10N (B)
D703, 704	: RD5.1ES (B2) or HZS5.1N (B2)
D705, 706	: ISS133 or HSS104

——— SIGNAL LINE  
 ——— GND LINE  
 ——— +B LINE  
 - - - -B LINE

KR - V7080 / V8080 (3/5)

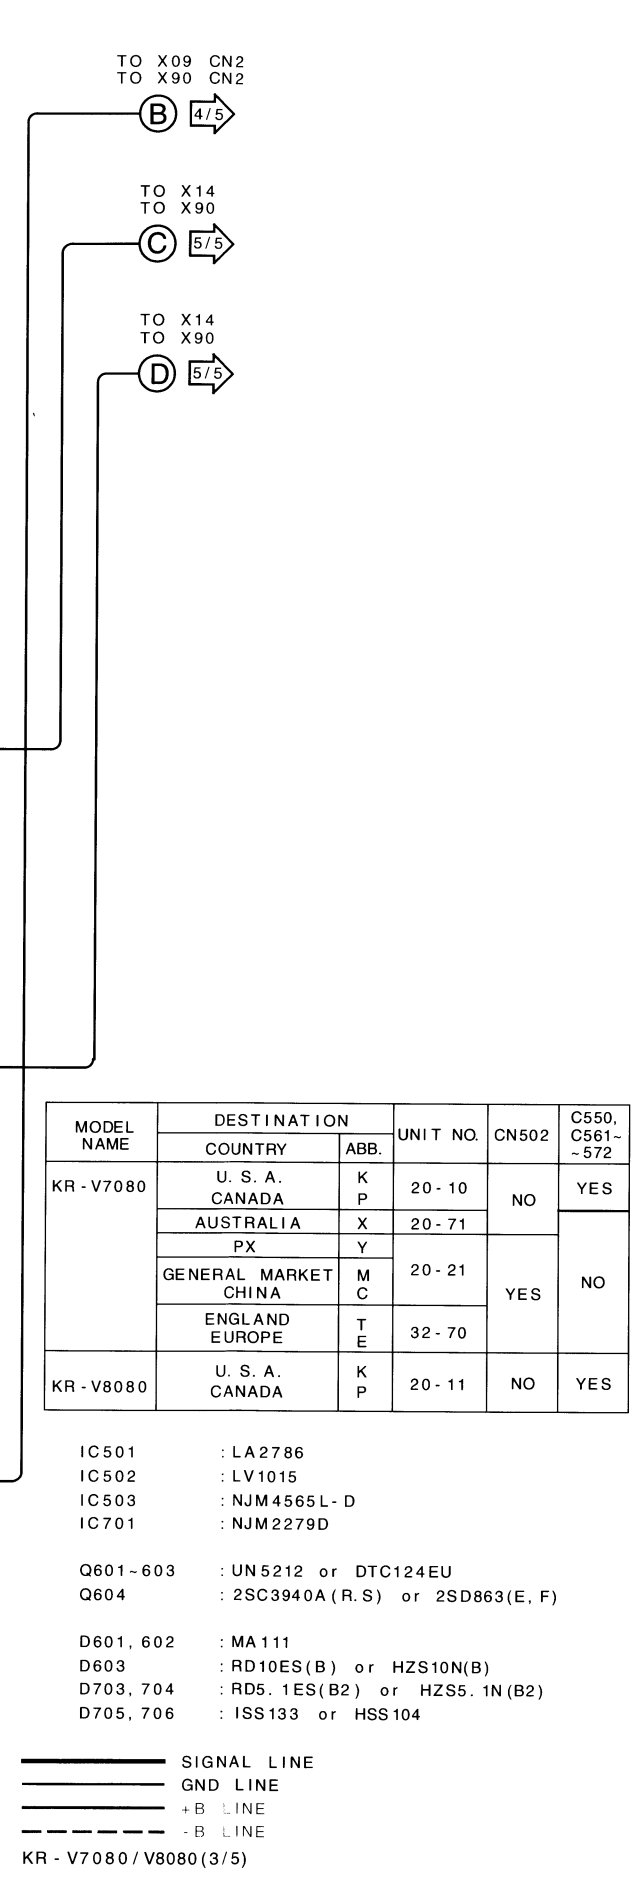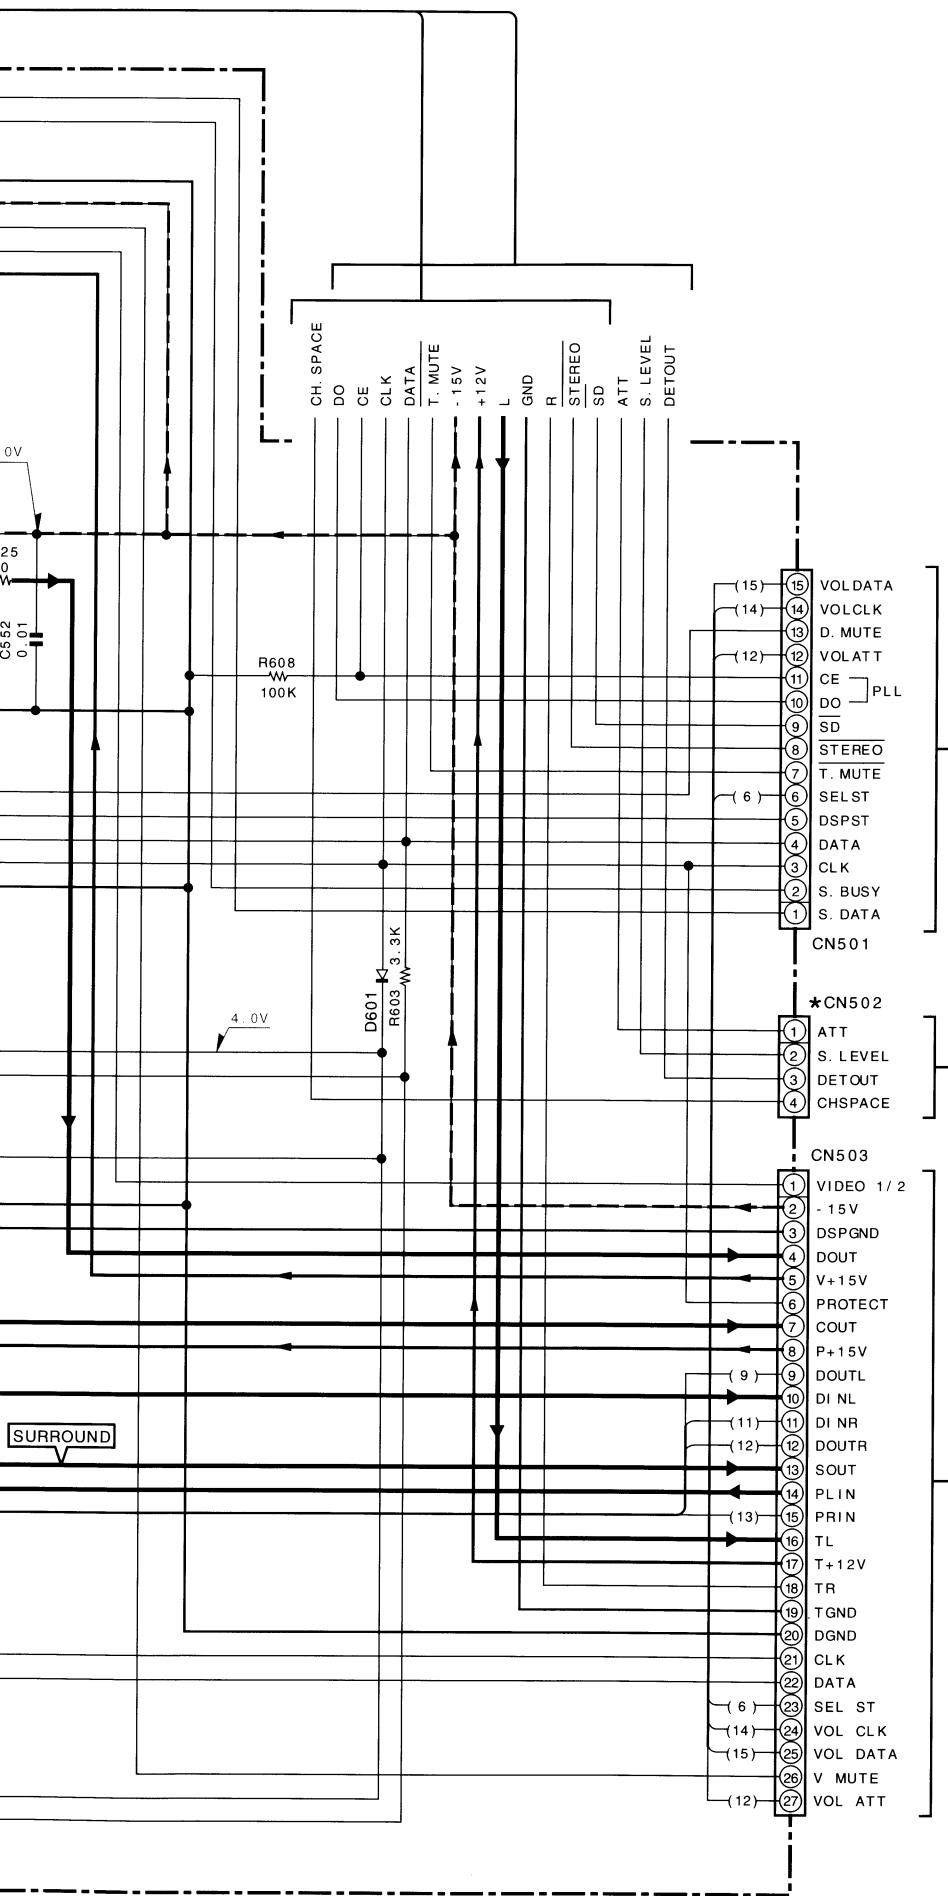

**CAUTION:** For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). \* indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter as the AM/FM signal generator is specified to the conditions as shown in the list below. The measurement value may vary depending on the measuring instruments used or on the product. The value shown in ( ) is actual reading measured in the AM mode.

MODE	CARRIER	MODULATION		ANT INPUT
		FREQUENCY	DEVIATION	
FM	98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
AM	1000(999)kHz	400Hz	MONO 30% MOD	60dB

MODEL NAME	DESTINATION		UNIT NO.	CN502	C550, C561~572
	COUNTRY	ABB.			
KR - V7080	U. S. A. CANADA	K P	20 - 10	NO	YES
	AUSTRALIA	X	20 - 71		
	PX	Y			
	GENERAL MARKET CHINA	M C	20 - 21	YES	NO
	ENGLAND EUROPE	T E	32 - 70		
KR - V8080	U. S. A. CANADA	K P	20 - 11	NO	YES

- IC501

IC502

IC503

IC701
- : LA2786

: LV1015

: NJM4565L - D

: NJM2279D
- Q601~603

Q604
- : UN5212 or DTC124EU

: 2SC3940A (R.S) or 2SD863(E, F)
- D601, 602

D603

D703, 704

D705, 706
- : MA111

: RD10ES(B) or HZS10N(B)

: RD5.1ES(B2) or HZS5.1N(B2)

: ISS133 or HSS104

— SIGNAL LINE  
— GND LINE  
— +B LINE  
— -B LINE  
KR - V7080 / V8080 (3/5)

Y05-3090-10

X14-41XX-XX A/6 [X90-3010-20 (M) X90-3013-01 (C)] (DISPLAY UNIT)

TO X09 CN1  
TO X90 CN1  
4/5 E



TO X14 CN501  
TO X90 CN501  
3/5 C

TO X14 CN502  
TO X90 CN502  
3/5 D

TO X09 WH1 or WH2  
TO X90 WH1  
4/5 F





TO X09  
TO X90  
4/5 G

TO X09  
TO X90  
4/5 H

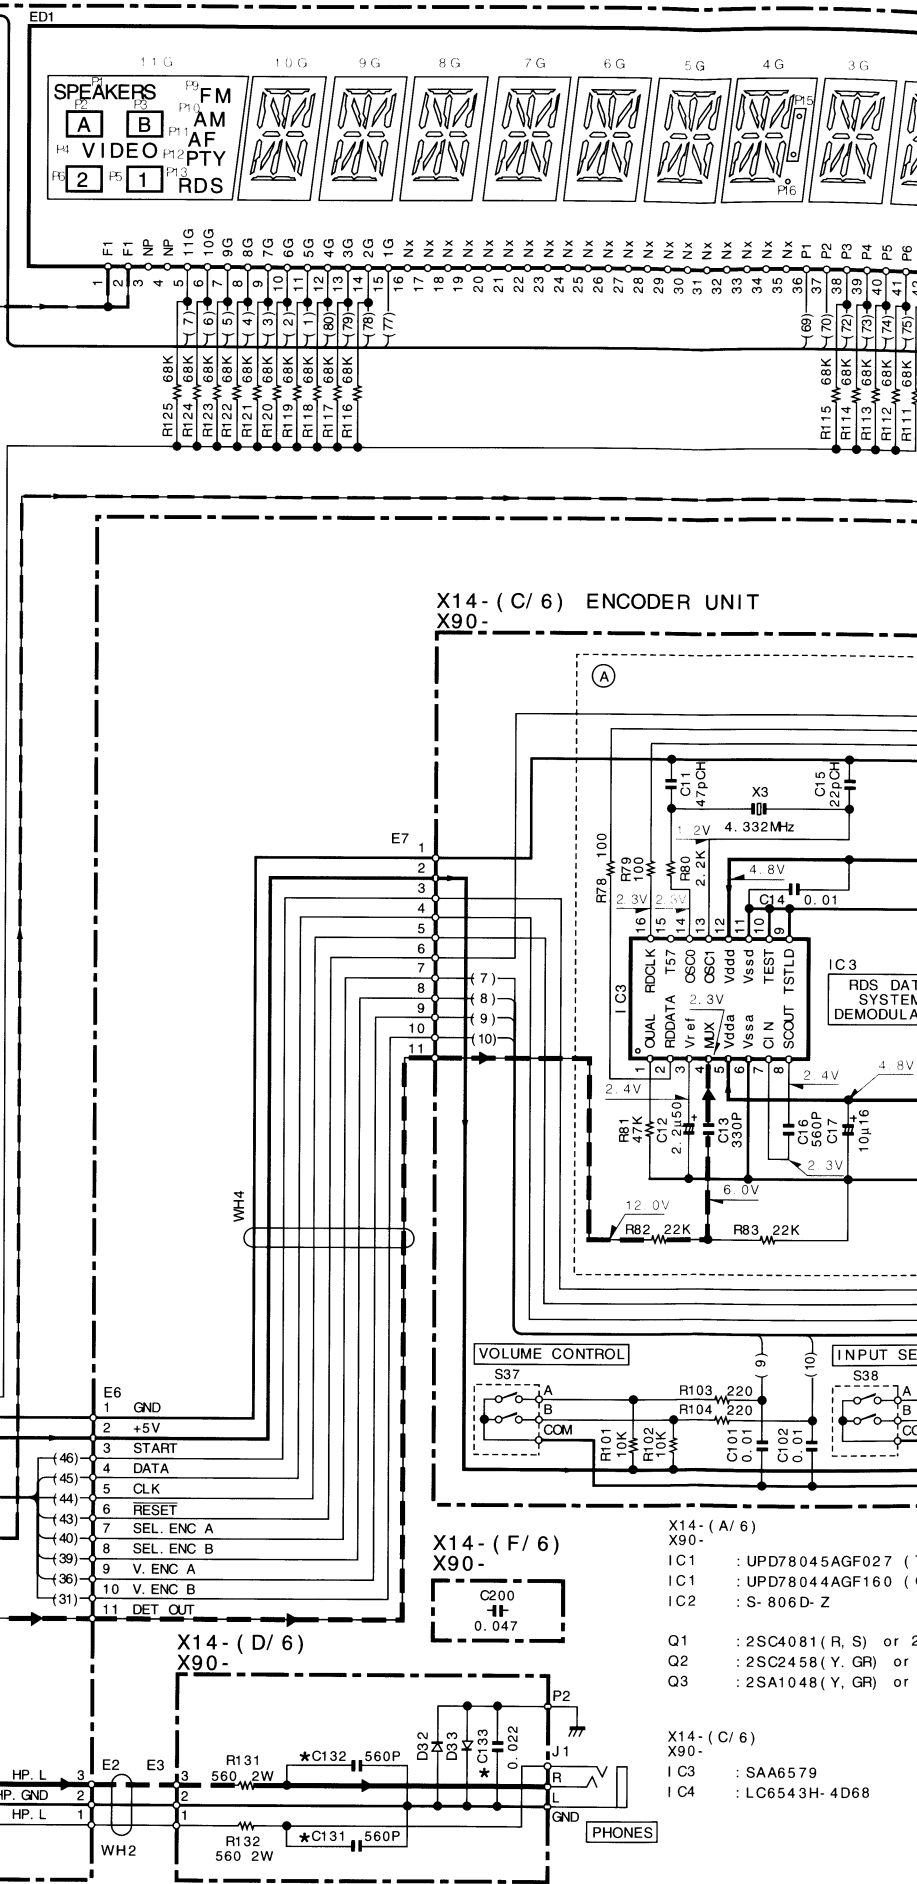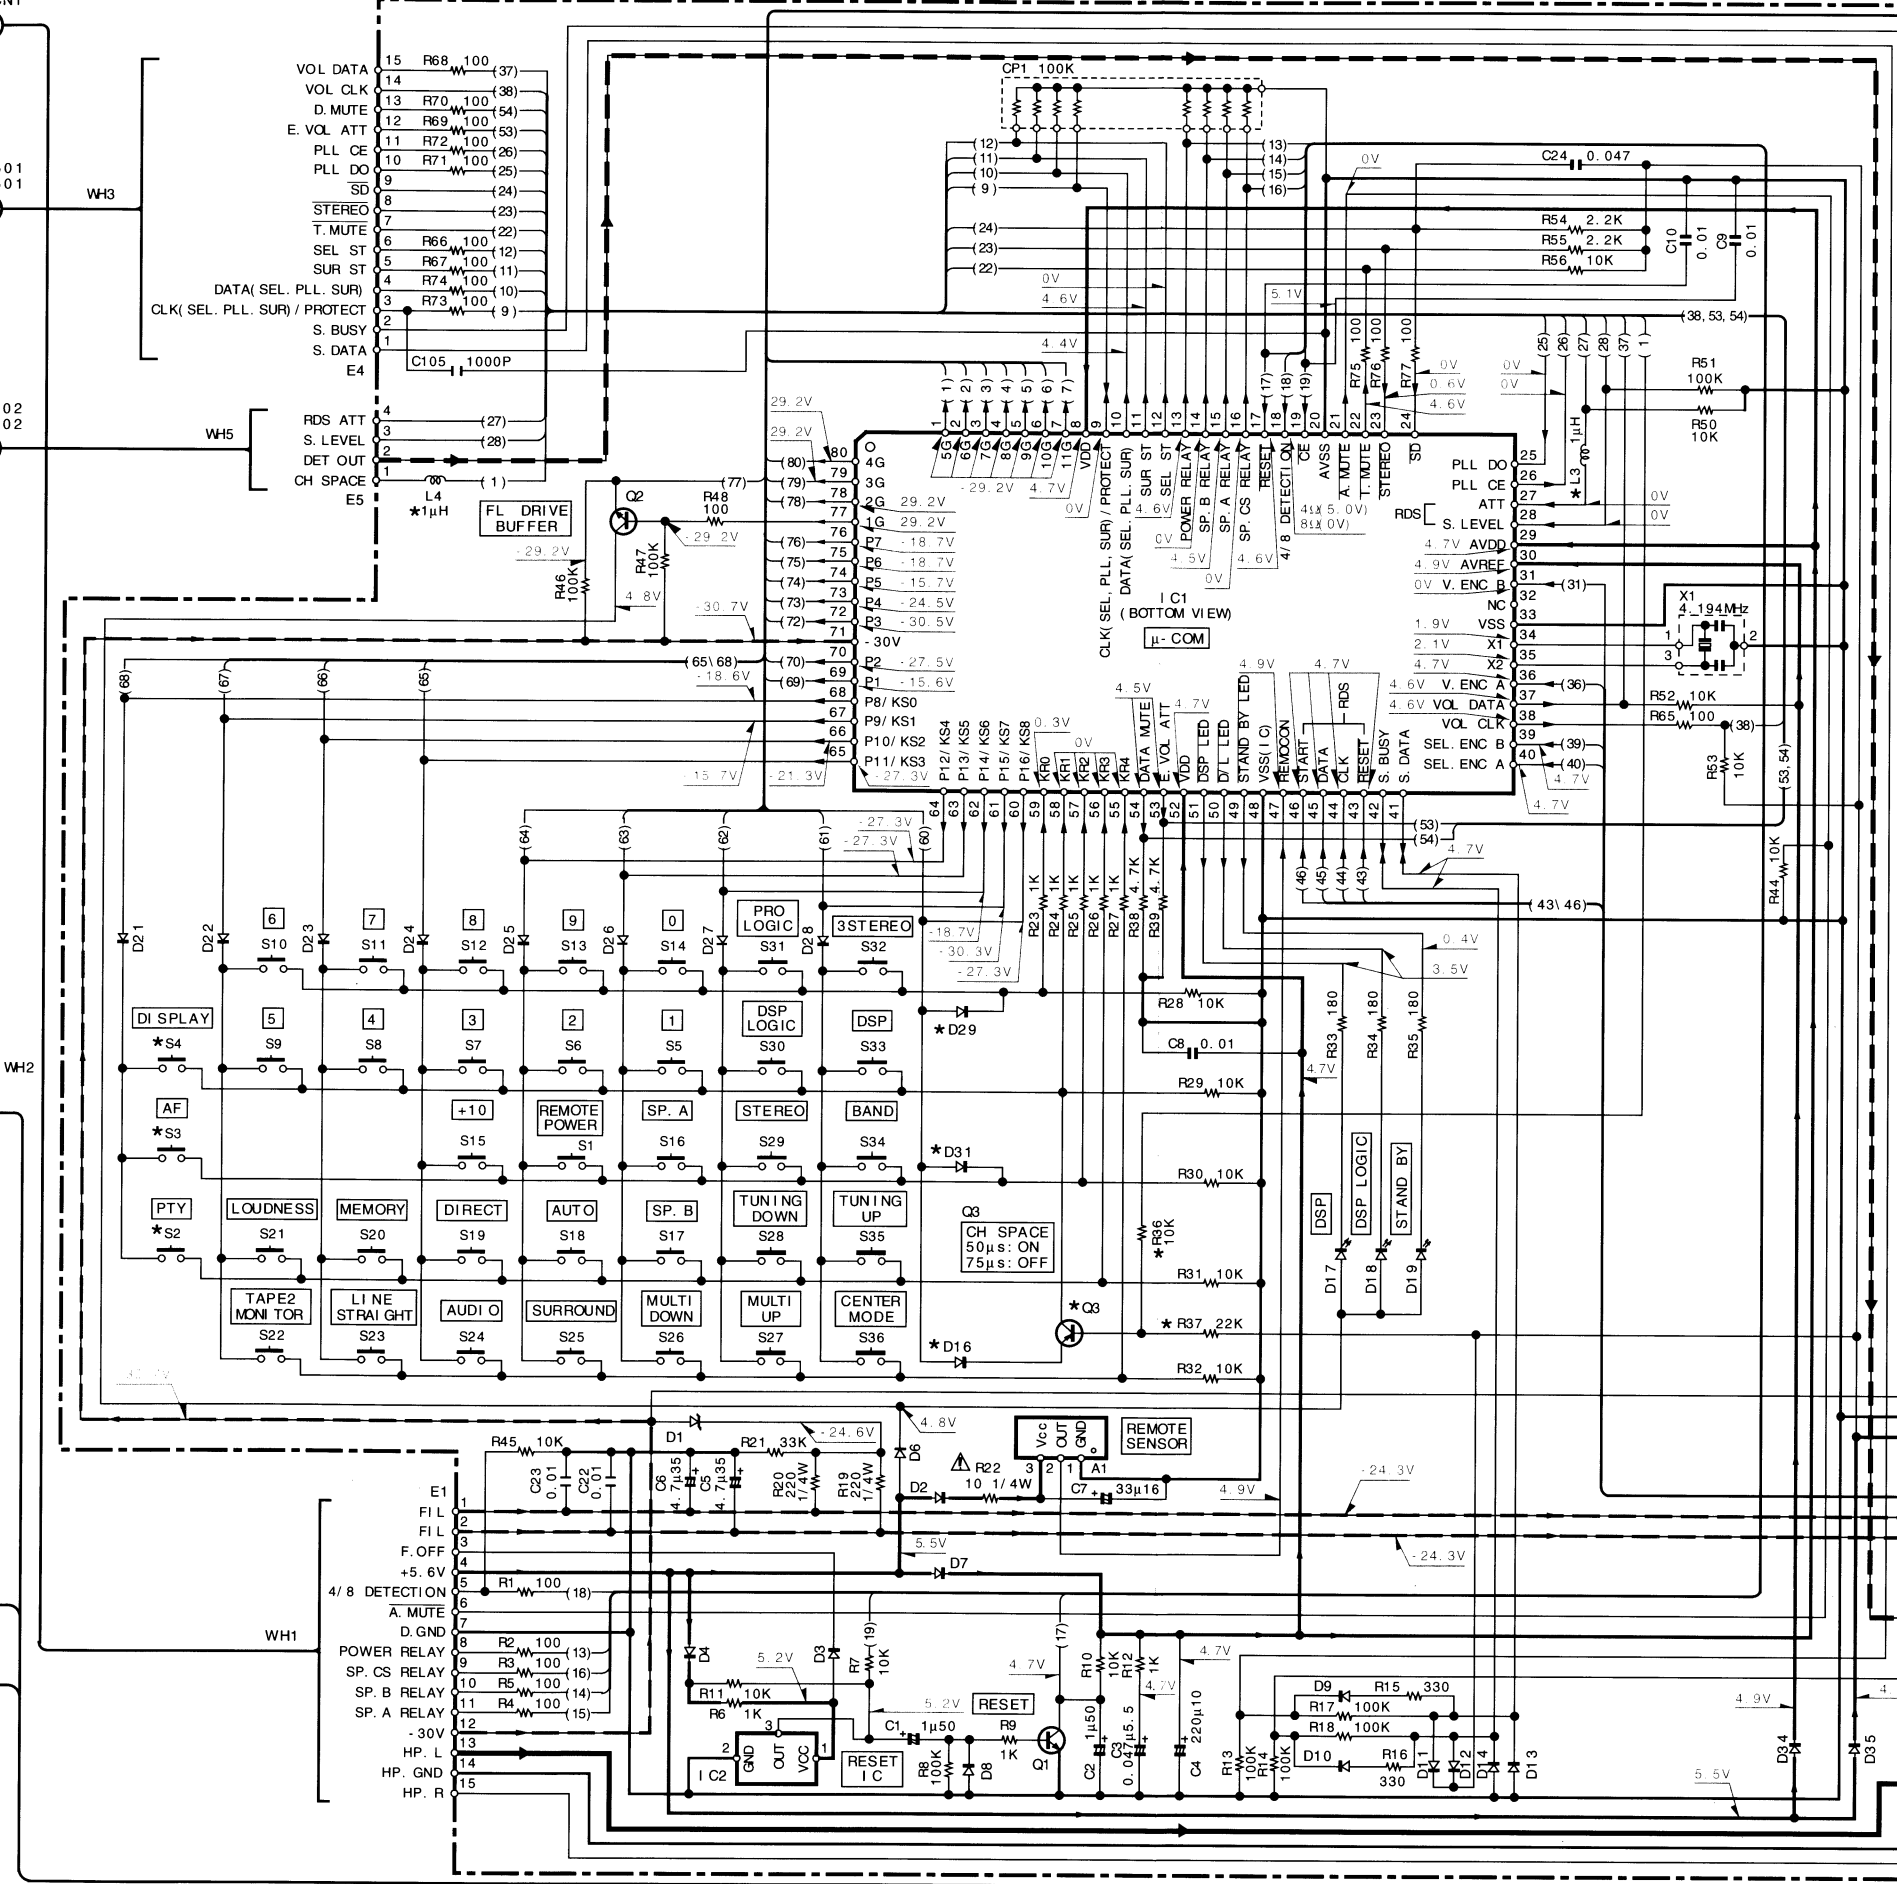


- X14- (A/6)  
X90-  
IC1 : UPD78045AGF027 ( )  
IC2 : UPD78044AGF160 ( )  
IC3 : S- 806D- Z
- Q1 : 2SC4081 (R, S) or 2SC4081 (Y, GR) or 2SC4081 (B, GR)  
Q2 : 2SC2458 (Y, GR) or 2SC2458 (B, GR)  
Q3 : 2SA1048 (Y, GR) or 2SA1048 (B, GR)
- X14- (C/6)  
X90-  
IC3 : SAA6579  
IC4 : LC6543H- 4D68


# 1 (DISPLAY UNIT)

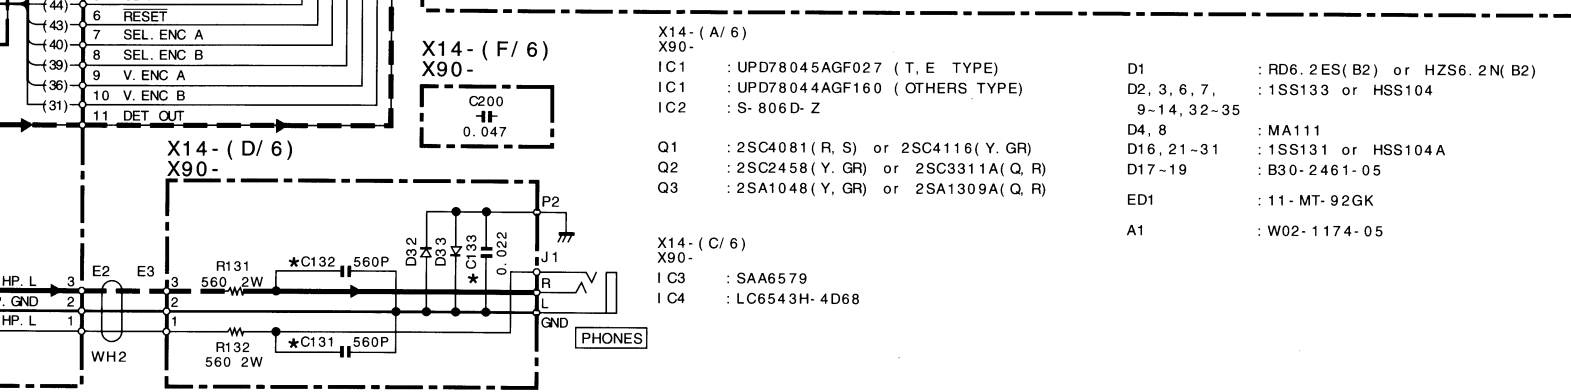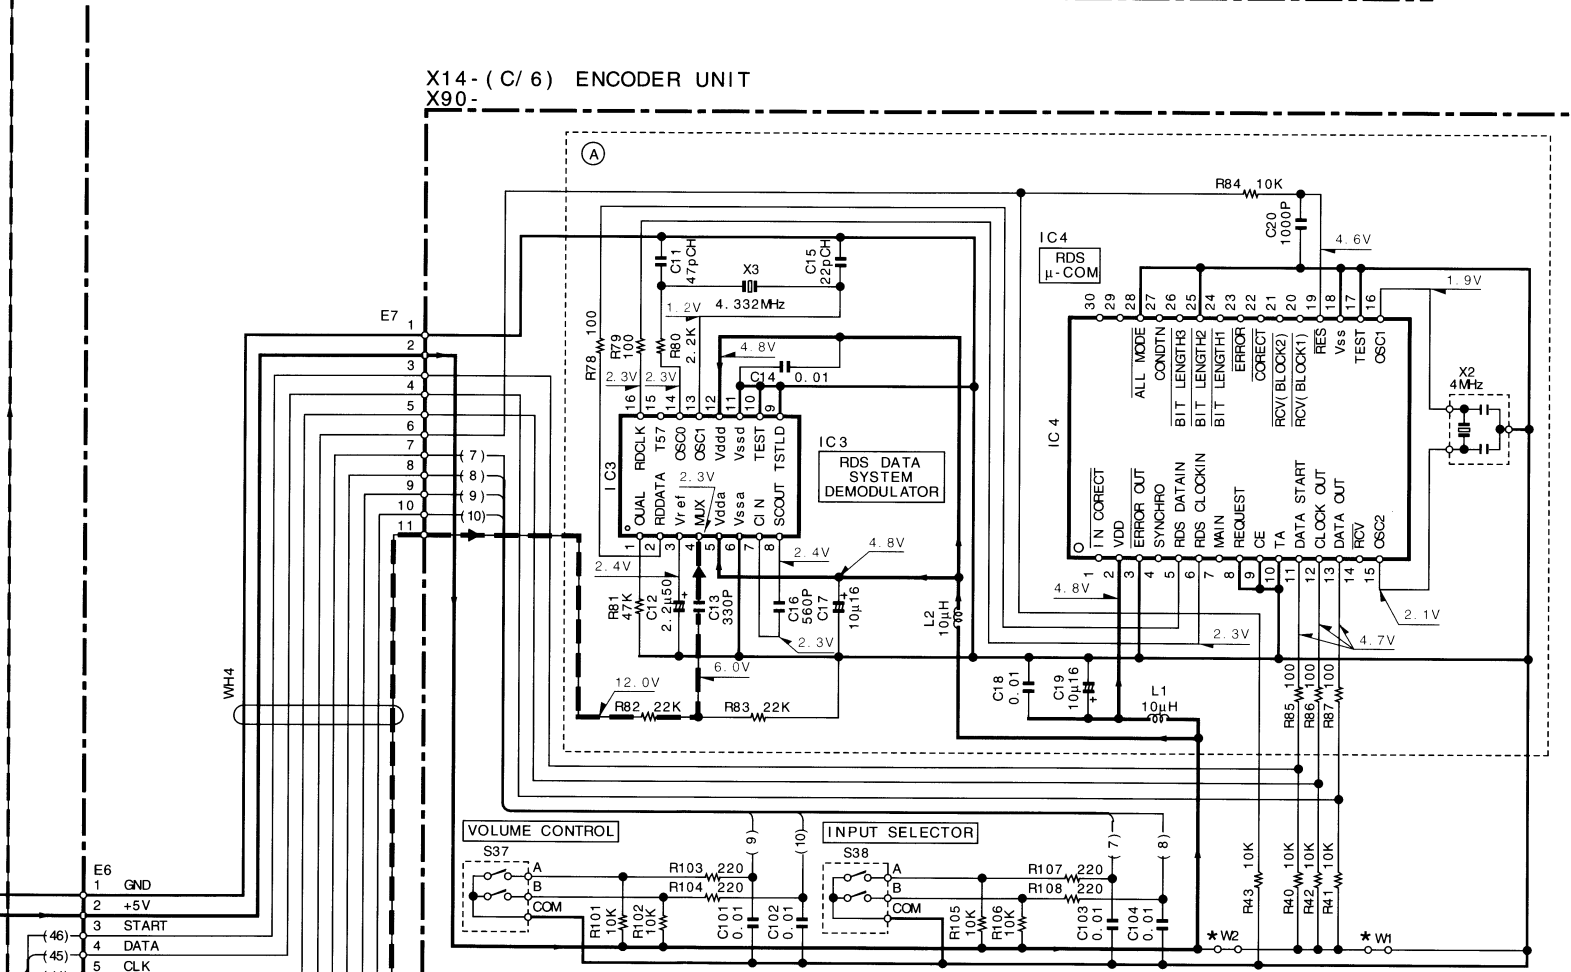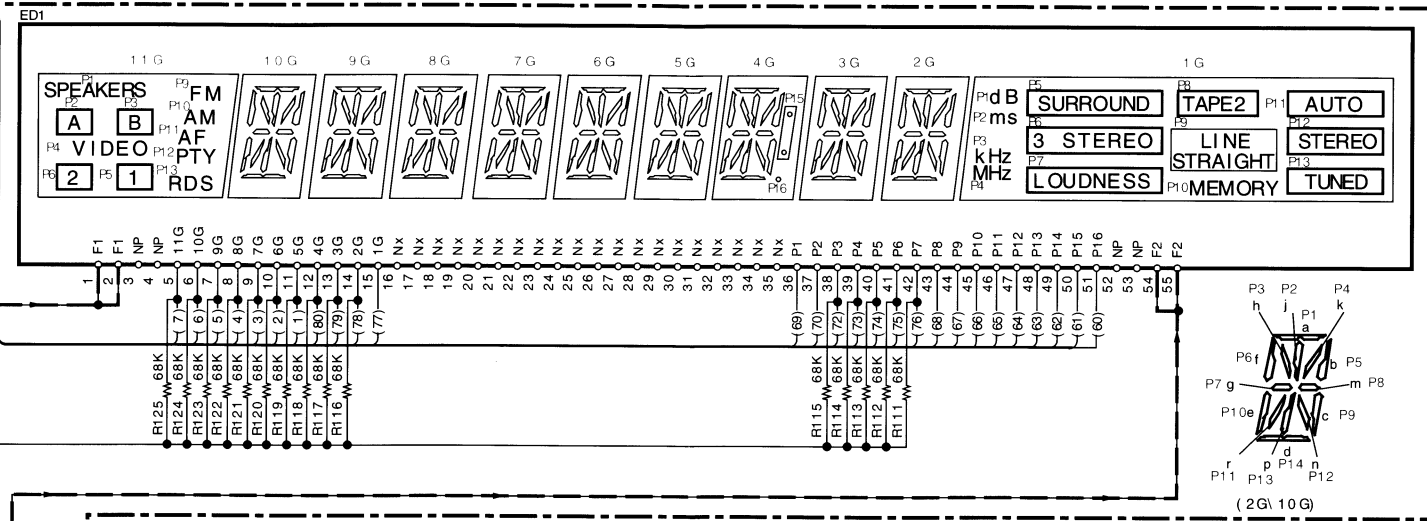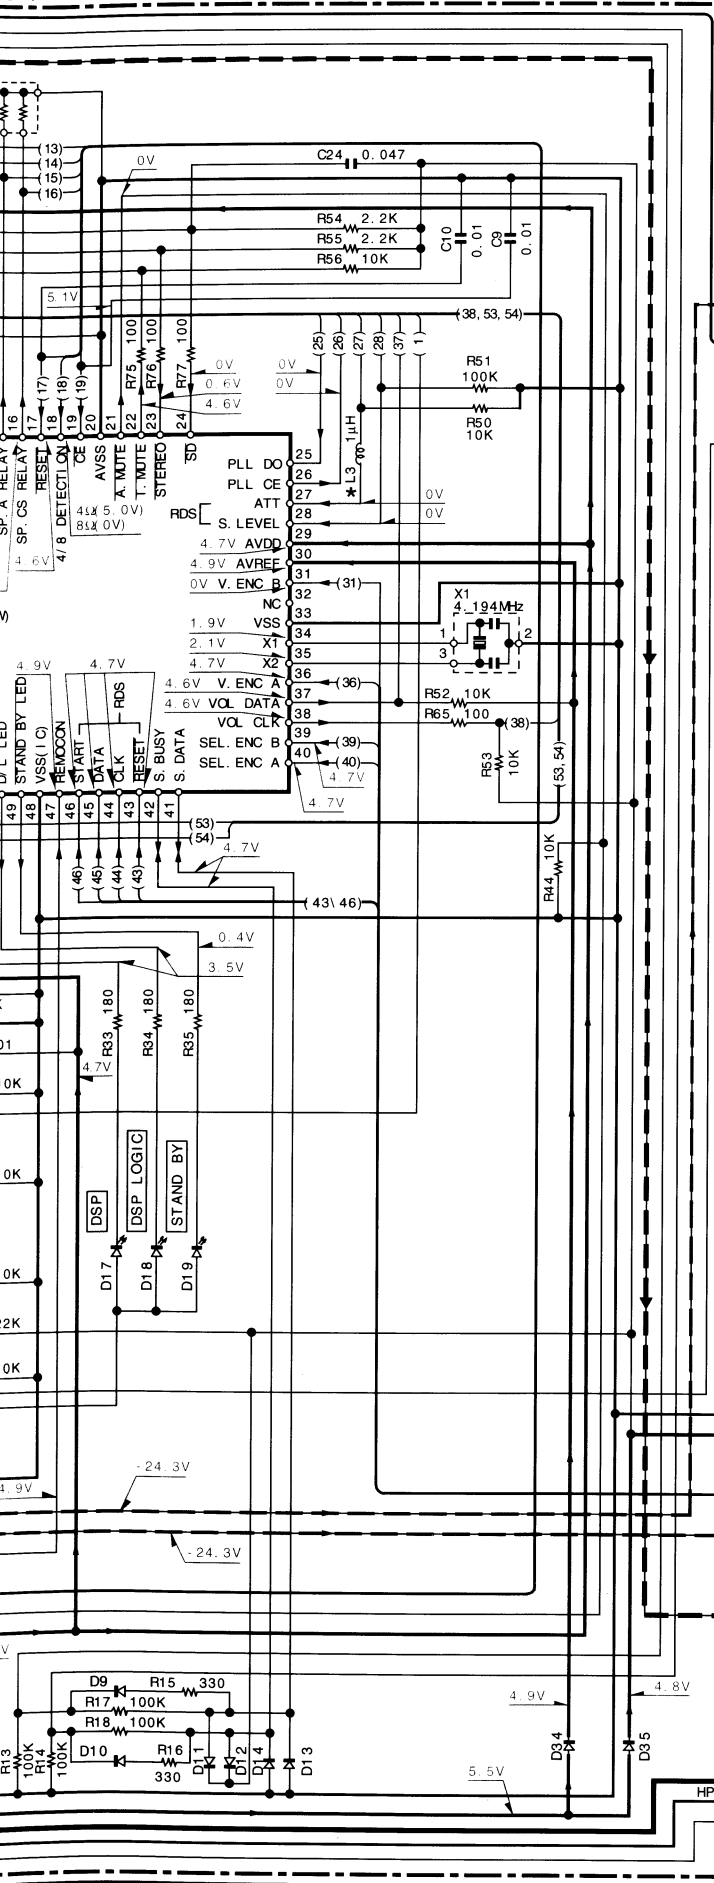

## KR-V7080/V8080 K, P TYPE


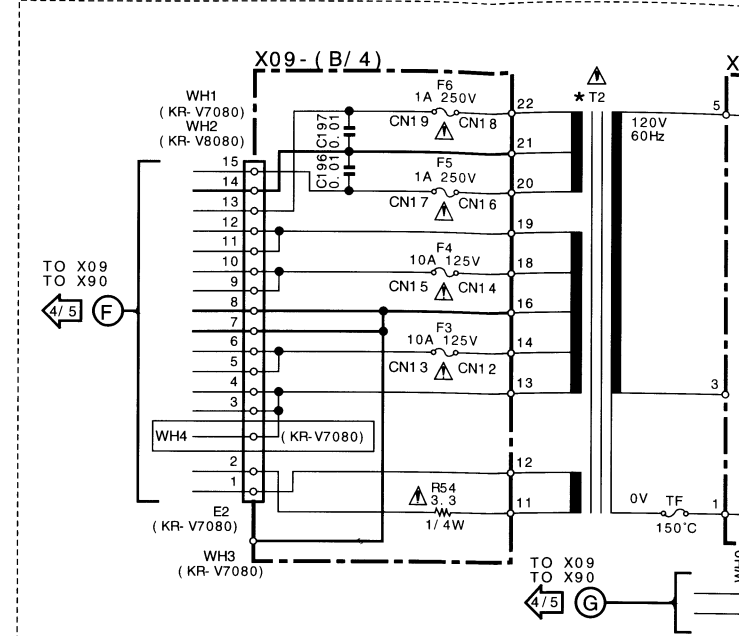


## KR-V7080 T, E, X, C TYPE

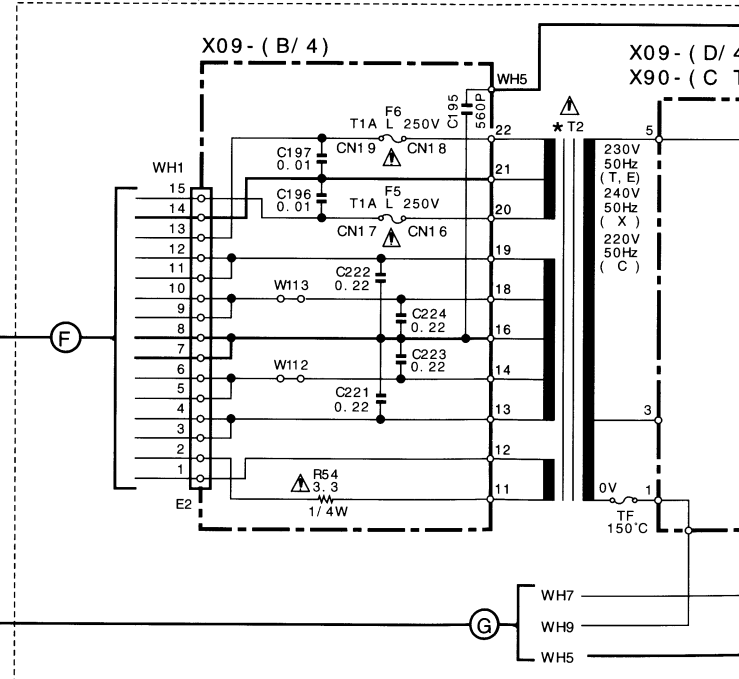


## X14-41XX-XX(A/6), (C/6)


X90-											
MODEL NAME	DESTINATION		UNIT NQ	D29	D31	D16 Q3	R36	R37	(A)	C131 C132	C133
	COUNTRY	ABB.									
KR- V7080	U. S. A.	K	20- 10	NO	NO				NO	NO	NO
	CANADA	P									
	AUSTRALIA	X	20- 71	YES	YES						
	PX	Y									
	GENERAL MARKET CHINA	M	20- 21		NO	YES	YES	YES			
	ENGLAND EUROPE	T	32- 70	YES							
		E			YES						
						NO	NO	NO			
KR- V8080	U. S. A.	K	20- 11	NO	NO				NO	NO	NO
	CANADA	P									

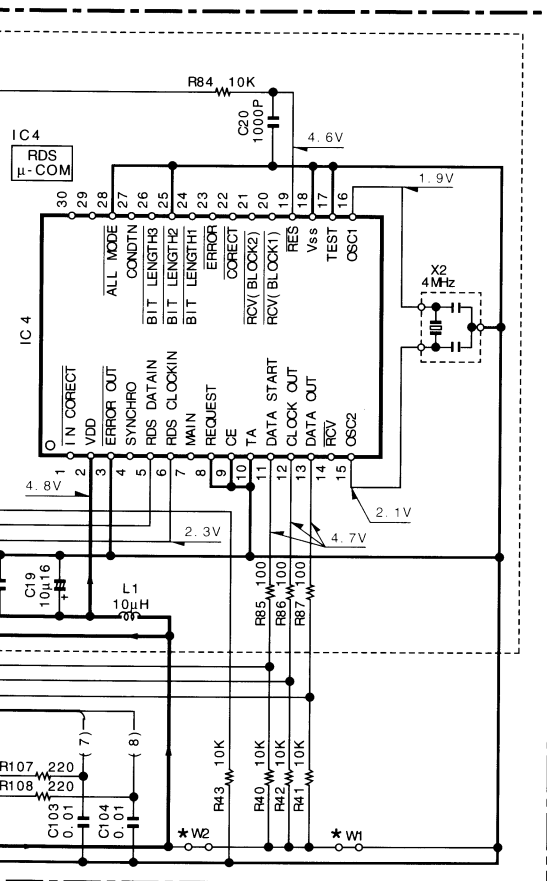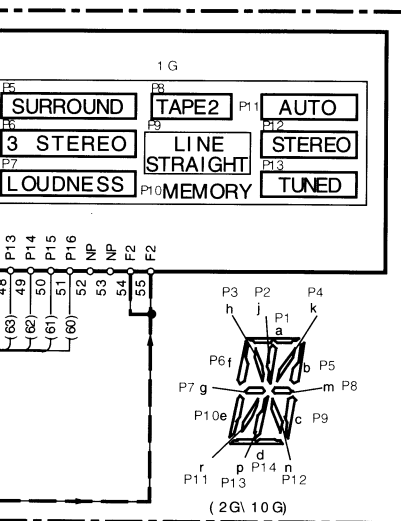

KR-V7080/V8080 K, P TYPE

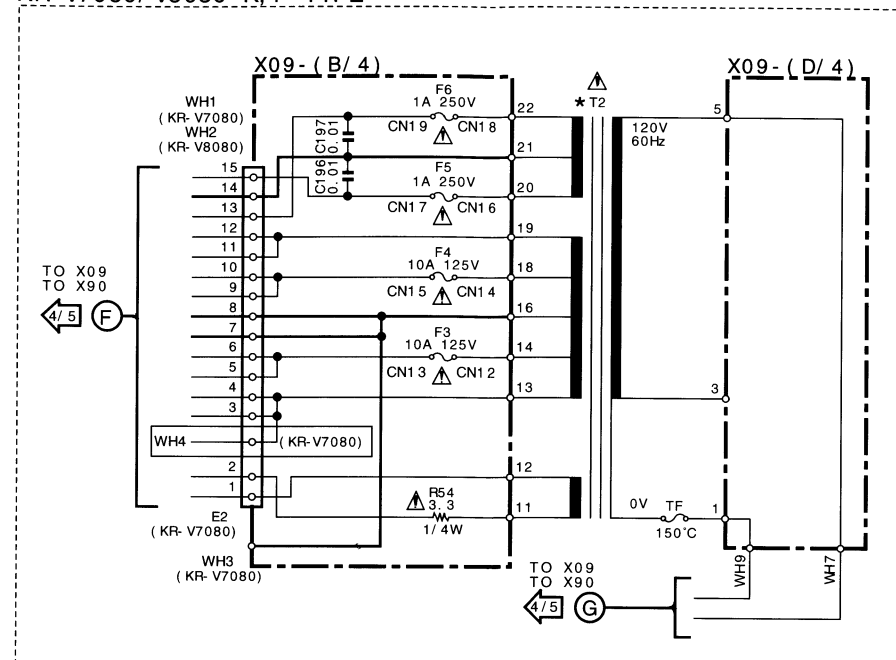


KR-V7080 T, E, X, C TYPE

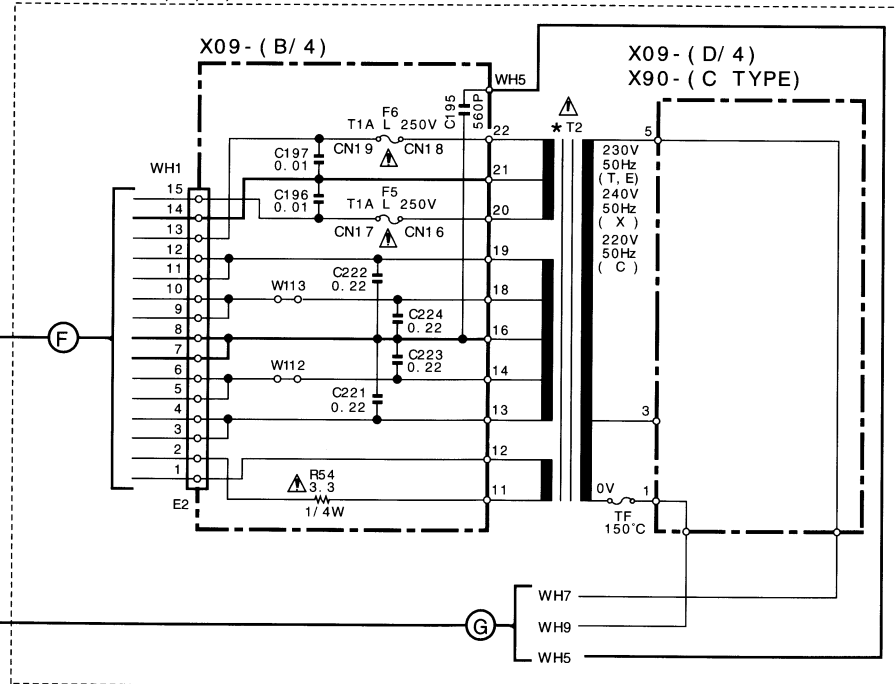X14-41XX-XX(A/6), (C/6)  
X90-

MODEL NAME	DESTINATION	UNIT NO.	D29	D31	D16 Q3	R36	R37	(A)	C131 C132	C133	S2, 3, 4	W1	W2	L3	L4
KR-V7080	U. S. A. CANADA	K P	20-10	NO	NO	NO	NO	NO	NO	NO	NO	YES	NO	NO	NO
	AUSTRALIA	X	20-71	YES	YES	NO	NO	NO	NO	NO	NO	YES	NO	NO	NO
	PX	Y													
	GENERAL MARKET CHINA	M C	20-21	YES	NO	YES	YES	YES	NO	YES	YES	YES	YES	YES	YES
	ENGLAND EUROPE	T E	32-70		YES	NO	NO	NO	YES	YES	YES	NO	YES	YES	NO
KR-V8080	U. S. A. CANADA	K P	20-11	NO	NO	NO	NO	NO	NO	NO	NO	YES	NO	NO	NO

KR-V7080 M, Y TYPE

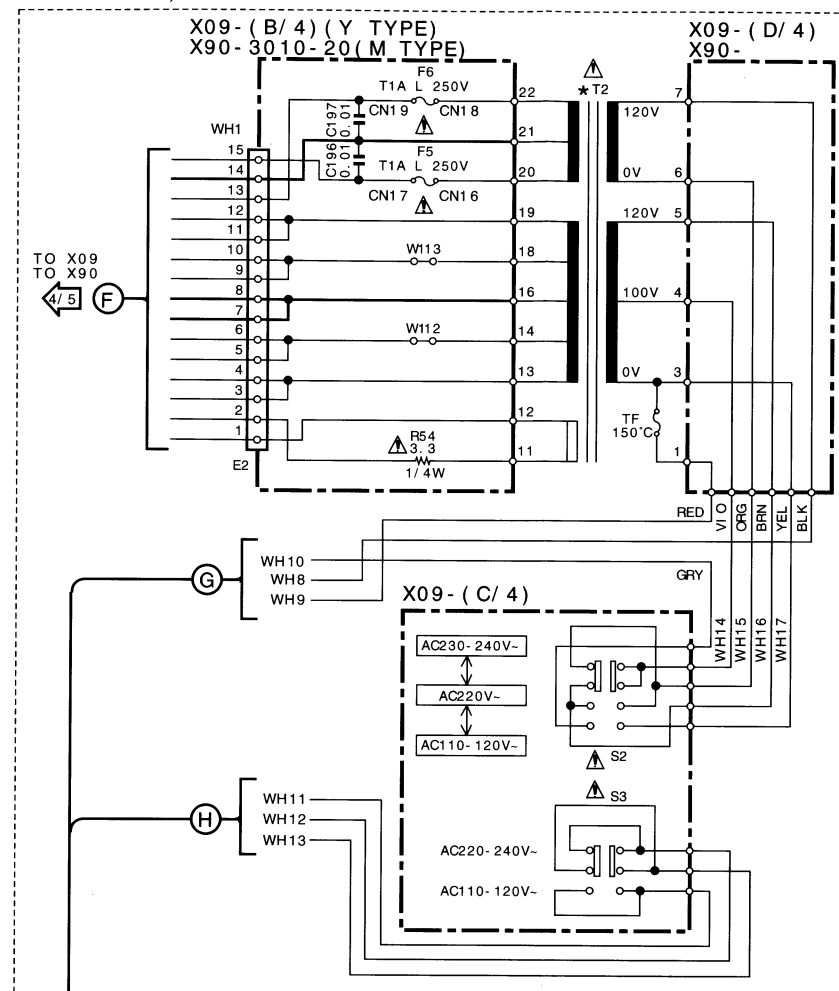X09-(B/4)(C/4)  
X90-(C,M TYPE)

MODEL NAME	DESTINATION	ABB.	T2
KR-V7080	U. S. A. CANADA	K P	L07-2059-05
	AUSTRALIA	X	L07-2061-05
	PX	Y	L07-2060-05
	GENERAL MARKET CHINA	M	L07-2146-05
	ENGLAND EUROPE	T E	L07-2062-05
KR-V8080	U. S. A. CANADA	K P	L07-2063-05

**CAUTION:** For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).  $\Delta$  indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter as the AM/FM signal generator is specified to the conditions as shown in the list below. The measurement value may vary depending on the measuring instruments used or on the product. The value shown in ( ) is actual reading measured in the AM mode.

MODE	CARRIER	MODULATION		ANT INPUT
		FREQUENCY	DEVIATION	
FM	98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
AM	1000(999)kHz	400Hz	MONO 30% MOD	60dB

--- SIGNAL LINE  
 --- GND LINE  
 --- +B LINE  
 --- -B LINE


KR-V7080/V8080 (5/5)

Y05-3090-10

# KR-V7080/V8080

## KENWOOD

## EXPLODED VIEW (UNIT)

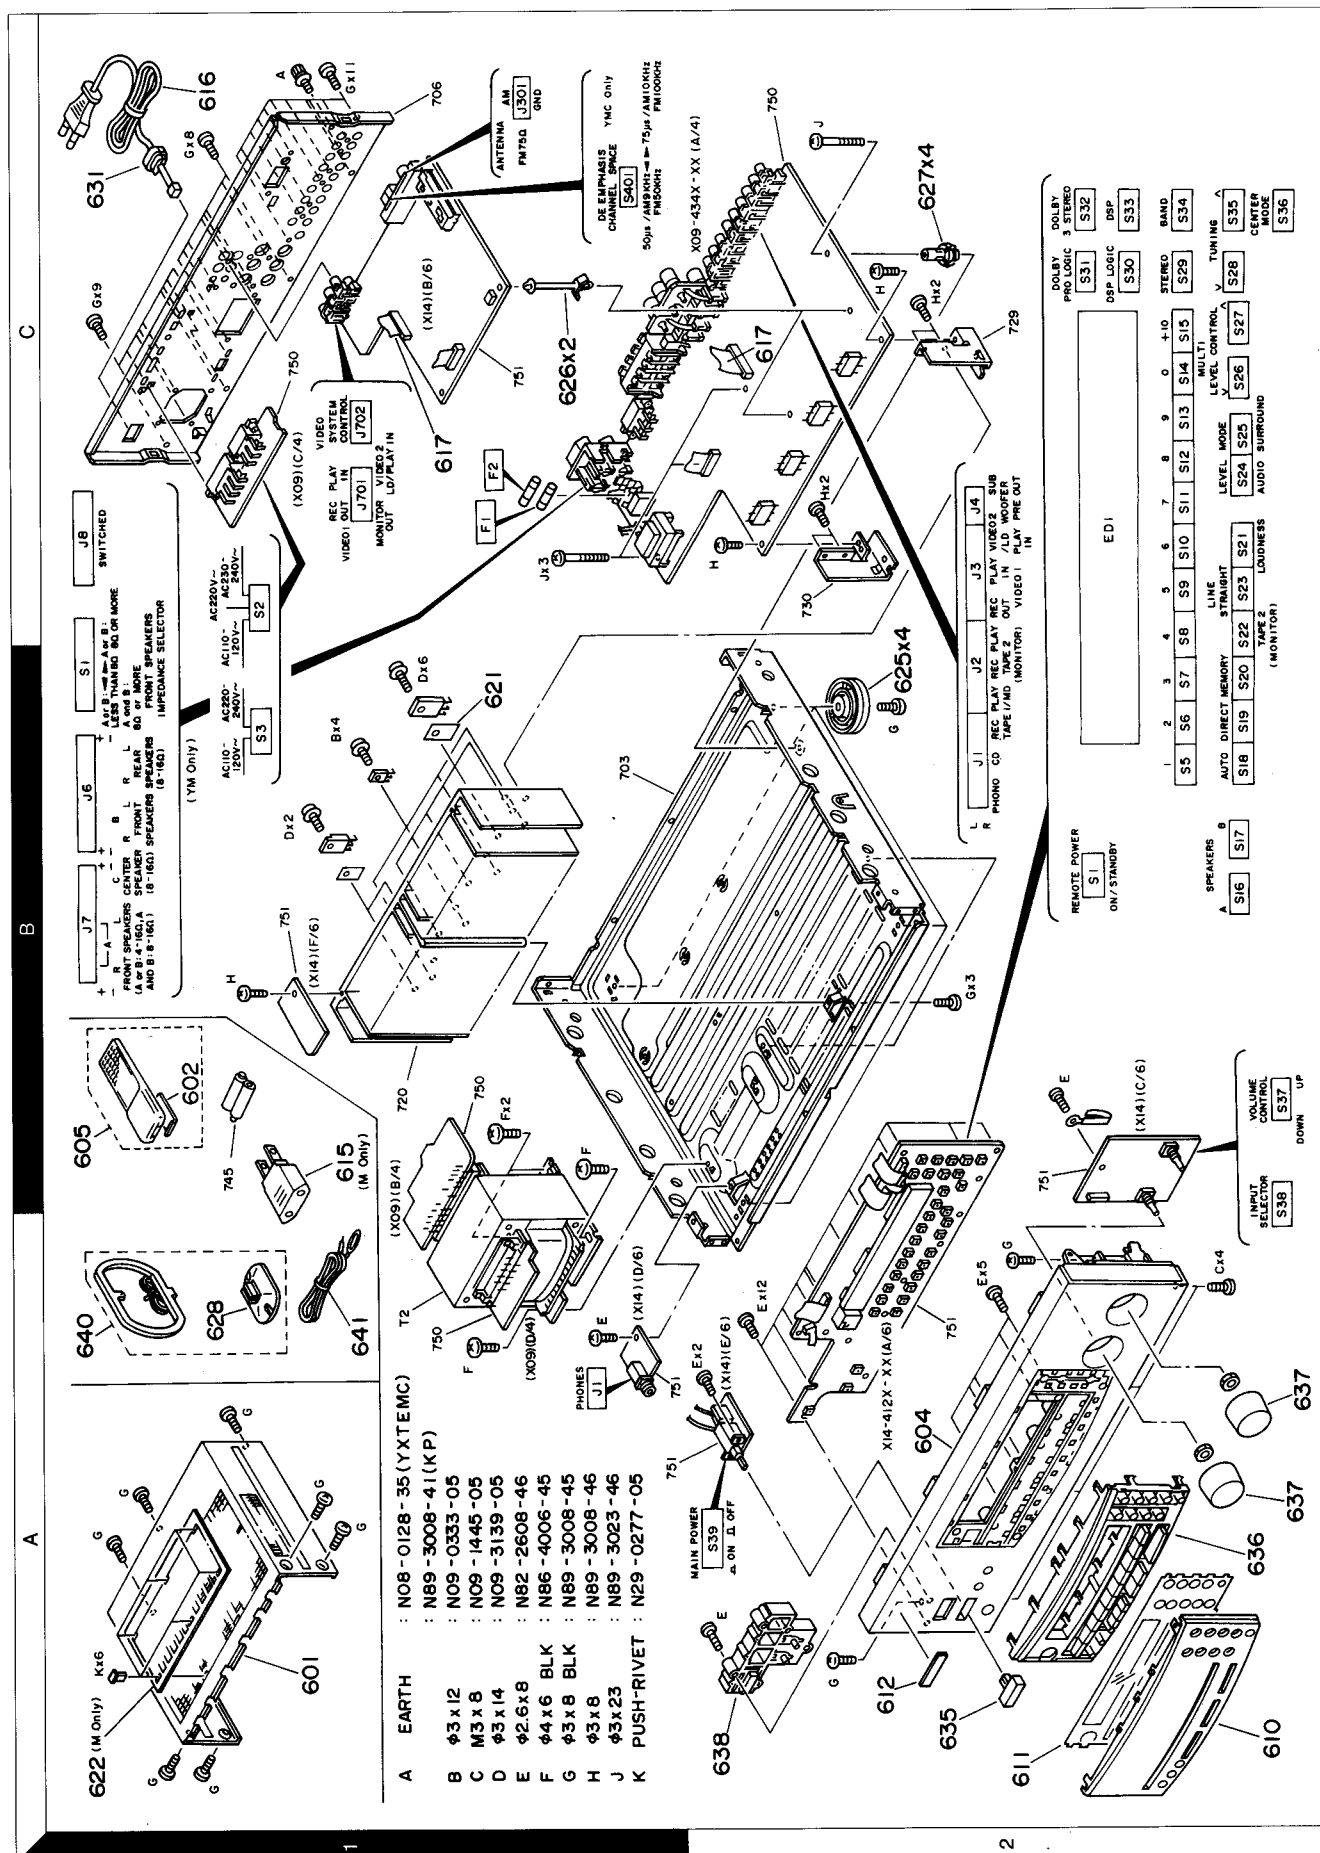

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

1

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
<b>KR-V7080/V8080</b>						
601	1A	*	A01-3269-01	METALLIC CABINET	KPY	7
602	1B	*	A09-0169-08	BATTERY COVER	XMC	7
604	2A	*	A60-0791-11	PANEL	TE	7
604	2A	*	A60-0792-11	PANEL		
604	2A	*	A60-0793-11	PANEL		
604	2A	*	A60-0794-11	PANEL	KPYXMC	8
605	1B	*	A70-1042-05	REMO-CON ASSY (RC-R0803)	TE	
605	1B	*	A70-1043-05	REMO-CON ASSY (RC-R0803)		
610	2A	*	B10-2170-02	FRONT GLASS	KPYXMC	
610	2A	*	B10-2253-02	FRONT GLASS	TE	
611	2A	*	B11-0294-02	COLOR FILTER		
612	2A	*	B43-0302-04	KENWOOD BADGE		
-	2A	*	B46-0092-43	WARRANTY CARD	KY	
-			B46-0096-53	WARRANTY CARD	X	
-			B46-0121-33	WARRANTY CARD	P	
-			B46-0197-00	QUESTIONNAIRE CARD	K	
-			B46-0310-03	WARRANTY CARD	TE	
-			B46-0326-03	WARRANTY CARD	C	
-		*	B58-0964-13	CAUTION CARD (CAUTION UL)	KY	
-		*	B58-0965-13	CAUTION CARD (TX TYPE PL)	XT	
-		*	B58-0966-13	CAUTION CARD (ELM TYPE PL)	EMC	
-		*	B58-0967-03	CAUTION CARD (P TYPE PL)	P	
-		*	B58-0968-04	CAUTION CARD	Y	
-		*	B59-1104-00	SERVICE DIRECTORY	Y	
-		*	B60-2485-00	I.MANUAL (KR-V7080/V8080 EN)	KPYXMC	
-		*	B60-2486-00	I.MANUAL (KR-V7080 EN)	T	
-		*	B60-2487-00	I.MANUAL (KR-V7080/V8080 FR)	P	
-		*	B60-2488-00	I.MANUAL (KR-V7080 FR/D)	E	
-		*	B60-2489-00	I.MANUAL (KR-V7080 IT/SP)	E	
-		*	B60-2490-00	I.MANUAL (KR-V7080 SP)	M	
-		*	B60-2491-00	I.MANUAL (KR-V7080 G)	E	
-		*	B60-2492-00	I.MANUAL (KR-V7080 C)	MC	
-		*	B60-2493-00	I.MANUAL (KR-V7080 TAIWAN)	M	
615	1B		E03-0115-05	AC PLUG ADAPTER	M	
616	1C		E03-2592-15	AC POWER CORD	M	
616	1C		E30-2739-05	AC POWER CORD	M	
616	1C		E30-2787-05	AC POWER CORD	Y	
616	1C		E30-2788-05	AC POWER CORD	KP	
616	1C		E30-2790-05	AC POWER CORD	E	
616	1C		E30-2791-05	AC POWER CORD	X	
616	1C		E30-2825-05	AC POWER CORD	T	
617	1C,2C	*	E35-1319-05	FLAT CABLE(27P/X09CN2-X14CN503	C	
621	1B		F20-1322-15	INSULATING BOARD	M	
622	1A	*	F20-1472-03	INSULATING BOARD		
-		*	H50-1736-04	ITEM CARTON CASE	KPYX	8
-		*	H50-1749-04	ITEM CARTON CASE	M	7
-		*	H50-1750-04	ITEM CARTON CASE	T	7
-		*	H50-1751-04	ITEM CARTON CASE	C	7
-		*	H50-1752-04	ITEM CARTON CASE		
-		*	H10-7126-12	POLYSTYRENE FOAMED FIXTURE (L)	KPYX	
-		*	H10-7126-12	POLYSTYRENE FOAMED FIXTURE (L)	MC	
-		*	H10-7127-12	POLYSTYRENE FOAMED FIXTURE (R)	KPYX	

L : Scandinavia  
Y : PX(Far East, Hawaii)  
Y : AAFES(Europe)

K : USA  
T : Europe  
X : Australia

P : Canada  
E : Europe  
M : Other Areas

C : China

7 : KR-V7080  
8 : KR-V8080

Δ indicates safety critical components.

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

2

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
-		*	H10-7127-12	POLYSTYRENE FOAMED FIXTURE (R)	MC	
-		*	H10-7128-12	POLYSTYRENE FOAMED FIXTURE (L)	T	
-		*	H10-7129-12	POLYSTYRENE FOAMED FIXTURE (R)	X	
-		*	H13-0223-04	CARTON BOARD	KPYX	
-		*	H25-0232-04	PROTECTION BAG (235X350X0.03)		
-		*	H25-0232-04	PROTECTION BAG (235X350X0.03)	MC	
-		*	H25-0651-04	PROTECTION BAG (0232 PRINTED)	T	
-		*	H25-0661-04	PROTECTION BAG		
625	2B	*	J02-1148-13	FOOT (D=46,H=14.5)		
626	1C	*	J19-3385-05	UNIT HOLDER		
627	2C	*	J19-3731-04	UNIT HOLDER		
628	1A	*	J19-3645-05	LOOP ANTENNA STAND		
631	1C	*	J42-0083-05	POWER CORD BUSHING		
-		*	J19-2808-05	HOLDER	MC	
-		*	J61-0098-05	WIRE BAND		
-		*	J61-0307-05	WIRE BAND		
635	2A	*	K27-2176-04	KNOB (MAIN POWER)		
636	2A	*	K29-6246-12	KNOB (INPUT SEL/VOLUME)		
637	2A	*	K29-6247-04	KNOB (REMOTE POWER)	KPYXMC	
638	2A	*	K29-6282-02	KNOB (REMOTE POWER)	TE	
-	T2	*	L07-2059-05	POWER TRANSFORMER	KP	7
-	Δ T2	*	L07-2060-05	POWER TRANSFORMER	Y	
-	Δ T2	*	L07-2061-05	POWER TRANSFORMER	X	
-	Δ T2	*	L07-2062-05	POWER TRANSFORMER	TE	
-	Δ T2	*	L07-2063-05	POWER TRANSFORMER	KP	8
-	Δ T2	*	L07-2142-05	POWER TRANSFORMER	C	
-	Δ T2	*	L07-2146-05	POWER TRANSFORMER	M	
640	1A	*	T90-0195-05	LOOP ANTENNA		
641	1A	*	T90-0810-05	LEAD WIRE ANTENNA		
<b>AUDIO UNIT (X09-434X-XX)</b>						
C1,2			CC45FSL1H390J	CERAMIC	KPYXMC	
C3,4			CE04KW1H100M	ELECTRO	J	
C5,6			CC45FSL1H221J	CERAMIC	50WV	
C7,8			CE04KW1A101M	ELECTRO	J	
C9,10			CK45FB1H102K	CERAMIC	10WV	
C11,12			CQ93FMG1H123J	MYLAR	1000PF	
C13,14			CQ93FMG1H332J	MYLAR	0.012UF	
C15,16			CE04KW1V4R7M	ELECTRO	3300PF	
C17			CE04DW1V102M	ELECTRO	4.7UF	
C18			CE04DW1V471M	ELECTRO	1000UF	
C19,20			CK45FE2H103P	CERAMIC	470UF	
C21,22			C91-0749-05	CERAMIC	P	
C23,24			C91-0749-05	CERAMIC	TE	
C25,26			C91-0749-05	CERAMIC	K	
C27,28			C91-0749-05	CERAMIC	K	
C29,30			C91-0749-05	CERAMIC	K	
C31,32			C91-0749-05	CERAMIC	K	
C33,36			CQ93FMG1H102J	MYLAR	220PF	
C37			CE04KW1J221M	ELECTRO	1000PF	
C38			CK45FB1H102K	CERAMIC	220UF	
C39,40			CE04KW1E470M	ELECTRO	63WV	
C41,42					1000PF	
					47UF	
					25WV	

L : Scandinavia  
Y : PX(Far East, Hawaii)  
Y : AAFES(Europe)

K : USA  
T : Europe  
X : Australia

P : Canada  
E : Europe  
M : Other Areas

C : China

7 : KR-V7080  
8 : KR-V8080

Δ indicates safety critical components.



⚠ indicates safety critical components.

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

45

3

Ref. No	Add- ress	New Parts	Parts No.	Description	Desti- nation	Re- marks
C43-45			CE04KW1C470M	47UF	16WV	
C46			CE04KW1H100M	10UF	50WV	7
C47-48			C90-3536-05	6800UF	71WV	8
C49		*	C90-3602-05	1200UF	71WV	8
			CQ93FMG1H102J	1000PF	J	
C50			CE04HW1A220M	22UF	10WV	
C51			CE04KW1C220M	22UF	16WV	
C52-53			CE04KW1C470M	47UF	16WV	
C54-56			CK45FE2H103P	0.010UF	P	
C57			CE04KW1C470M	47UF	16WV	
C58			CK45FB1H102K	1000PF	K	
C59			CQ93FMG1H102J	1000PF	J	8
C60			CE04KW1C470M	47UF	16WV	
C61			CE04KW2A100M	10UF	100WV	
C62			CE04KW2A101M	100UF	100WV	
C63-64			CE04KW1H010M	1.0UF	50WV	
C65			CQ93FMG1H102J	4.7UF	35WV	
C66			CE04KW1H2R2M	1000PF	J	8
C67-68			CE04KW1H2R2M	2.2UF	50WV	
C69-70			CQ93FMG1H102J	1000PF	J	8
C71-72			CK45FB1H102K	1000PF	K	7
C71-72			CK45FB1H471K	470PF	K	7
C71-72			CQ93FMG1H471J	470PF	J	8
C73-76			CE04KW1C220M	22UF	16WV	
C77			CK45FB1H471K	470PF	K	
C78-79			CQ93FMG1H102J	1000PF	J	8
C80-81			CK45FF1H103Z	0.010UF	Z	
C82-83			CC45FSL1H221J	220PF	J	
C84			C91-0749-05	220PF	K	
C86			CE04KW1H2R2M	2.2UF	50WV	
C87-88			CK45FE2H103P	0.010UF	P	
C89-90			CE04KW1H010M	1.0UF	50WV	
C91-94			CQ93FMG1H682J	6800PF	J	
C95-96			CK45FE1H103Z	0.010UF	Z	
C98			CK45FB1H102K	1000PF	K	
C101-102			CE04KW1H010M	1.0UF	50WV	
C103-104			CQ93FMG1H102J	1000PF	J	
C109-110			CE04KW1A101M	100UF	10WV	
C111-112			CC45FSL1H101J	100PF	J	
C113-114			CE04KW2A010M	1.0UF	100WV	
C115-116			CK45FB1H471K	470PF	K	
C119-120			CC45FSL1H120J	12PF	J	
C119-120			CC45FSL1H180J	18PF	J	
C121-122			CC45FSL2H470J	47PF	J	
C121-122			CC45FSL2H680J	68PF	J	
C125-128			CK45FE1H103Z	0.010UF	Z	
C129			CQ93FMG1H123J	0.012UF	J	7
C129			CQ93FMG1H562J	5600PF	J	8
C131-132			CQ93FMG1H104J	0.10UF	J	
C133-134			CQ93FMG1H183J	0.018UF	J	
C139			CQ93FMG1H123J	0.012UF	J	
C140			CK45FB1H102K	1000PF	K	
C141-142			CE04KW1H010M	1.0UF	50WV	
C143-144			CQ93FMG1H102J	1000PF	J	
C145			CK45FB1H471K	470PF	K	

L : Scandinavia K : USA P : Canada 7 : KR-V7080  
Y : PX(Far East, Hawaii) T : Europe E : Europe 8 : KR-V8080  
V : AAFES(Europe) X : Australia M : Other Areas  
⚠ indicates safety critical components.

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

4

Ref. No	Add- ress	New Parts	Parts No.	Description	Desti- nation	Re- marks
C146			CC45FSL1H101J	100PF	J	
C147-148			CC45FSL1H221J	220PF	J	
C149-150			CE04KW1A470M	47UF	10WV	
C151-152			CC45FSL1H680J	68PF	J	
C153			CE04KW2A010M	1.0UF	100WV	
C155-158			CK45FB1H152K	1500PF	K	
C159-160			CC45FSL1H020C	2.0PF	C	
C161-162			CC45FSL2H680J	68PF	J	
C165-168			CK45FE1H103Z	0.010UF	Z	
C171-172			CQ93FMG1H104J	0.10UF	J	
C173			CE04KWQJ221M	220UF	6.3WV	
C174			CE04KW1V47R7M	4.7UF	35WV	8
C178-179			CQ93FMG1H392J	3900PF	J	7
C178-179			CQ93FMG1H822J	8200PF	J	
C181			CK45FF1H103Z	0.010UF	Z	
C182			CE04KW1E101M	100UF	25WV	
C184			CE04KW1A470M	4.7UF	10WV	
C185			CE04KW1V47R7M	4.7UF	35WV	
C186			CK45FF1H103Z	0.010UF	Z	
C187-192			CQ93FMG1H102J	1000PF	J	8
C195			CK45FB1H561K	560PF	K	
C196-197			CK45FF1H103Z	0.010UF	Z	
C201-204			CK45FB1H471K	470PF	K	
C205			CQ93FMG1H471J	470PF	J	
C215-216			CQ93FMG1H102J	1000PF	J	8
C221-224			C91-1480-05	0.22UF	250WV	
C225-226			CC45FSL2H121J	120PF	J	8
C225-226			CC45FSL2H330J	47PF	J	7
C227			CC45FSL2H330J	33PF	J	
C231-232			CQ93FMG1H102J	1000PF	J	8
C233			CE04HW1E100M	NP-ELEC		
C238			CE04KW1H2R2M	ELECTRO		
C239-242			CQ93FMG1H104J	MYLAR	25WV	
C243-244			CQ93FMG1H562J	MYLAR	50WV	
C251-252			CE04KW1H2R2M	ELECTRO	50WV	
C253			CE04KW1C220M	ELECTRO	16WV	
C254			CE04KW1C101M	ELECTRO	16WV	
C255			CQ93FMG1H103J	MYLAR	100PF	8
C256-259			CQ93FMG1H101K	MYLAR	100PF	8
C261-262			CF92FV1H105J	MF-C	1.0UF	
C263-264			CQ93FMG1H101K	MYLAR	100PF	8
C271			CE04KW1C470M	ELECTRO	47UF	
C272			CQ93FMG1H102J	MYLAR	1000PF	8
C343-344			CC45FSL1H221J	CERAMIC	220PF	
C345			CF92FV1H224J	MF-C	0.22UF	
C346			CF92FV1H684J	MF-C	0.68UF	
C347			CQ93FMG1H101K	MYLAR	100PF	8
C351-352			CE04KW1H2R2M	ELECTRO	2.2UF	
C353			CE04KW1H100M	ELECTRO	10UF	
C354			CE04KW1C470M	ELECTRO	47UF	
C355			CQ93FMG1H101K	MYLAR	100PF	8
C357			CQ93FMG1H103J	MYLAR	0.010UF	8
CN1			E40-4609-05	PIN ASSY (15P)		
CN2			E40-4914-05	FLAT CABLE CONNECTOR (27P)		

L : Scandinavia K : USA P : Canada 7 : KR-V7080  
Y : PX(Far East, Hawaii) T : Europe E : Europe 8 : KR-V8080  
V : AAFES(Europe) X : Australia M : Other Areas  
⚠ indicates safety critical components.

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

5

Ref. No	Add- ress	New Parts	Parts No.	Description	Desti- nation	Re- marks
CN4			E40-4245-05	PIN ASSY (3P)		
J1-3			E63-0139-15	PHONO JACK (6P)		
J4			E63-0164-05	PHONO JACK (SUB WOOFER)		
J6			E70-0065-05	LOCK TERMINAL BOARD (F/R SP)		
J7		*	E70-0065-05	SCREW TERMINAL BOARD (F/C SP)		8
J7			E70-0064-05	SCREW TERMINAL BOARD (F/C SP)	KPY	
J8			E03-0148-05	AC OUTLET	EM	
J8			E03-0149-05	AC OUTLET	T	
J8			E03-0310-05	AC OUTLET	X	
J8			E03-0325-05	AC OUTLET	C	
J8			E03-0330-05	AC OUTLET		
W212,213			E29-1614-03	LEAD PLATE		8
W214		*	E29-1615-04	LEAD PLATE		8
W215,216		*	E29-1616-04	LEAD PLATE		8
F1			F05-3121-05	FUSE (SEMKO)	YXTEMC	
F1			F05-0078-05	FUSE(5X20)	E	
F2			F05-2525-05	FUSE (SEMKO)	YM	
F2			F05-3121-05	FUSE (SEMKO)	KP	
F3,4			F50-0078-05	FUSE(5X20)		
F5,6			F04-1026-05	FUSE (UL)	KP	
F5,6			F06-1022-05	FUSE (SEMKO)	YXTEMC	
CN7,8			J13-0075-05	FUSE CLIP		
CN10,11			J13-0075-05	FUSE CLIP	YEM	
CN12-15			J13-0075-05	FUSE CLIP	KP	
CN16-19			J13-0075-05	FUSE CLIP		
J9			J11-0809-05	WIRE CLAMPER		
J10,11			J11-0809-05	WIRE CLAMPER		8
T1			L07-0864-05	POWER TRANSFORMER		
T1			L07-0865-05	POWER TRANSFORMER	KP	
T1			L07-0866-05	POWER TRANSFORMER	YM	
T1			L07-0867-05	POWER TRANSFORMER	X	
T1			L07-2114-05	POWER TRANSFORMER	TE	
CP1-3			R90-0840-05	RD	C	
CP4			R90-0186-05	MULTI-COMP		
R27			RD14NB2E470J	0.22 5W		
R30			RS14KB3D822J	0.47X2		
R41			RD14NB2E101J	47 J 1/4W		
R42			RD14NB2E180J	18 J 1/4W		
R43-45			RS14KB3D331J	330 J 2W		
R49			RD14NB2E682J	6.8K J 1/4W		
R54			RD14NB2E3R3J	3.3 J 1/4W		
R55			RD14NB2E470J	47 J 1/4W		
R99,100			RD14NB2E470J	47 J 1/4W		
R115-118			RD14NB2E221J	220 J 1/4W		
R123,124			RD14NB2E121J	120 J 1/4W		
R133-136			RD14NB2E220J	22 J 1/4W		
R137,138			RD14NB2E332J	3.3K J 1/4W		
R143,144			RS14KB3D4R7J	4.7 J 2W		
R165-168			RD14NB2E221J	220 J 1/4W		
R173,174			RD14NB2E121J	120 J 1/4W		
R183-186			RD14NB2E220J	22 J 1/4W		
R187,188			RD14NB2E332J	3.3K J 1/4W		
R193,194			RS14KB3D4R7J	4.7 J 2W		

L : Scandinavia K : USA P : Canada  
Y : PY(Far East, Hawaii) T : Europe E : Europe  
Y : AAFES(Europe) X : Australia M : Other Areas  
7 : KR-V7080  
8 : KR-V8080  
A indicates safety critical components.

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

6

Ref. No	Add- ress	New Parts	Parts No.	Description	Desti- nation	Re- marks
R234			R92-1769-05	CARBON		
R374,375			RD14NB2E820J	TRIMMING POT. (1K ADJUSTMENT)		
VR1-4			R12-1616-05	MAGNETIC RELAY (SP RELAY)	1/2W	
K1-3			S76-0038-05	MAGNETIC RELAY (SP RELAY)	J	
K1-3			S76-0045-05	MAGNETIC RELAY (SP RELAY)	1/4W	
K5		*	S76-0009-05	MAGNETIC RELAY		
K5			S76-0044-05	MAGNETIC RELAY		
S1			S31-2136-05	SLIDE SWITCH (IMPEDANCE SEL)		
S2			S31-2322-05	SLIDE SWITCH (120-/220-/240-)		YM
S3			S62-0001-05	SLIDE SWITCH (120-/240-)		YM
D1			RBV-602LFA	DIODE		
D3-8			S5688B	DIODE		
D3-8			TSR139-100	DIODE		
D9			HZS4.7N(B2)	ZENER DIODE		
D9			RD4.7ES(B2)	ZENER DIODE		
D10			HSS104	DIODE		
D10			1SS133	DIODE		
D11			HZS6.2N(B2)	ZENER DIODE		
D11			RD6.2ES(B2)	ZENER DIODE		
D12			HZS8.2N(B2)	ZENER DIODE		
D12			RD8.2ES(B2)	ZENER DIODE		
D13,14			HZS16N(B2)	ZENER DIODE		
D13,14			RD16ES(B2)	ZENER DIODE		
D15-20			HSS104	DIODE		
D15-20			1SS133	DIODE		
D21-24			HSS104A	DIODE		
D21-24			1SS131	DIODE		
D25			HZS5.1N(B2)	ZENER DIODE		
D25			RD5.1ES(B2)	ZENER DIODE		
D29			HSS104A	DIODE		
D29			1SS131	DIODE		
D30			HZS5.1N(B2)	ZENER DIODE		
D30			RD5.1ES(B2)	ZENER DIODE		
D31,32			S5688B	DIODE		KP
D31,32			TSR139-100	DIODE		KP
D48			HSS104	DIODE		
D48			1SS133	DIODE		
D49			HSS104A	DIODE		
D49			1SS131	DIODE		
D50-53			S5688B	DIODE		
D50-53			TSR139-100	DIODE		
D54			HZS6.2N(B2)	ZENER DIODE		
D54			RD6.2ES(B2)	ZENER DIODE		
D55,56			HSS104A	DIODE		
D55,56			1SS131	DIODE		
D57			HZS2.7N(B2)	ZENER DIODE		
D57			RD2.7ES(B2)	ZENER DIODE		
D59			HSS104	DIODE		
D59			1SS133	DIODE		
D64			HSS104A	DIODE		
D64			1SS131	DIODE		
D71,72			HZS8.2N(B2)	ZENER DIODE		
D71,72			RD8.2ES(B2)	ZENER DIODE		
D73			HZS10N(B)	ZENER DIODE		

L : Scandinavia K : USA P : Canada  
Y : PY(Far East, Hawaii) T : Europe E : Europe  
Y : AAFES(Europe) X : Australia M : Other Areas  
7 : KR-V7080  
8 : KR-V8080  
A indicates safety critical components.

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

7

Ref. No	Add- ress	New Parts	Parts No.	Description	Desti- nation	Re- marks
D73			RD10ES(B)	ZENER DIODE		
D75_76			HZS6.2N(B2)	ZENER DIODE		
D77_78			RD8.2ES(B2)	ZENER DIODE		
D77_78			S5688B	DIODE		
D77_78			1SR139-100			
D79			HSS104	DIODE		
D79			1SS133	DIODE		
D80			HZS5.1N(B2)	ZENER DIODE		
D80			RD5.1ES(B2)	ZENER DIODE		
D90			HSS104	DIODE		
IC1			1SS133	DIODE		
IC2			NJM4580L-D	IC(OP AMP X2)		
IC3			NJM4565L-D	ANALOGUE IC		
IC4			NJM4560D-D	IC(OP AMP X2)		
IC5			NJU7312AL	ANALOGUE IC		
IC6			NJU7311AL	ANALOGUE IC		
IC7			TDA7315	ANALOGUE IC		
Q2			TDA7345D	ANALOGUE IC		
Q3			2SC2878(B)	TRANSISTOR		
Q3			2SD2012	TRANSISTOR		
Q3			2SD2061(E,F)	TRANSISTOR		
Q5			2SC2458(Y,GR)	TRANSISTOR		
Q5			2SC3311A(Q,R)	TRANSISTOR		
Q6			2SB1370(E,F)	TRANSISTOR		
Q6			2SB1375	TRANSISTOR		
Q7			2SC2458(Y,GR)	TRANSISTOR		
Q7			2SC3311A(Q,R)	TRANSISTOR		
Q8			2SA1048(Y,GR)	TRANSISTOR		
Q8			2SA1309A(Q,R)	TRANSISTOR		
Q9			2SA1309A(Q,R)	TRANSISTOR		
Q9			2SA1534A(R,S)	TRANSISTOR		
Q10-12			DTC113ZS	DIGITAL TRANSISTOR		
Q10-12			UN4219	TRANSISTOR		
Q14			2SA1048(Y,GR)	TRANSISTOR		
Q14			2SA1309A(Q,R)	TRANSISTOR		
Q15-18			2SC2878(B)	TRANSISTOR		
Q19			DTC124ES	DIGITAL TRANSISTOR		
Q19			UN4212	TRANSISTOR		
Q20			2SC2458(Y,GR)	TRANSISTOR		
Q20			2SC3311A(Q,R)	TRANSISTOR		
Q21-24			2SA992(F,E)	TRANSISTOR		
Q25-28			2SC2631(R,S)	TRANSISTOR		
Q29_30			2SA1123(R,S)	TRANSISTOR		
Q31_32			2SC1845(F,E)	TRANSISTOR		
Q33-36			2SA992(F,E)	TRANSISTOR		
Q37-40			2SC2631(R,S)	TRANSISTOR		
Q41_42			2SA1123(R,S)	TRANSISTOR		
Q43-46			2SC1845(F,E)	TRANSISTOR		
Q47_48			2SA992(F,E)	TRANSISTOR		
Q49_50			2SC2878(B)	TRANSISTOR		
Q63			2SC2003(L,K)	TRANSISTOR		
Q64			2SC3940A(R,S)	TRANSISTOR		
Q90			DTC124ES	DIGITAL TRANSISTOR		
Q90			UN4212	TRANSISTOR		
Q101,102			2SD2222 #5	TRANSISTOR		
Q103,104			2SB1470 #5	TRANSISTOR		

L : Scandinavia  
Y : PX(Far East, Hawaii)  
Y : AAFES(Europe)  
K : USA  
P : Canada  
T : Europe  
X : Australia  
M : Other Areas  
C : China  
7 : KR-V7080  
8 : KR-V8080  
Δ indicates safety critical components.

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

8

Ref. No	Add- ress	New Parts	Parts No.	Description	Desti- nation	Re- marks
Q105,106			2SC4137F50(V,W)	TRANSISTOR		
Q107,108		*	2SD2389	TRANSISTOR		
Q109,110			2SB1559	TRANSISTOR		
Q111,112		*	2SC4137F50(V,W)	TRANSISTOR		
DISPLAY UNIT (X14-4120-XX/X14-4132-XX)						
D17-19			B30-2461-05	LED(RED,5 1/4)		
C1			C90-3253-05	ELECTRO		
C2			CE04KW1H010M	ELECTRO		
C3			C90-1827-05	ELECTRO		
C4			CE04KW1A221M	ELECTRO		
C5,6			C90-3242-05	ELECTRO		
C7			CE04KW1C330M	ELECTRO		
C8-10			C91-0769-05	CERAMIC		
C11			CC73FCH1H470J	CHIP C		
C12			CE04KW1H2R2M	ELECTRO		
C13			CC45FSL1H331J	CERAMIC		
C14			CK73FB1H103K	CHIP C		
C15			CC73FCH1H220J	CHIP C		
C16			CC45FSL1H561J	CERAMIC		
C17			CE04KW1C100M	ELECTRO		
C18			CK73FB1H103K	CHIP C		
C19			CE04KW1C100M	ELECTRO		
C20			CK73FB1H102K	CHIP C		
C21			C91-1488-05	MF		
C22_23			CK45FF1H103Z	CERAMIC		
C24			CK73FB1E473K	CHIP C		
C101-104			CO93FMG1H103J	MYLAR		
C105			CK73FB1H102K	CHIP C		
C131,132			CK45FB1H561K	CERAMIC		
C133			CK45FF1H223Z	CERAMIC		
C200			CK45FF1H473Z	CERAMIC		
C301,302			CK73FB1H103K	CHIP C		
C303			CE04KW1C100M	ELECTRO		
C304			CE04KW1A470M	ELECTRO		
C304			CK73FB1E473K	CHIP C		
C305			CE04KW1C100M	ELECTRO		
C305			CK73FB1H103K	CHIP C		
C306			CK73FB1E473K	CHIP C		
C307			CE04KW1C100M	ELECTRO		
C308			CE04KW1H010M	ELECTRO		
C308			CK73FB1H103K	CHIP C		
C309			CE04KW1HR47M	ELECTRO		
C310			CE04KW1H2R2M	ELECTRO		
C310			CK73FB1H102K	CHIP C		
C311			CE04KW1HR47M	ELECTRO		
C311			CE04KW1V4R7M	ELECTRO		
C312			CK73FB1E473K	CHIP C		
C312			CC73FCH1H220J	CHIP C		
C313			CE04KW1H010M	ELECTRO		
C314			CE04KW1A101M	ELECTRO		
C314			CE04KW1H2R2M	ELECTRO		
C315			CK73FB1H472K	CHIP C		
C316			CE04KW1H010M	ELECTRO		
C317,318			CE04KW1C100M	ELECTRO		

L : Scandinavia  
Y : PX(Far East, Hawaii)  
Y : AAFES(Europe)  
K : USA  
P : Canada  
T : Europe  
X : Australia  
M : Other Areas  
C : China  
7 : KR-V7080  
8 : KR-V8080  
Δ indicates safety critical components.

# KR-V7080/V8080

## PARTS LIST

KR-V7080/V8080

PARTS LIST

9

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C363			CK73FB1H103K	CHIP C	TE	
C364			CE04KW1H010M	ELECTRO	TE	
C365			CE04KW1H010M	ELECTRO	KPYXMC	
C366			CK73FB1E473K	CHIP C	TE	
			CK73FB1H102K	CHIP C	KPYXMC	
C371			CE04KW1C100M	ELECTRO	KPYXMC	
C372			CE04KW1C470M	ELECTRO	KPYXMC	
C403-406			CE04KW1HR47M	ELECTRO	KPYXMC	
C407			CK73FB1E473K	CHIP C	KPYXMC	
C412			CC73FSL1H101J	CHIP C	KPYXMC	
C414			CK73FSL1H681K	CHIP C	KPYXMC	
C415-416			CK73FSL1H101J	CHIP C	KPYXMC	
C421-422			CE04KW1C470M	ELECTRO	KPYXMC	
C425			CQ93FMG1H682J	MYLAR	YMC	
C438			CQ93FMG1H682J	MYLAR	YMC	
C482			CC73FSL1H150J	CHIP C	KPYXMC	
C501			CQ93FMG1H223J	MYLAR		
C502			CQ93FMG1H473J	MYLAR		
C503			CE04KW1A221M	ELECTRO		
C504-507			CE04KW1C100M	ELECTRO		
C508			CE04KW1A221M	ELECTRO		
C509-510			CQ93FMG1H104J	MYLAR		
C511			CE04KW1HR47M	ELECTRO		
C512			CE04KW1V4R7M	ELECTRO		
C513			CE04KW1HR47M	ELECTRO		
C514			CE04KW1V4R7M	ELECTRO		
C515			CF92FV1H154J	MF-C		
C516			CE04KW1H3R3M	ELECTRO		
C517-518			CF92FV1H154J	MF-C		
C519			CE04KW1H3R3M	ELECTRO		
C520			CF92FV1H154J	MF-C		
C521			CE04KW1V4R7M	ELECTRO		
C522			CE04KW1HR47M	ELECTRO		
C523			CE04KW1V4R7M	ELECTRO		
C524			CE04KW1HR47M	ELECTRO		
C525-526			CQ93FMG1H104J	MYLAR		
C527			CE04KW1C470M	ELECTRO		
C528-529			CF92FV1H474J	MF-C		
C530-531			CE04KW1C100M	ELECTRO		
C532			CQ93FMG1H681J	MYLAR		
C533-535			CE04KW1H010M	ELECTRO		
C536			CE04KW1C100M	ELECTRO		
C537			CK73FB1H103K	CHIP C		
C538			CE04KW1H2R2M	ELECTRO		
C539			CE04KW1C100M	ELECTRO		
C540			CE04KW1HR33M	ELECTRO		
C541			CE04KW1C100M	ELECTRO		
C542			CE04KW1A221M	ELECTRO		
C543-544			CE04KW1C100M	ELECTRO		
C545			CE04KW1HR47M	ELECTRO		
C546			CQ93FMG1H823J	MYLAR		
C547			CQ93FMG1H832J	MYLAR		
C548			CQ93FMG1H823J	MYLAR		
C549			CE04KW1A221M	ELECTRO		
C550			CK73FB1H102K	CHIP C		

9

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C319-320			CQ93FMG1H273J	MYLAR	TE	
C321			CK73FB1H103K	CHIP C	TE	
C321			CQ93FMG1H163J	MYLAR	YXMC	
C322			CQ93FMG1H243J	MYLAR	KP	
			CC73FSL1H101J	CHIP C	TE	
C322			CQ93FMG1H163J	MYLAR	YXMC	
C322			CQ93FMG1H243J	MYLAR	KP	
C323			CE04KW1H010M	ELECTRO	KPYXMC	
C323			CE04KW1H2R2M	ELECTRO	TE	
C324			CE04KW1H2R2M	ELECTRO	TE	
C324			CE04KW1H3R3M	ELECTRO	KPYXMC	
C325			CE04KW1C100M	ELECTRO	KPYXMC	
C325			CK73FB1H562K	CHIP C	TE	
C326			CK73FB1H562K	CHIP C	TE	
C327			CK73FB1E473K	CHIP C	TE	
C328			CC73FSL1H150J	CHIP C	TE	
C328			CE04KW1C100M	ELECTRO	KPYXMC	
C329			CE04KW1H010M	ELECTRO	TE	
C330			CE04KW1C470M	ELECTRO	TE	
C331			CE04KW1A470M	ELECTRO	KPYXMC	
C331			CK73FB1E473K	CHIP C	TE	
C332			CK73FB1H103K	CHIP C	TE	
C333			CK73FCH1H270J	CHIP C	TE	
C334			CK73FCH1H220J	CHIP C	TE	
C335-336			CC73FSL1H101J	CHIP C	TE	
C335-336			CK73FB1H471K	CHIP C	KPYXMC	
C338			CC73FSL1H101J	CHIP C	TE	
C338			CK73FB1H471K	CHIP C	KPYXMC	
C339			CE04KW1C470M	ELECTRO	KPYXMC	
C340			CK73FB1H223K	CHIP C	KPYXMC	
C340			CQ93FMG1H223J	MYLAR	TE	
C341			CE04KW1H2R2M	NP-ELEC	TE	
C341			CE04KW1H010M	ELECTRO	KPYXMC	
C342-343			CK73FB1H103K	CHIP C	TE	
C344			CE04KW1A470M	ELECTRO	TE	
C345			CE04KW1C470M	ELECTRO	TE	
C346			CE04KW1H010M	ELECTRO	TE	
C347			CK73FB1H103K	CHIP C	TE	
C348			CE04KW1H010M	ELECTRO	TE	
C349			CK73FB1H103K	CHIP C	TE	
C350			CC73FCH1H330J	CHIP C	TE	
C350			C91-0769-05	CERAMIC	KPYXMC	
C351			CE04KW1H010M	ELECTRO	KPYXMC	
C351			CK73FB1H102K	CHIP C	TE	
C352			CE04KW1C470M	ELECTRO	KPYXMC	
C352			CK73FB1H102K	CHIP C	TE	
C353-354			CK73FB1H102K	CHIP C	TE	
C355			CK73FB1H222K	CHIP C	TE	
C356			CC73FCH1H060D	CHIP C	TE	
C357			CC73FCH1H220J	CHIP C	TE	
C358			CK73FB1E473K	CHIP C	TE	
C359			CK73FB1H102K	CHIP C	TE	
C360			CC73FSL1H101J	CHIP C	TE	
C361			C91-0745-05	CERAMIC	TE	
C362			CC45FSL1H020C	CERAMIC	TE	

L : Scandinavia  
Y : PX(Far East, Hawaii)  
Y : AAFES(Europe)

K : USA  
T : Europe  
X : Australia

P : Canada  
E : Europe  
M : Other Areas

C : China

7 : KR-V7080  
8 : KR-V8080

△ indicates safety critical components.

# KR-V7080/V8080

## PARTS LIST

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
X301			L77-2159-05	CRYSTAL RESONATOR(7.2MHZ)		
X302			L78-0637-05	RESONATOR (456KHZ)		
X501		*	L78-0290-05	RESONATOR (8MHZ)		
CP1			R90-0492-05	MULTI-COMP		
R1			RK73FB2B101J	CHIP R	1/8W	
R3-5			RK73FB2A101J	CHIP R	1/8W	
R6			RK73FB2A102J	CHIP R	1/10W	
R8			RK73FB2A104J	CHIP R	1/10W	
R9			RK73FB2A102J	CHIP R	1/10W	
R10 ,11			RK73FB2A103J	CHIP R	1/10W	
R15 ,16			RK73FB2A331J	CHIP R	330	
R17 ,18			RK73FB2A104J	CHIP R	1/10W	
R19 ,20			RD14NB2E221J	RD	220	
R22			RD14NB2E100J	RD	10	
R23 -27			RK73FB2A102J	CHIP R	1/4W	
R28 -30			RK73FB2A103J	CHIP R	1/10W	
R38 ,39			RK73FB2A472J	CHIP R	1/10W	
R44 ,45			RK73FB2A103J	CHIP R	1/10W	
R52			RK73EB2B103J	CHIP R	1/8W	
R54			RK73FB2A222J	CHIP R	2.2K	
R69 -72			RK73FB2A101J	CHIP R	100	
R75 -77			RK73FB2A101J	CHIP R	1/10W	
R80			RK73FB2A222J	CHIP R	2.2K	
R82 ,83			RK73FB2A223J	CHIP R	22K	
R111 ,112			RK73FB2A683J	CHIP R	1/10W	
R113 ,114			RK73EB2B683J	CHIP R	68K	
R115-120			RK73FB2A683J	CHIP R	1/8W	
R121			RK73EB2B683J	CHIP R	68K	
R122-125			RK73FB2A683J	CHIP R	1/10W	
R131 ,132			RS14KB3D561J	FL-PROOF RS	2W	
R301			RK73FB2A681J	CHIP R	680	
R302			RK73FB2A332J	CHIP R	3.3K	
R303			RK73FB2A331J	CHIP R	330	
R304			RK73FB2A100J	CHIP R	3.9K	
R305			RK73FB2A470J	CHIP R	10	
R306			RK73FB2A101J	CHIP R	47	
R307			RK73FB2A331J	CHIP R	100	
R308			RK73FB2A392J	CHIP R	1/10W	
R309			RK73FB2A332J	CHIP R	3.9K	
R310			RK73FB2A473J	CHIP R	2.2K	
R311			RK73FB2A562J	CHIP R	47K	
R311			RS14KB3A820J	FL-PROOF RS	5.6K	
R312			RK73FB2A302J	CHIP R	82	
R313			RK73FB2A393J	CHIP R	3.0K	
R314			RK73FB2A472J	CHIP R	39K	
R315			RK73FB2A391J	CHIP R	4.7K	
R316			RK73FB2A473J	CHIP R	390	
R317			RK73FB2A104J	CHIP R	47K	
R318			RK73FB2A392J	CHIP R	100K	
R319			RK73FB2A333J	CHIP R	3.9K	
R319			RK73FB2A222J	CHIP R	33K	
R319			RK73FB2A222J	CHIP R	2.2K	
R320			RK73FB2A332J	CHIP R	3.3K	
R320			RK73FB2A222J	CHIP R	2.2K	

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C551			CE04KW1C100M	ELECTRO		
C552			CK73FB1H103K	CHIP C	16WV	
C553,554			CE04KW1C100M	ELECTRO	10UF	
C555			CQ93FMG1H222J	MYLAR	0.010UF	
C556			CQ93FMG1H222J	MYLAR	2200PF	
C557 ,558			CF92EV1H101K	MF-C	0.010UF	
C561-572			CE04KW1C101M	CHIP C	100PF	
C601			CE04KW1C470M	CHIP C	47UF	
C602			CE04KW1C101M	ELECTRO	100UF	
C604			CK73FB1H103K	CHIP C	0.010UF	
C605			CK73FB1E104K	CHIP C	0.10UF	
C606			CE04KW1H010M	ELECTRO	0.10UF	
C703,704			CE04KW1H470J	CHIP C	47PF	
C705-707			CE04KW1C100M	ELECTRO	10UF	
C708			CK73FB1H103K	CHIP C	0.010UF	
C709			CE04KW1A221M	ELECTRO	220UF	
C710			CK73FB1H103K	CHIP C	0.010UF	
C711 ,712			CK73FB1H221J	CHIP C	220PF	
C713			CK73FB1H103K	CHIP C	0.010UF	
CN501			E40-4609-05	PIN ASS'Y (15P)		
CN502			E40-4294-05	FLAT CABLE CONNECTOR (4P)		
CN503			E40-4914-05	FLAT CABLE CONNECTOR (27P)		
J1			E11-0272-05	PHONE JACK (PHONES)		
J301			E70-0052-05	LOCK TERMINAL BOARD		
J701			E63-0138-15	PHONO JACK(4P VIDEO)		
J702			E11-0188-05	MINIATURE PHONE JACK(2P S.CON)		
E102			J11-0809-05	WIRE CLAMPER		
E103-106			J11-0808-05	WIRE CLAMPER		
CF301,302			L72-0531-05	CERAMIC FILTER		
CF301,302			L72-0536-05	CERAMIC FILTER		
CF303			L72-0574-05	CERAMIC FILTER		
L1,2			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K)		
L3			L40-1091-17	SMALL FIXED INDUCTOR(1UH)		
L4			L40-1091-17	SMALL FIXED INDUCTOR(1UH)		
L301,302			L79-1219-05	LC FILTER		
L303			L30-0910-05	FM IFT		
L305			L79-0125-05	LC FILTER		
L306			L39-1328-05	COMBINATION COIL		
L306			L39-1337-05	COMBINATION COIL		
L307			L30-0467-05	AM IFT		
L308,309			L40-1091-17	SMALL FIXED INDUCTOR(1UH)		
L310			L40-1091-17	SMALL FIXED INDUCTOR(1UH)		
L311			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K)		
L311			L40-1021-14	SMALL FIXED INDUCTOR(1.0MH,K)		
L312			L40-1091-17	SMALL FIXED INDUCTOR(1UH)		
L403			L39-1328-05	COMBINATION COIL		
L403			L39-1337-05	COMBINATION COIL		
L406			L40-1091-17	SMALL FIXED INDUCTOR(1UH)		
L601			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K)		
L602			L40-1091-17	SMALL FIXED INDUCTOR(1UH)		
X1			L78-0267-05	RESONATOR (4.194MHZ)		
X2			L78-0244-05	RESONATOR (4.000MH)		
X3			L77-2002-05	CRYSTAL RESONATOR(4.332MHZ)		

L : Scandinavia  
Y : PX(Far East, Hawaii)  
Y : AAFES(Europe)

K : USA  
T : Europe  
X : Australia

P : Canada  
E : Europe  
M : Other Areas

C : China

7 : KR-V7080  
8 : KR-V8080

△ indicates safety critical components.

KR-V7080/V8080

\* New Parts  
 Parts without **Parts No.** are not supplied.  
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
 Teile ohne **Parts No.** werden nicht geliefert.

74

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R381			RK73FB2A563J	CHIP R	1/10W	TE
R384			RK73FB2A101J	CHIP R	1/10W	TE
R401, 402			RK73FB2A393J	CHIP R	1/10W	KPYXMC
R405, 406			RK73FB2A123J	CHIP R	1/10W	KPYXMC
R411			RD14NB2E470J	RD	1/4W	KPYXMC
R418			RK73FB2A122J	CHIP R	1/10W	KPYXMC
R419			RK73FB2A123J	CHIP R	1/10W	KPYXMC
R422			RK73FB2A122J	CHIP R	1/10W	KPYXMC
R423			RK73FB2A123J	CHIP R	1/10W	KPYXMC
R424			RK73FB2A103J	CHIP R	1/10W	KPYXMC
R425, 426			RK73FB2A393J	CHIP R	1/10W	KPYXMC
R427, 428			RD14NB2E101J	RD	1/4W	KPYXMC
R431, 432			RK73FB2A393J	CHIP R	1/10W	KPYXMC
R438, 439			RK73FB2A561J	CHIP R	1/10W	KPYXMC
R440, 441			RK73FB2A473J	CHIP R	1/10W	YMC
R451			RK73FB2A821J	CHIP R	1/10W	KPYXMC
R452			RK73FB2A473J	CHIP R	1/10W	KPYXMC
R453			RK73FB2A472J	CHIP R	1/10W	KPYXMC
R457			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R467			RK73FB2A104J	CHIP R	1/10W	KPYXMC
R501, 502			RK73FB2A103J	CHIP R	1/10W	KPYXMC
R503, 504			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R509			RK73FB2A473J	CHIP R	1/10W	KPYXMC
R510			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R511			RK73FB2A222J	CHIP R	1/10W	KPYXMC
R512			RK73FB2A473J	CHIP R	1/10W	KPYXMC
R513			RK73FB2A100J	CHIP R	1/10W	KPYXMC
R514			RK73FB2A223J	CHIP R	1/10W	KPYXMC
R518			RK73FB2A393J	CHIP R	1/10W	KPYXMC
R519			RK73FB2A105J	CHIP R	1/10W	KPYXMC
R521			RK73FB2A473J	CHIP R	1/10W	KPYXMC
R522			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R523			RK73FB2A222J	CHIP R	1/10W	KPYXMC
R524			RK73FB2A473J	CHIP R	1/10W	KPYXMC
R525			RK73FB2A100J	CHIP R	1/10W	KPYXMC
R526, 527			RK73FB2A104J	CHIP R	1/10W	KPYXMC
R528			RK73FB2A223J	CHIP R	1/10W	KPYXMC
R531, 532			RK73FB2A104J	CHIP R	1/10W	KPYXMC
R557			RK73FB2A223J	CHIP R	1/10W	KPYXMC
R601			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R602			RK73FB2A222J	CHIP R	1/10W	KPYXMC
R603			RK73FB2A393J	CHIP R	1/10W	KPYXMC
R604			RK73FB2A103J	CHIP R	1/10W	KPYXMC
R606			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R607			RS14KB3D270J	FL-PROOF RS	2W	KPYXMC
R701, 704			RK73FB2A750J	CHIP R	1/10W	KPYXMC
R705, 706			RK73FB2A393J	CHIP R	1/10W	KPYXMC
R707, 708			RS14KB3A391J	FL-PROOF RS	1W	KPYXMC
W201			R92-0670-05	CHIP R	0 OHM	TE
W300			R92-0679-05	CHIP R	0 OHM	TE
W401			R92-0670-05	CHIP R	0 OHM	TE
W406			R92-0670-05	CHIP R	0 OHM	TE
W408-411			R92-0670-05	CHIP R	0 OHM	TE
W414-416			R92-0670-05	CHIP R	0 OHM	TE
W418, 419			R92-0670-05	CHIP R	0 OHM	TE

\* New Parts  
 Parts without **Parts No.** are not supplied.  
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
 Teile ohne **Parts No.** werden nicht geliefert.

73

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R321, 322			RK73FB2A122J	CHIP R	1/10W	TE
R321, 322			RK73FB2A393J	CHIP R	1/10W	KPYXMC
R323			RK73FB2A472J	CHIP R	1/10W	TE
R324			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R324			RK73FB2A472J	CHIP R	1/10W	TE
R325			RK73FB2A103J	CHIP R	1/10W	KPYXMC
R325			RK73FB2A561J	CHIP R	1/10W	TE
R326			RK73FB2A472J	CHIP R	1/10W	TE
R327			RK73FB2A473J	CHIP R	1/10W	TE
R328			RK73FB2A821J	CHIP R	1/10W	TE
R329, 330			RK73FB2A102J	CHIP R	1/10W	TE
R331			RK73FB2A822J	CHIP R	1/10W	TE
R331			RS14KB3D221J	FL-PROOF RS	2W	KPYXMC
R332, 333			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R332, 333			RK73FB2A472J	CHIP R	1/10W	TE
R334			RK73FB2A104J	CHIP R	1/10W	KPYXMC
R335			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R335			RK73FB2A472J	CHIP R	1/10W	TE
R336, 337			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R338			RK73FB2A102J	CHIP R	1/10W	TE
R338			RK73FB2A221J	CHIP R	1/10W	KPYXMC
R339			RK73FB2A822J	CHIP R	1/10W	KPYXMC
R340			RK73FB2A102J	CHIP R	1/10W	KPYXMC
R340			RK73FB2A471J	CHIP R	1/10W	TE
R341			RK73FB2A821J	CHIP R	1/10W	TE
R342			RD14NB2E101J	RD	1/4W	KPYXMC
R343			RK73FB2A103J	CHIP R	1/10W	KPYXMC
R344			RK73FB2B221J	CHIP R	1/8W	TE
R345			RK73FB2A122J	CHIP R	1/10W	TE
R346			RK73FB2A750J	CHIP R	1/10W	TE
R347			RK73FB2A681J	CHIP R	1/10W	TE
R346			RK73FB2A621J	CHIP R	1/10W	TE
R349			RK73FB2A104J	CHIP R	1/10W	TE
R350			RK73FB2A471J	CHIP R	1/10W	TE
R351			RK73FB2A181J	CHIP R	1/10W	TE
R352			RK73FB2A104J	CHIP R	1/10W	TE
R352			RK73FB2A472J	CHIP R	1/10W	KPYXMC
R353			RK73FB2A103J	CHIP R	1/10W	TE
R354, 355			RK73FB2A223J	CHIP R	1/10W	TE
R356			RK73FB2A104J	CHIP R	1/10W	TE
R357			RK73FB2A473J	CHIP R	1/10W	TE
R358			RK73FB2A104J	CHIP R	1/10W	TE
R361			RK73FB2A122J	CHIP R	1/10W	TE
R362			RK73FB2A123J	CHIP R	1/10W	TE
R363			RK73FB2A122J	CHIP R	1/10W	TE
R364			RK73FB2A104J	CHIP R	1/10W	KPYXMC
R364			RK73FB2A123J	CHIP R	1/10W	TE
R365			RK73FB2A683J	CHIP R	1/10W	TE
R366			RK73FB2A473J	CHIP R	1/10W	TE
R367			RK73FB2A104J	CHIP R	1/10W	TE
R369			RK73FB2A102J	CHIP R	1/10W	TE
R370			RK73FB2A104J	CHIP R	1/10W	TE
R371			RK73FB2A102J	CHIP R	1/10W	TE
R378			RD14NB2E470J	RD	1/4W	TE
R379			RS14KB3D221J	FL-PROOF RS	2W	TE

L : Scandinavia  
 Y : PX(Far East, Hawaii)  
 Y : AAFES(Europe)  
 K : USA  
 T : Europe  
 X : Australia  
 P : Canada  
 E : Europe  
 M : Other Areas  
 C : China  
 7 : KR-V7080  
 8 : KR-V8080

Δ indicates safety critical components.

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

15

Ref. No	Add- ress	New Parts	Parts No.	Description	Desti- nation	Re- marks
W420,421			R92-0670-05	CHIP R	TE	
W422			R92-0670-05	CHIP R	KPYXMC	
W426			R92-0670-05	CHIP R	KPYXMC	
W446			R92-0670-05	CHIP R	KPYXMC	
W501,502			R92-0670-05	CHIP R		
W503			R92-0679-05	CHIP R	YMC TE	
W504			R92-0679-05	CHIP R	KPYXMC	
W505-508			R92-0679-05	CHIP R		
W510-512			R92-0679-05	CHIP R		
S1			S70-0031-05	TACT SWITCH (REMOTE POWER)		
S2-4			S70-0031-05	TACT SWITCH (RDS)	TE	
S5-36			S70-0031-05	TACT SWITCH		
S39			S40-1138-05	PUSH SWITCH (MAIN POWER)		
S401			S62-0034-05	SLIDE SWITCH (DE-EMPHASIS)	YMC	
S37			T99-0559-05	ROTARY ENCODER(VOLUME CONTROL)		
S38			T99-0571-05	ROTARY ENCODER(INPUT SELECTOR)		
D1			HZS6.2N(B2)	ZENER DIODE		
D1			RD6.2ES(B2)	ZENER DIODE		
D2,3			HSS104	DIODE		
D2,3			1SS133	DIODE		
D4			MA111	DIODE		
D6,7			HSS104	DIODE		
D6,7			1SS133	DIODE		
D8			MA111	DIODE		
D9-14			HSS104	DIODE		
D9-14			1SS133	DIODE		
D16			HSS104A	DIODE	YMC	
D16			1SS131	DIODE	YMC	
D21-28			HSS104A	DIODE		
D21-28			1SS131	DIODE		
D29			HSS104A	DIODE		
D29			1SS131	DIODE		
D31			HSS104A	DIODE		
D31			1SS131	DIODE		
D32-35			HSS104	DIODE	YMC TE	
D32-35			1SS133	DIODE	YMC TE	
D301,302			HSS104	DIODE		
D301,302			1SS133	DIODE		
D303			HZS5.1N(B2)	ZENER DIODE		
D303			RD5.1ES(B2)	ZENER DIODE		
D304			HZS3.3N(B2)	ZENER DIODE	KPYXMC	
D304			HZS8.2N(B2)	ZENER DIODE		
D304			RD3.3ES(B2)	ZENER DIODE	TE	
D304			RD8.2ES(B2)	ZENER DIODE	KPYXMC	
D305			HSS104	DIODE	TE	
D305			1SS133	DIODE	TE	
D306			HZS3.3N(B2)	ZENER DIODE	TE	
D306			RD3.3ES(B2)	ZENER DIODE	TE	
D307			HSS104	DIODE	KPYXMC	
D307			MA111	DIODE	TE	
D307			1SS133	DIODE	TE	
D308			HSS104	DIODE	KPYXMC	
D308			1SS133	DIODE	KPYXMC	

L : Scandinavia  
Y : PX(Far East, Hawaii)  
Y : AAFES(Europe)  
K : USA  
P : Canada  
T : Europe  
X : Australia  
M : Other Areas  
C : China  
7 : KR-V7080  
8 : KR-V8080  
Δ indicates safety critical components.

\* New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

15

Ref. No	Add- ress	New Parts	Parts No.	Description	Desti- nation	Re- marks
D308			1SS268	DIODE	TE	
D309			MA111	DIODE	TE	
D310			MA111	DIODE		
D311			HZS8.2N(B2)	ZENER DIODE	KPYXMC	
D311			RD8.2ES(B2)	ZENER DIODE	KPYXMC	
D411,412			MA111	DIODE		
D601,602			MA111	DIODE		
D603			HZS10N(B)	ZENER DIODE		
D603			RD10ES(B)	ZENER DIODE		
D703,704			HZS5.1N(B2)	ZENER DIODE		
D703,704			RD5.1ES(B2)	ZENER DIODE		
D705,706			HSS104	DIODE		
D705,706			1SS133	DIODE		
ED1			11-MT-32GK	INDICATOR TUBE		
IC1		*	UPD78044AGF160	MI-COM IC	KPYXMC	
IC1		*	UPD78045AGF027	MI-COM IC	TE	
IC2			S-806D-Z	ANALOGUE IC		
IC3			SAAE6579	ANALOGUE IC	TE	
IC4			LC8543H-4D68	MI-COM IC	TE	
IC301			LA1831A-KEN	ANALOGUE IC	KPYXMC	
IC301			LA1836	ANALOGUE IC	TE	
IC302			LC7218	IC(PLL FREQUENCY SYNTHESIZER)		
IC303			M5223P	IC(OP AMP X2)	TE	
IC312			NJM4565D	IC(OP AMP X2)	KPYXMC	
IC501		*	LA2786	ANALOGUE IC		
IC502		*	LV1015	DI BIPOLAR IC		
IC503			NJM4565L-D	ANALOGUE IC		
IC701			NJM2273D	IC(VIDEO IC)		
Q1			2SC4081(R,S)	TRANSISTOR		
Q1			2SC4116(Y,GR)	TRANSISTOR		
Q2			2SC2458(Y,GR)	TRANSISTOR	YMC	
Q2			2SC3311A(Q,R)	TRANSISTOR	YMC	
Q3			2SA1048(Y,GR)	TRANSISTOR		
Q3			2SA1309A(Q,R)	TRANSISTOR		
Q301			2SC2714(R,O)	TRANSISTOR		
Q302			2SC1845(F,E)	TRANSISTOR	KPYXMC	
Q303			2SC2458(Y,GR)	TRANSISTOR	KPYXMC	
Q303			2SC3311A(Q,R)	TRANSISTOR	TE	
Q303			2SC4081(R,S)	TRANSISTOR	TE	
Q303			2SC4116(Y,GR)	TRANSISTOR	TE	
Q304,305			2SC4081(R,S)	TRANSISTOR	TE	
Q304,305			2SC4116(Y,GR)	TRANSISTOR	TE	
Q307		*	2SA1576A(R,S)	TRANSISTOR	TE	
Q307			2SA1586(Y,GR)	TRANSISTOR	TE	
Q307			2SC4081(R,S)	TRANSISTOR	KPYXMC	
Q307			2SC4116(Y,GR)	TRANSISTOR	KPYXMC	
Q308			2SA1576A(R,S)	TRANSISTOR	TE	
Q308			2SA1586(Y,GR)	TRANSISTOR	TE	
Q309			2SC3940A(R,S)	TRANSISTOR	TE	
Q309			2SD863(E,F)	TRANSISTOR	TE	
Q310		*	2SA1576A(R,S)	TRANSISTOR	TE	
Q310			2SA1586(Y,GR)	TRANSISTOR	TE	
Q311			2SC3940A(R,S)	TRANSISTOR	KPYXMC	
Q311			2SD1757K	TRANSISTOR	TE	
Q311			2SD863(E,F)	TRANSISTOR	KPYXMC	

L : Scandinavia  
Y : PX(Far East, Hawaii)  
Y : AAFES(Europe)  
K : USA  
P : Canada  
T : Europe  
X : Australia  
M : Other Areas  
C : China  
7 : KR-V7080  
8 : KR-V8080  
Δ indicates safety critical components.

# KR-V7080/V8080

## PARTS LIST

\* New Parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

17

Ref. No	Add- ress	New Parts	Parts No.	Description	Desti- nation	Re- marks
Q312			2SD1757K	TRANSISTOR	TE	
Q316			2SC4081(R,S)	TRANSISTOR	TE	
Q316			2SC4116(Y,GR)	TRANSISTOR	TE	
Q317		*	2SA1576A(R,S)	TRANSISTOR	TE	
Q317			2SA1586(Y,GR)	TRANSISTOR	TE	
Q318			2SC4081(R,S)	TRANSISTOR	TE	
Q318			2SC4116(Y,GR)	TRANSISTOR	TE	
Q402		*	2SA1576A(R,S)	TRANSISTOR	KPYXMC	
Q402			2SA1586(Y,GR)	TRANSISTOR	KPYXMC	
Q404		*	2SA1576A(R,S)	TRANSISTOR	KPYXMC	
Q404			2SA1586(Y,GR)	TRANSISTOR	KPYXMC	
Q407,408			2SC4081(R,S)	TRANSISTOR	YMC	
Q407,408			2SC4116(Y,GR)	TRANSISTOR	KPYXMC	
Q409,410			2SD1757K	TRANSISTOR	KPYXMC	
Q411		*	2SA1576A(R,S)	TRANSISTOR	KPYXMC	
Q411			2SA1586(Y,GR)	TRANSISTOR	KPYXMC	
Q601-603			DTC124EU	DIGITAL TRANSISTOR		
Q601-603			UN5212	TRANSISTOR		
Q604			2SC3940A(R,S)	TRANSISTOR		
Q604			2SD863(E,F)	TRANSISTOR		
A1			W02-1174-05	ELECTRIC CIRCUIT MODULE	TE	
A301			W02-2509-05	FM FRONT-END ASSY	KPYXMC	
A301			W02-2512-05	FM FRONT-END ASSY		

L : Scandinavia

V : PX(Far East, Hawaii)

V : AAFES(Europe)

K : USA

P : Canada

E : Europe

X : Australia

M : Other Areas

C : China

7 : KR-V7080

8 : KR-V8080

Δ indicates safety critical components.



# KR-V7080/V8080

## SPECIFICATIONS

### Audio section

Rated power output at the STEREO operation

100 watts per channel minimum RMS, both channels driven at 8  $\Omega$ , from 20 Hz to 20,000 Hz with no more than 0.06 % total harmonic distortion. (FTC)

Power output at the SURROUND operation

Front

100 watts per channel minimum RMS, both channels driven, at 8  $\Omega$ , 1 kHz with no more than 0.7 % total harmonic distortion. (FTC)

Center

100 watts minimum RMS at 8  $\Omega$ , 1 kHz with no more than 0.7 % total harmonic distortion. (FTC)

Rear

30 watts per channel minimum RMS, both channels driven, at 8  $\Omega$ , 1 kHz with no more than 0.7 % total harmonic distortion. (FTC)

Total harmonic distortion

.....0.01 % (1 kHz, 50 W, 8  $\Omega$ )

Signal to noise ratio (IHF'66)

PHONO (MM) .....75 dB

LINE (CD) .....95 dB

Input sensitivity / impedance

PHONO (MM) .....2.5 mV / 47 k $\Omega$

CD, TAPE, VIDEO .....200 mV / 47 k $\Omega$

Tone controls

BASS ..... $\pm 8$  dB (at 100 Hz)

TREBLE ..... $\pm 8$  dB (at 10 kHz)

LOUDNESS control at - 30 dB VOLUME level

.....+ 6 dB (100 Hz)

Output level / impedance

Sub woofer preout .....1.0 V / 2.2 k $\Omega$

### Video section

VIDEO inputs / outputs (Composite) .....1 Vp-p / 75  $\Omega$

### FM Tuner section

Tuning frequency range .....87.5 MHz ~ 108 MHz

Usable sensitivity

MONO .....1.2  $\mu$ V (75  $\Omega$ ) / 13.2 dBf  
(75 kHz dev., S/N 30 dB)

50 dB quieting sensitivity

STEREO .....32  $\mu$ V (75  $\Omega$ ) / 41.2 dBf  
(75 kHz dev.)

Total harmonic distortion (1 kHz)

MONO .....0.6 % (65.2 dBf input)

STEREO .....0.7 % (65.2 dBf input)

Signal to noise ratio (1 kHz 75 kHz dev.)

MONO .....75 dB (65.2 dBf input)

STEREO .....68 dB (65.2 dBf input)

Stereo separation

1 kHz .....40 dB

Selectivity (IHF  $\pm 400$  kHz) .....50 dB

Frequency response .....30 Hz ~ 15 kHz, + 0.5 dB, - 3.0 dB

### AM Tuner section

Tuning frequency range .....530 kHz ~ 1,700 kHz

Usable sensitivity (30 % mod., S/N 20 dB)

.....12  $\mu$ V / (500  $\mu$ V / m)

Signal to noise ratio (30 % mod., 1 mV input) .....48 dB

Total harmonic distortion .....0.7 %

Selectivity .....30 dB

### General

Power consumption .....4 A

AC outlet

SWITCHED .....2: (total 65 W, 0.54 A max.)

Dimensions .....W : 440 mm (17-5 / 16")

H : 148 mm (5-13 / 16")

D : 389 mm (15-5 / 16")

Weight (net) .....10.2 kg (22.5 lb)